

## hb000 Handbook Index

- [hb001](#) CVT introduction - the perfect sine wave
- [hb003](#) CVT background
- [hb006](#) CVT how does it work
- [hb009](#) CVT gives lightning protection
- [hb010](#) health and safety data - PCBs in CVT capacit
- [hb011](#) health and safety data - PCBs
- [hb017](#) CVTs with generators
- [hb022](#) Earthing power conditioners
- [hb025](#) CVTs outside specification
- [hb026](#) AIT vs GT
- [hb027](#) 3rd world power protection
- [hb028](#) sizing refrigerator conditioners
- [hb029](#) health and safety data - CVTs
- [hb036](#) CVTs with UPSs
- [hb039](#) CVT start-up surges + fuses 400Vac
- [hb048](#) maintenance of CVTs
- [hb054](#) CVTs approval to international standards
- [hb056](#) special casework for 3-15kVA CVT's
- [hb057](#) CE conformance certificate
- [hb058](#) selecting power conditioners
- [hb059](#) weighing memorandum for special applications
- [hb061](#) AIT series type-test results
- [hb066](#) Safe Installation + 7671 - pt1
- [hb067](#) Safe Installation + 7671 - pt 2
- [hb068](#) Laboratory power facilities
- [hb069](#) CVTs pairing and monitoring
- [hb070](#) 3ph open delta transformers
- [hb071](#) digital camera problems
- [hb072](#) ICT installation considerations
- [hb101](#) retrofit wiring for EPoS
- [hb511](#) MTBF of GT series with ambient
- [hb514](#) COSHH data sheet UPS + PC
- [hb563](#) Preventative maintenance checklist
- [hb572](#) customer actions - top 10
- [hb594](#) method statement for install and commission
- [hb607](#) method statement for fault-find + repair of

- [hb608](#) risk assessment for fault-find + repair of U
- [hb609](#) risk assessment for install of UPS
- [hb702](#) bypass operation
- [hb704](#) delivery and siting
- [hb707](#) UPS vs power conditioning
- [hb708](#) Plug 'n Play battery packs
- [hb712](#) Elite Operation
- [hb713](#) PowerElite Operation
- [hb714](#) MicroBak Operation
- [hb715](#) PC-Power Operation
- [hb716](#) bypass schematics
- [hb718](#) planning an installation
- [hb719](#) bypass schematic - 3 position
- [hb720](#) UPS monitoring and remote interfacing
- [hb721](#) mission critical installations
- [hb724](#) sources of spikes
- [hb725](#) UPS overloads
- [hb726](#) bypass considerations
- [hb727](#) battery testing
- [hb730](#) Series/Parallel Redundancy
- [hb732](#) health and safety data - UPSs
- [hb734](#) MicroBak programming
- [hb735](#) power factor considerations
- [hb738](#) MicroBak performance
- [hb754](#) bypass - special needs auto type
- [hb756](#) generators with UPS
- [hb757](#) earth leakage current with UPSs
- [hb758](#) Environment for power centre
- [hb764](#) UPS fed from 2 sub stations
- [hb805](#) Automatic Battery Test Elite range
- [hb806](#) Parallel operation Master Elite range
- [hb807](#) Emergency Power Off (EPO) and ETA\RTA
- [hb808](#) MTBF and reliability ETA\RTA and ETD
- [hb809](#) Cable length recommendations
- [hb810](#) Battery racks
- [hb811](#) World wide Plugs and Sockets
- [hb921](#) safe battery disposal
- [hb952](#) Safe battery handling

## hb001 CVT introduction the perfect sine wave

### Outstanding Spike and electrical noise protection:

The very best power protection comes from a special type of transformer known as a Constant Voltage Transformer (CVT). Providing unparalleled reliability and conditioning performance, spikes and electrical noise are neutralised with attenuation as high as 75dB.

In addition the input and output transformer windings are physically separated. Known as Galvanic isolation this separation ensures that there is no direct connection between the mains supply and load.

A CVT therefore provides an impenetrable barrier to spikes and high frequency electrical noise. This barrier also works in reverse mode to prevent a 'noisy' load from polluting the mains supply itself.

### Superior sag surge and brownout protection:

Mains voltage sags and surges are automatically corrected by a CVT.

When faced with an extreme surge voltage such as a local lightning strike the power conditioner will present a low impedance to the mains to protect both itself and any connected loads.

### Automatic sine-wave generation:

using ferro resonant transformer technology means that each power conditioner will always generate a pure stable sine-wave even when fed from a polluted mains or square-wave supply.

A = INPUT



B = OUTPUT


NO moving parts NO electronics ONLY magnetic magic

### Perfect switched-mode-power-supply (SMPS) driver:

Ferro resonant transformer technology provides waveform shoulder-lifting - the CVT is the kindest way to drive a switched mode power supply. Input surges are reduced prolonging life and conduction times are lengthened. In addition the CVT provides harmonic buffering and improved reservoir capacitor hold up for the inevitable supply micro breaks which occur with grid protection switching.

**Oscilloscope hold-up picture**


**ride-through picture**

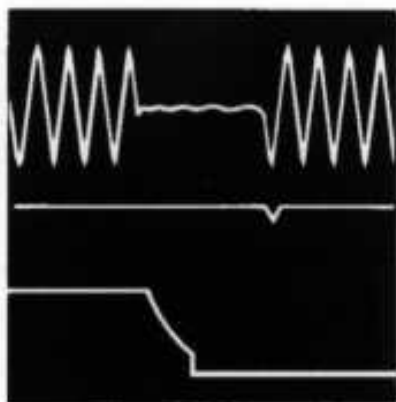

AC input  
nom -30%

DC via CVT

DC less CVT

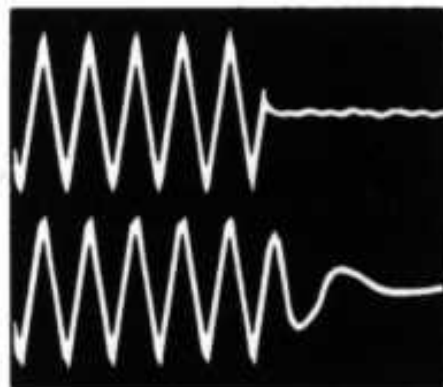


Input

Output


\*assumes nominal line voltage

Something for nothing: so long as at least 30% of the normal supply voltage is present the suitably selected CVT can provide adequate power for your critical load.

### Common mode noise attenuation


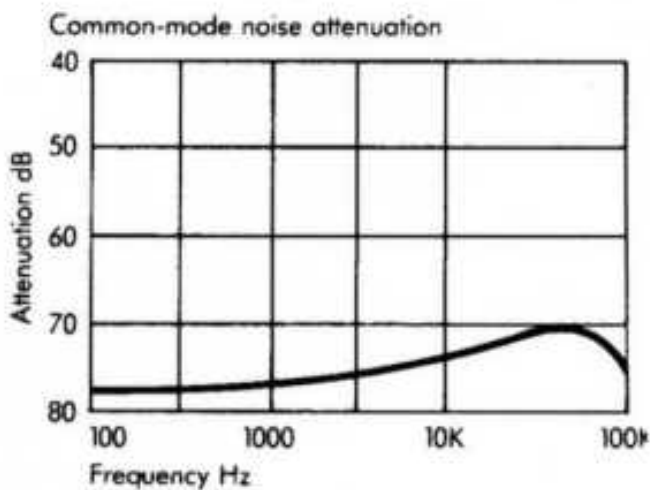


### Series mode noise attenuation

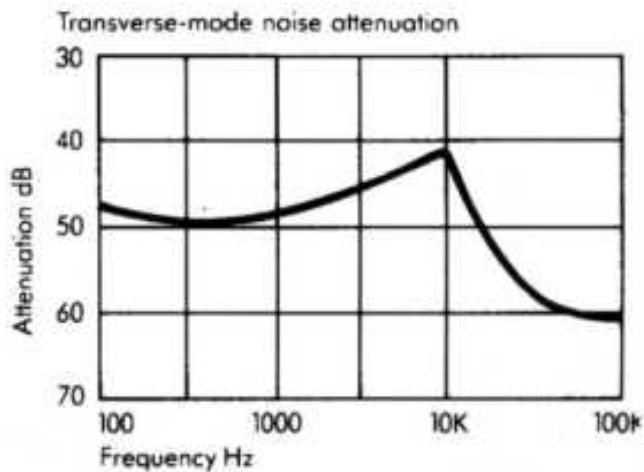

>


### Regulation

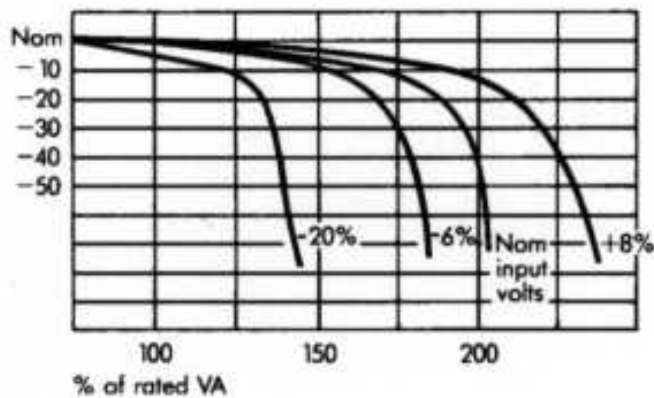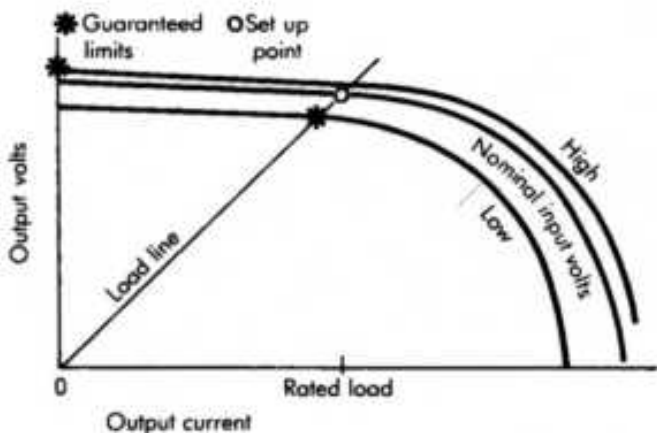

Output within 5% for zero to full load


Outstanding output regulation at low loads or high input voltages

### Regulation outside of specification

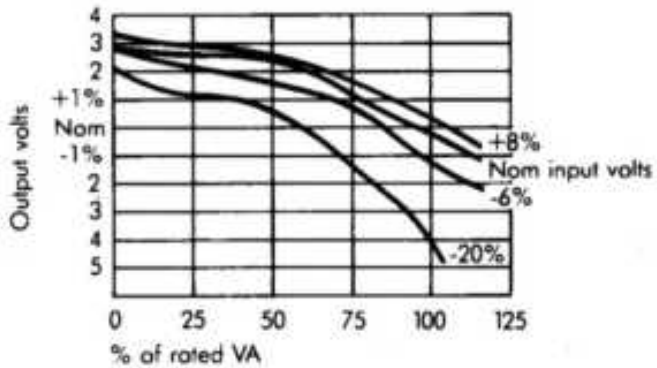


Output within 8% for zero to full load and nominal input +/-20%

### Stabilisation

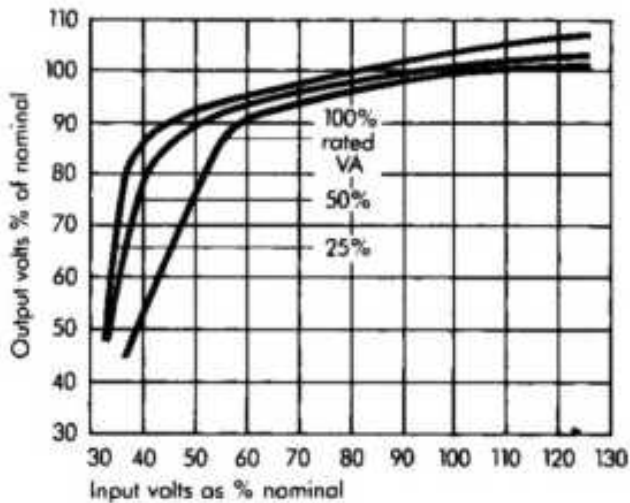

Output within 3% for nominal input +/-15% Even wider input swings at below nominal loads

### Power Factor

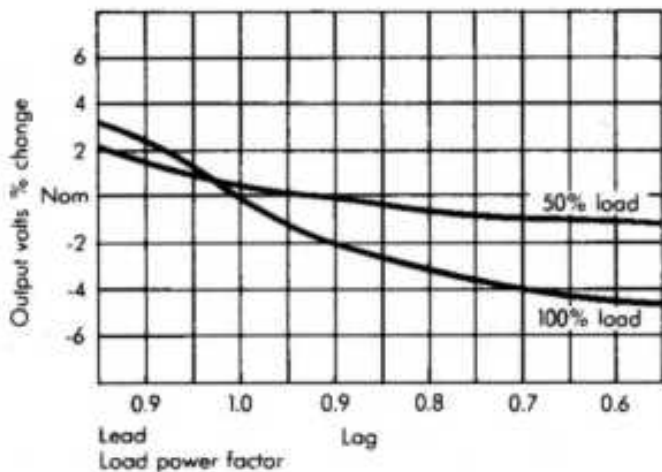


All units present a power factor to the supply which varies with output load.

The CVT will drive a wide range of power factor loads (+/-0.75)


Small changes in the output voltage will be found in comparison to the setting with a resistive load.

### Output changes with frequency of input

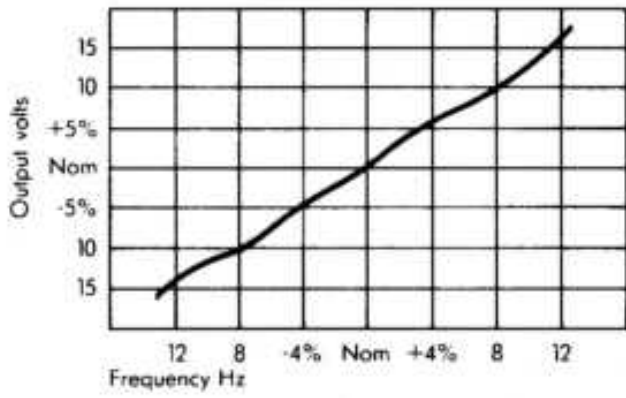

A 1% frequency change produces a 1.5% change in output voltage

### Phase shift

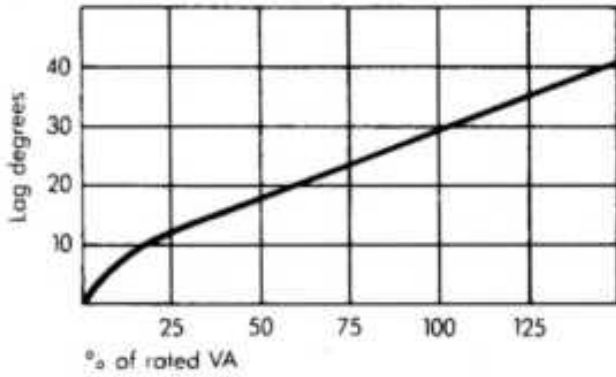

There is a small phase shift across the CVT varying with load

## hb003 CVT background data

### Introduction


The effect was discovered during the 1930's in the USA by Joseph Sola a German born engineer.

The industrial use of ferroresonant transformers goes back to early 1940's. Through the last 5 decades a series of applications has been found for products based on the technique. In each case the CVT has some feature which made it the most reliable and cost effective solution to the problem. These characteristics continue to make the CVT one of the most cost effective ac power conditioners available.

Although different manufacturers use varying techniques the Advance CVT is normally based on a single transformer rather than an arrangement of transformer and separate filters. This lends itself to one of the most important aspects of the CVT its inherent reliability. Ignoring nuts bolts and other small components the unit consists of 3 or 4 windings and a special capacitor. With good manufacturing technique only the capacitor fails and a considerable time and effort goes into making this as unlikely as is practical.

The second major characteristics that the CVT is almost indestructible. It can be completely and continuously short circuited in use either at switch—on or from full load and the unit will be unaffected.

As can be seen from the output curve the CVT output characteristic is such that the published specification may be set at an arbitrary distance from the knee. This is important when comparing product from different sources. In situations where it is correctly installed the CVT is unaffected by low input voltage but will present a low impedance to very high voltage surges ensuring that in-line fusing or circuit breakers are opened before any damage occurs.

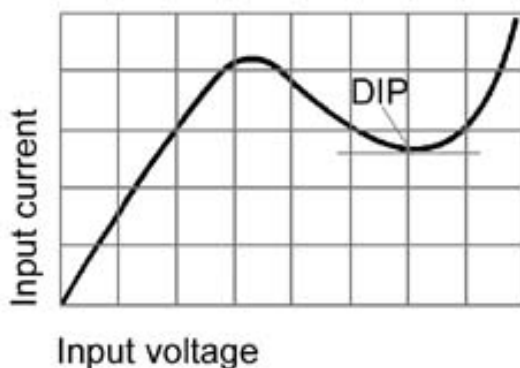

The graph of input current with voltage at fixed load shows this. It also indicates the normal operating 'dip' point. This means that the unit is self protecting to its supply and the critical load connected to it. The CVT provides the most effective buffer available to near—direct lightning strikes on power lines. The CVT also has the ability to provide usable output from low lines when operated below nominal power rating.

The third characteristic which makes the CVT suitable for more recent applications with computers is that there is limited energy storage in the resonating circuit. This means that the CVT is able to 'fill-in' small gaps in the power waveform (up to about 10 mS—half a cycle in a normal situation).

The output voltage waveform will not be a perfect sinewave but certainly one that will satisfactorily drive modern computer based equipment. This waveform remains the same even if the input voltage is very severely non-sinusoidal.



There is a limit to the dynamic range afforded by most designs but all CVT's exhibit the ability to provide a stable output voltage curve from a varying source. Although usually specified over a  $\pm 15\%$  range the CVT does not just 'stop' outside this voltage range.

This is practically limited to a  $\pm 25\%$  input swing for a usable output unless very special design precautions are taken. This voltage stabilisation is a continuous operation on a cycle to cycle basis. Power supplies in modern computers will accommodate variations slightly larger than the planned  $\pm 6\%$  of most electricity supplies so it is usually straightforward to get the power supply input inside the necessary band using a CVT.

Another major feature of the CVT is that it inherently absorbs high energy voltage spikes on the input. In addition it is practical with careful constructional techniques to provide an effective barrier against lower energy 'fast' spikes which

cause data corruption in computers and computer-based equipment.

On the negative side the CVT is a large and heavy transformer with operating efficiencies around 90% at full load. It has a substantial magnetic field and also produces a 50 or 60 Hz 'hum' dependent on unit size. The CVT is also frequency sensitive and will normally work at either 50 or 60 Hz.

We feel these features are more than offset by the knowledge that a properly selected and installed unit will usually cure mains problems on sensitive equipment. There is still a limited number of applications for specially wound CVT's with output waveforms which are essentially 'square' rather than sinusoidal for use in simple power supplies or heating/lighting arrangements.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)




# hb006CVT how does it work?

## Introduction

AC stabilisation can be achieved using a simple magnetic device which has no moving parts.

This is a process of producing a constant ac voltage from a varying ac voltage supply and involves the use of saturable reactors. The latter may be incorporated in a special transformer magnetic saturation being produced in a part of the magnetic circuit.

The winding arrangement and construction of one such constant voltage transformer is shown in the diagram:

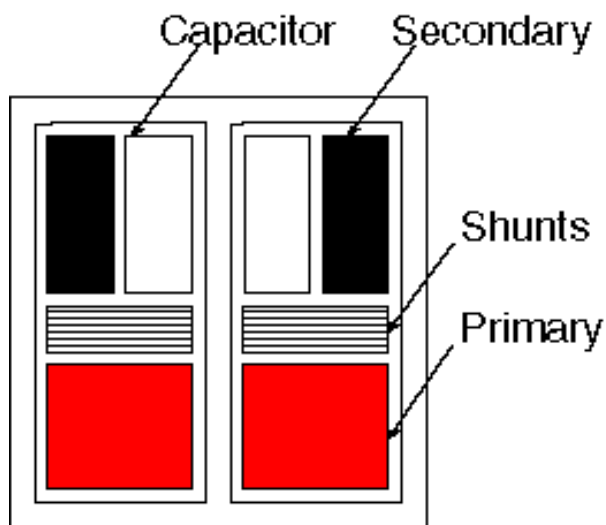


The core is a three-limbed shell with a magnetic leakage path dividing the winding space. On the upper winding space is the primary and a compensating winding while the lower winding space carries the secondary which has a capacitor connected across it. An increasing voltage applied to the primary produces an increasing flux in the main magnetic circuit and the secondary voltage increases proportionally to this voltage. The increasing flux produces an increase in the leakage reactance of the secondary and this approaches a value which resonates with the capacitor connected across it. As the condition of resonance is reached the secondary current rises rapidly saturating the lower portions of the magnetic circuit. The flux due to the primary is diverted through the magnetic shunt and further increases in primary voltage produces little change in the secondary emf. It increases very slowly and this is offset by the emf induced in the compensating winding on the upper portion of the core which is connected in series opposition to the secondary winding.

Thus once the secondary is brought to resonance the output voltage from the secondary and compensating windings is constant and it is under these conditions that the transformer is used.

The advantage of this form of stabilisation is that it can be applied to the heater supplies in addition to any HT supplies derived from it. Owing to the non-sinusoidal waveform however readings taken with the usual rectifier-type meters are subject to error.

The compensating winding produces a small voltage which is used to 'buck' the output voltage.

To produce a sinusoidal waveform a further winding is added which is coupled via a magnetic gap. This extra 'neutralising' winding can be arranged to provide a suitable amount of 3rd and 5th harmonics which when summed with the output 'square' wave above results in a sinewave.

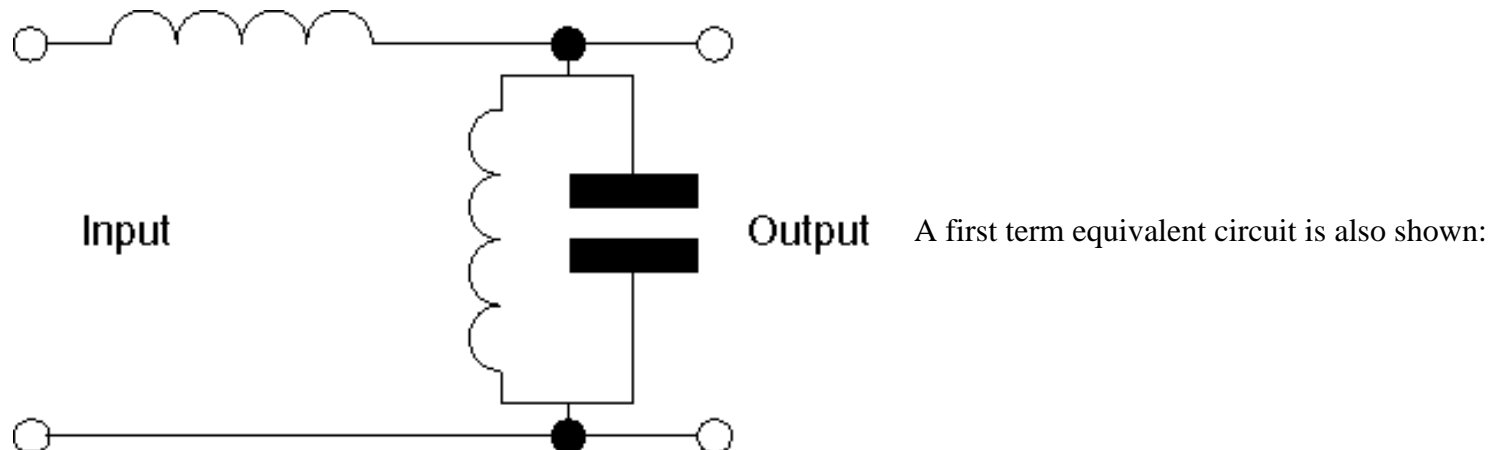

A first term equivalent circuit is also shown:



## hb009 CVT gives lightning protection

### Introduction

When lightning strikes enormous amounts of energy are dissipated. If the strike is in any way direct or near direct then most substances hit will be locally vapourised. Electrical distribution systems have special isolating devices to restrict the effects of lightning strikes on overhead wires. However overhead lines can pick up serious transients which will destroy sensitive electronics if the `spike' gets all the way into the equipment.

### Lightning

A typical lightning strike produces a waveshape which has a front edge of about  $1.2\mu\text{S}$  and after  $50\mu\text{S}$  the voltage will have dropped to half its peak value. Special test equipment is available which generates a  $8/20\mu\text{S}$  waveform which represents the lightning effect if the voltage is  $6\text{kV}$  and the source impedance less than  $2\text{ ohms}$ . A further popular test is based on a  $10/350$  shape which is used in telecoms applications.

It is not generally appreciated that office and domestic electrical distribution wiring will normally `flash over' at about  $6\text{kV}$  which limits the voltage expectation from local lightning strikes.

A typical `strike' may carry about  $200\,000$  Amps which when applied to an earthed conductor will cause a huge rise in the local earth potential. This effect can cause quite large amounts of energy to be carried along local earth wiring. Particular attention needs to be given to this problem. See [ICT wiring and considerations](#).

### Bullet proof protection

Advance CVTs especially designed for computer protection provide one of the most effective barriers against lightning damage. The CVT has a magnetic circuit which becomes a very low impedance when fed with high voltage.

If the unit is correctly installed with a protecting fuse or circuit breaker then the CVT will open the protection before damaging energy gets to the electronic equipment being protected.

This means that the computer or other equipment may be turned off inadvertently but it will be protected from the resulting distributed energy from the lightning strike. Such energy spikes are relatively common.

The only user action required is to replace the fuse or reset the circuit breaker and continue using the equipment.

If the strike is of sufficient energy to damage the incoming distribution wiring because of a direct strike then anything may happen.

This is extremely unusual.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## **hb010 Polychlorinated biphenyl (PCB) in CVT capacitors**

We are still servicing old CVTs made as early as 1943. Some of our suppliers have historically used PCB in the electrolyte of high voltage capacitors. These capacitors were incorporated in the manufacture of constant voltage transformers for a period during the 1960's and 70's. Non-PCB capacitors were introduced in the period 1972-75. Advance/Gould transformer model numbers changed when the units ceased using PCBs in capacitors. Specifically:

### **CV prefix became ECV**

### **CVN became ECVN**

some CVN models later became TCVN and all of these are safe. The 'E' signifies 'ecological' and means that no further checks are required.

1 CVT's labelled Advance in our current red/antelope colours definitely use non-PCB capacitors.

2 CVT's labelled Gould probably do not contain PCB in the capacitors.

3 CVT's labelled Advance and coloured black grey or silver may contain PCB in the capacitors.

If a unit in use is reported by model and serial number to Advance Electronics we can advise on the likely capacitor type.

We offer to service any suspect CVT capacitors at cost and properly dispose of the offending component.

Please note that most newer capacitors are actually marked 'No-PCBs' or 'Non-PCB'.

We have never used PCB in the actual transformer only in capacitor electrolyte.

Recent medical work suggests that PCB may be a carcinogen.

### **PCBs in capacitors used in CVT's prior to 1972**

A single capacitor may be disposed of as part of 1 cubic metre of bland rubbish having carefully wrapped the capacitor to avoid contamination during handling.

Significant quantities should be disposed of via :

**Capacitor Services Limited 24 Bridge Road Cove Farnborough Hants GU14 0HP**

**Telephone 01252-521911**

The handbook sheet hb011 health and safety data is copied from the EEC directive on PCBs.

---

UK: 01978 821 000      Tel: +44 1978 821000      © [AEL Group](#)

## **hb011 PCB Health and Safety data**

POLYCHLORINATED BIPHENYLS (PCBs) were used as a liquid impregnant in power and lighting capacitors during the period 1950 - 1980 under such trade names as AROCLOR ASKAREL BICLOR CLOPHEN DUCONOL PYROCLOR.

It is now known that PCBs are NON-BIODEGRADABLE are stored by body tissue and build up in the FOOD CHAIN give off TOXIC FUMES when operated at HIGH TEMPERATURES and increase the risk of cancer in animals and humans under these circumstances. There is strong evidence to show that PCBs attack welded metal seams and so produce a leak without any external influence thus necessitating early removal action as no practical drainage techniques are available.

This major health hazard is now under review by an EEC committee and all knowledgeable Authorities are recommending early attention to the problems of identification and approved disposal of this substance.

### **HAZARDS**

PCBs give off FUMES and VAPOURS above 55° C and most capacitors operate at this level. Strict precautions must be taken to prevent the INHALATION of these under conditions of container LEAKAGE and FIRE and any such exposure must be reported to Health and Safety Officials concerned. Skin and eye CONTACT must be avoided at all costs and under such circumstances copious IRRIGATION with EYEWASH or WATER becomes an immediate necessity followed by urgent MEDICAL ATTENTION. The irrigation fluid now becomes a hazard and must be CONTAINED. All TOOLS and CONTAINERS and MATERIALS which have been exposed to the FUME or LIQUID versions of PCBs must be SEGREGATED to avoid any CROSS CONTAMINATION. INHALATION INGESTION OPEN WOUND and SKIN ABRASION contact with PCBs is a medical EMERGENCY.

### **PRECAUTIONS**

Avoid all DIRECT CONTACT with the body and ensure that an IMPERVIOUS barrier is protecting the skin being particularly wary of the presence of CUTS and ABRASIONS. Never use clothing made of an absorbent material at the contact layer. All rubbers and most plastics are unsuitable for PCBs contact. POLYTHENE or similar material affords the best protection when used as GLOVES OVERSHOES HATS OVERALLS ETC. GOGGLES should be of a CHEMICAL grade. The possibility of EXPOSURE to FUMES and VAPOURS necessitate the use of SELF CONTAINED BREATHING APPARATUS. DO NOT SMOKE in the presence of PCBs. Do not dispose of neat or suspended PCBs in Drains Sewers Streams Effluent courses or any normal Waste Channels. Affix a prominent LABEL to all equipment which contains PCBs and initiate a formal COLLECTION and DISPOSAL PROGRAMME.

### **EMERGENCIES**

CASUALTIES must be moved to FRESH AIR kept WARM at rest with OXYGEN if necessary and have contaminated clothing removed if possible. Urgent evacuation to hospital under medical supervision is necessary. CONTAMINATED CLOTHING must be removed as soon as possible to a suitable CONTAINER marked `PCB`. CONTAMINATED SKIN must be thoroughly cleaned with soap and water in a PCBs CONTAINER. INGESTION OF PCBs and any SKIN or CHEST or THROAT IRRITATION must be treated as a MEDICAL EMERGENCY. SPILLAGE must be absorbed with SAND ASH SAWDUST etc. and collected in a PCBs CONTAINER. All WETTED areas must be mopped using absorbent material soaked in PERCHLORETHYLENE or proprietary solvent such as GENKLENE and then collected in the PCBs CONTAINER.

### **PROTECTIVE CLOTHING**

Pocketless Terylene Boiler Suit with elasticated waist ankle and wrist grips. Chemical grade goggles. Heavy duty Polythene Gauntlet gloves with thin Polythene disposable gloves inside the gauntlet and boiler suit sleeves. Protective Overshoes fitted inside the boiler suit leg bottoms. Self-contained Breathing Apparatus. Impervious overall.

### **ACTIONS**

Identify all Capacitors which are suspect of containing PCBs and obtain a COMPETENT VERIFICATION of the impregnant used therein. LABEL as PCBs all Capacitors which are verified as such and institute a removal and replacement programme of work following a competent understanding of the activity involved. All REMOVAL ACTIVITY must give priority to the prevention of leakage from an undamaged Capacitor and the minimising of contamination from a leaking CAPACITOR by way of fixing clamps and terminals. All PCB CAPACITOR UNITS should be placed in a SEALED STEEL CONTAINER for subsequent transportation purposes. MOP UP all SPILLAGE and WETTED AREAS placing all agents and protective garments in the PCBs CONTAINER including washing solutions. Consider the need to replace cabinets and switchgear which may have been significantly contaminated with PCBs.

**DO NOT SOLICIT INCOMPETENT JUDGEMENT on the suspect Capacitors.**

**DO NOT WAIT for the LEAKAGE to occur and make your Staff aware of the problems NOW.**

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb017generators with CVTs

Sophisticated computer systems sometimes use diesel engine driven generators for backup in case of mains failure.

Where our CVT's are used for power conditioning in the normal mains mode it is desirable to take advantage of the CVT performance when using the generator.

These notes provide some guidance on the potential problems which can be met together with solutions.

### Neutral

Some generators do not refer the low side of the output to earth. This **MUST** be tied down to avoid damage to any of our larger catalogue units which have double primary shields.

Care must also be taken that the generator neutral is not connected to the CVT output low.

### Frequency

All ferroresonant devices are frequency sensitive.

The generator must run close to 50 Hz for the unit to operate correctly.

Unfortunately the speed/output voltage curve for the generator goes the same way as the CVT so speed should be adjusted at actual running load.

We publish a curve for the effect of frequency variation in our CVT Handbook.

Short term off-frequency operation will not damage the CVT.

### Phase

The output from the CVT will be out of phase with the input in cases where the generator supplies other equipment directly some care is needed if a phase sensitive

triac firing circuit is installed.

### Safety

Unless phasing circuits are fitted all circuits should use 'break before make' contactors and enforced supply separation.

Some thought needs to be given to the Regulations regarding out of phase supplies in the same area.

## hb022 Earthing power conditioners - 4 options

The earthing connections for conditioners installed to isolate noise are very important.

The unit is designed to isolate the load from the building earth as well as to provide voltage stabilisation and noise attenuation.

The earth on the protected load may be connected to the safety earth but it must be realised that noise spikes on the safety earth may cause problems.

This applies to so-called 'clean' or 'dedicated' earths run from the main building power distribution box.

Ideal installations have the input of the conditioner protected by the safety earth and a separate clean earth provided for the critical load.

This can be achieved by an earth rod, water pipe (when suitably tested), or structure in tall buildings.

A 'clean' earth may be made by employing any of the following:

### Earth rod

Most installations can be earthed by driving a 10 mm x 2.5 m long earth rod within 30 m of the critical load.

This rod is then connected using at least the same size wire as the feeder circuit.

### Water pipe

A water pipe can be used if the resistance to earth is less than 6 Ohms.

Make certain by testing that the water pipe is not isolated by plastic connections, especially where it leaves the building.

### Building structures

When the installation is in a multistorey building it will be necessary to connect to the structural steel for the clean earth.

Choose a point that is close to the conditioner and bolt a wire to the structure. Connections to the structure are usually better than running a wire to the basement.

## Earth usage

In those cases where the load is partially protected (some peripherals unprotected by the conditioner) we recommend that the low or pseudo neutral side of the conditioner output is connected to the clean earth to avoid voltages appearing between the floating output of the double wound CVT and the unprotected peripheral.



Further attention should be given to ensure that earth connections are 'star-wired' to the clean earth.

Local permanent wiring regulations should always be observed.


The four major options are as follows:

	1 the output of the conditioner is floating with the safety earth wired through. Advance plug/socket units are like this. Unit fails normal earth loop impedance testing but is safe to BS 3535. If one output is fault connected to earth the other becomes hazardous. The conditioner will work OK. If both outputs are earthed the unit will close down to a safe condition. Note that some poorly designed SMPS are sensitive to floating neutrals.
--	---






input



clean  
output



clean

2 hardwired using separate clean earth. This gives good overall noise performance. Clean earth must test out properly and be isolated from safety earth. Clean earth should be labelled in UK to 514-7.

3 as 2 but establishment of quasi neutral. Output high is now potentially hazardous and should be connected via an RCCD if feeding sockets. Common mode noise may be better than 2 above in some situations. For first time installations this option gives the most straightforward solution. The conditioner operates like a new distribution transformer.

4 safety earth wired through quasi neutral. Common mode attenuation poorer. Installation should use RCCD with sockets.

The output is high-and-low not live-and-neutral so earthing the low output terminal is entirely compatible with the Regulations.

## **hb025 Using CVT's outside published specification**

All Advance catalogue CVTs are supplied and guaranteed to a

published specification. In general the CVT is specified to industry recognised norms and can be operated well outside its described performance specification. This note describes where liberties may be taken and should be read in conjunction with our GT generic specification which gives curves for many situations. This very robust product is particularly suitable for the unpredictable electrical mains supply in third world countries. Our CVTs are still the most reliable and effective mains protection for such applications.

### **High input voltage**

if the CVT is operated with the correct input fuse or circuit breaker it should work OK until the protection opens at about 150% of the nominal input voltage rating.

The output voltage will rise with increasing input at about 20% of the change - i.e. if the input goes up 5% the output will go up about 1%.

### **Low input voltage**

the output voltage will sag as the input voltage falls.

To operate under expected very low input voltage select a larger unit than normally required. Under loading the unit will provide significantly improved results. Most units will provide usable power down to 30% of the rated input voltage.

### **Non-sinusoidal input voltage**

If it is the correct frequency and alternating the CVT will operate.

A THD up to 25% or even a square wave is NO problem for short term durations.

### **Overloading**

The CVT may deliver up to 50% more power than specified this is very dependant on actual input voltage.

After this the unit will self protect by reducing the output voltage progressively until it reaches nearly zero. The unit can be operated into a short circuit indefinitely. Electric motors take large currents at switch on. If the CVT will start the motor it is big enough.

### **Power factor loads**

Inductive loads depress output voltages and can usually be corrected by adding capacitors.

Capacitive loads have the opposite effect. If you can tell us about the load we can usually advise how to drive it.

### **Switching loads**

Ordinary

switched mode power supplies are particularly suitable for use with our CVTs. Care must be taken with units with self adjusting input voltage arrangements. Some dimmer circuits or phase controlled circuits can cause problems.

### **Wrong frequency**

1 or 2 Hz off the correct frequency will produce low output volts for low frequency and vice versa.

50 Hz units will function at 52 Hz but will eventually fail if operated at 60 Hz.

## **Low temperature**

Down to -25 °C is usually no problem after that the capacitor bank becomes the limiting factor.

## **High temperature**

For short term excursions of ambient temperature up to 70 °C the only damage is to the life of the capacitor bank.

For every 5 °C above 40 °C expect the life to be halved from the calculated 200 000 hours MTBF.

## **High humidity**

If the unit is stored at 100% RH it will probably require drying before starting up.

The unit will operate at 99% RH without problems.

## **Failed capacitor**

If the unit has several capacitors and one fails the unit may still provide reduced power.

Shorted capacitors will stop operation but open circuit failures can be tolerated. Problems will occur at switch on if the unit is operated at high input voltage and light loads when a capacitor has failed. If the unit makes a 'humping' or 'motor-boating' noise it should be turned off and on again. Failed capacitors should be replaced as soon as possible.

## **Damaged casework**

We recommend that a thorough visual examination be made by a competent person prior to switch on.

Don't connect a critical load without prior testing. Light bulbs and fan heaters make excellent test gear in remote locations. So long as all the wiring and insulation seems intact and the situation demands it we suggest you try it.

## **Other problems**

Please ask for technical assistance via our sales office.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb026 Power conditioner comparison AIT vs GT differences

CHARACTERISTICS	GT series	AIT series	Notes
Smallest in catalogue	8VA	125VA	
Largest single phase in catalogue	15kVA	7kVA	larger specials available
Largest single phase available	20kVA	100kVA	
Largest three phase in catalogue	50kVA	250kVA	
Largest three phase available	50kVA	400kVA	
Noise rejection	broadband for common & transient modes	excellent common mode	
Lightning protection	good if installed correctly pulls input fuse to protect system against very high energy pulse	excellent common mode noise rejection	
Voltages available	2 to 20 kVac	55-0-55 to 680 Vac	
Voltage stabilisation	5:1 or 15:1 or better	none	
Output regulation	3-5%	<2%	
Waveform re-shaping	THD < 5% for any input shape	none	
Galvanic isolation	yes	yes	
Creepage & clearance	usually > 15 mm	> 6 mm	
Typical efficiency	about 90%	about 97%	
Size & weight	~15kg/kVA	much lighter than GT series	
Audible noise	50 dbA for 5 kVA	virtually none	
MTBF	> 200 000 hrs	> 200 000 hrs	
Hold up with switched mode PS	retained even @ low line voltage	same as mains supply	
Frequency	50 or 60 Hz or both	50/60Hz all units	
APPLICATIONS	GT series	AIT series	
Networked computers	where voltage stabilisation is required	ideal	
File servers	where voltage stabilisation is required	ideal	
EPoS systems	for robust protection	ideal	
3 phase STAR loads	ideal	ideal	

3 phase DELTA loads	can be done with complex filter ONLY	ideal	
UPS up front	care with charger waveform	ideal	
UPS bypass	care with phasing	ideal	
UPS output voltage step up/down	GT can be difficult to drive	ideal	
Generators	care with frequency stability	ideal	
Phase controlled loads	care with current waveform	ideal	

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb027 Power protection in the third world

## Background

Those of us who are used to the high standard of electricity utility supplies in the industrialised world sometimes forget the problems faced by users of high tech equipment in the third world. This page describes a strategy for planning electrical power protection in a small business or professional office application. These notes may also be helpful to householders facing regular damage to electrical equipment - even just ordinary light bulbs.

## The problems

These fall into different categories the critical load must be protected from one or more of the following:

out of tolerance voltages

(sags surges and brownouts)

spikes on the line

and/or keep working when

out of tolerance voltages occur

mains supply fails.

Most electrical equipment is able to function normally if the voltage varies by less than  $\pm 10\%$ .

Modern equipment is also usually able to operate satisfactorily in an environment where small noise spikes (less than 100V) arrive down the line.

However the data handled in modern digital equipment is sometimes corrupted by severe spikes.

Some of the equipment may be so critical that it needs protection from both noise spikes and power failure.

Other equipment may need protection from brownouts and/or very high voltages.

## Planning a solution

A thorough survey of the various equipment loads around the business or office location should be prepared.

Each equipment needs to be classified. For example - critical essential non-essential.

The actual load of each item needs to be expressed in watts.

It is often misleading to take electrical ratings from external labels on the equipment to be protected.

Fuse ratings can also be much higher than actual consumption and should only be used as a guide where no measuring equipment is available.

Separate lists need to be made for the various loads showing which ones are critical and others which just need protection.

Consideration should be given to the possible need for a few lights to be supported when the mains fails so that critical equipment (keyboards!) can actually be seen.

Attention needs to be paid to the problems of separating the various electrical wiring circuits.

It also makes sense to adopt some procedure for ensuring that the load is not used on the wrong supply.

Typical approaches include labelling or the use of different style plugs and sockets.

For some systems permanent wiring is sometimes an alternate solution.

For more information or assistance in preparing a strategy please ask our sales office.

### Typical strategy

<b>Load</b>	<b>Watts</b>	<b>Protection equipment</b>
light bulbs TV video freezer hi-fi	2600 300 75 450 200 3625	Advance power monitor disconnects the load when voltage goes outside predetermined limits
air conditioner	3000	tapping voltage stabiliser to maintain or APM as above
digital GSM phone	100	Advance low impedance power conditioner prevents spikes getting to the phone memory
fax machine for incoming orders	150	uninterruptible power supply brownout protection and batteries when mains fails - specify backup time
personal computer with data which is essential	450	UPS noise spike protection brown out protection + must be protected and batteries when mains fails - specify backup time
laser printer modem scanner	1200 40 120	Advance GT power conditioner noise spike protection brown out protection from mains supply these un-essential items go off when power fails

UK: 01978 821 000

Tel: +44 1978 821000 © [AEL Group](#)

# hb028 Sizing conditioners for refrigerator compressors

## Background

Those of us who are used to the high standard of electricity utility supplies in the industrialised world sometimes forget the problems faced by users of high tech equipment in the third world.

This page describes how the World Health Organisation addresses the problems associated with protecting the compressor motors on refrigerators.

The data is extracted from the WHO document entitled 'Guideline for establishing or improving national regional and district vaccine stores.'

## Factors requiring consideration

The WHO presents data to assist in the selection of power protection equipment in section six of their recommendations:



**World Health Organization**  
**Geneva**

### 6. Power Factors

#### 6.1 Reliability

*The reliability of the electricity supply is a key issue when choosing refrigeration equipment. Where power cuts exceed 8 hours in 24 hours the use of ice-lined refrigerators and freezers is essential.*

#### 6.2 Standby generators

*No refrigeration equipment currently available has a holdover time greater than 2.5 days. Vaccine will be destroyed if there is an extended mains power failure unless there is an alternative source of power. It is essential to assess the risk of such failure. Failures may arise for many reasons. Examples include overloading of the power supply network; mechanical breakdown; lack of fuel or seasonal storms.*

*Replacing large quantities of damaged vaccine is expensive and extremely disruptive. It may not be possible to replace vaccines quickly because world stocks are limited. Emergency replacement from a finite world stock also disrupts the supply of vaccine to other countries.*

*All sites storing large quantities of vaccine should have a standby power supply. Often this is achieved most economically by locating the vaccine store in a hospital compound or on some other site which already has a standby generator. When this is not possible it may be necessary to install a generator to serve the vaccine store alone.*

##### 6.2.1 Generator sizing and selection

*The Product Information Sheets give advice on choosing and buying a generator and the EPI Equipment Performance Specifications provide detailed specifications. Wherever possible the final sizing of generators should be made the responsibility of the cold chain equipment supplier.*

##### 6.2.2 Generator control and operation

*Generators serving vaccine stores only should be fitted with automatic starting devices linked into the cold room or refrigerator/freezer alarm system. If the vaccine store is served by a compound generator this will generally be started by an automatic mains failure device. In such cases alarm-triggered start-up is not required.*

*All generators should be run at least once per week and should be regularly serviced to ensure that they remain operational. The fuel tank should be kept full at all times.*



### 6.2.3 Generator siting security and fire protection

*A generator should be sited so that it does not create a fire hazard. Typically it should be located in a separate building or weatherproof enclosure. The fuel tank should be isolated and should be surrounded by a low wall or an earth bank to prevent fuel spills from spreading. Both the generator and the fuel tank should be located in a secure compound to prevent theft. The fuel filler cap tank should be locked and the fuel line should be protected so that it cannot be tampered with. Fire extinguishers capable of extinguishing fuel oil engine and electrical fires should be fitted close to the generator and fuel tank.*

### 6.2.4 Assuring fuel supplies

*Fuel supply for the generator must be a priority allocation. A running log should be kept in order to monitor fuel consumption.*

### 6.3 Voltage stability

*In many countries severe voltage fluctuations occur in the mains power supply. Voltage fluctuations greater than 15% will damage compressor motors. The problem can be overcome by fitting each piece of refrigeration equipment with a voltage stabiliser. Some of the refrigerators and freezers in the Product Information Sheets are supplied with integral voltage stabilisers.*

*Voltage stabilisers for cold rooms should be specified by the cold room supplier. When a voltage stabiliser is ordered for a refrigerator or freezer the following information should be given to the supplier:*

☒ *Actual voltage fluctuations (recorded by an engineer or electrician)*

☒ *Nominal voltage*

☒ *Single or three phase supply*

☒ *Frequency (50 Hz or 60 Hz)*

☒ *Nominal power of compressor in watts*



*The nominal power of the stabiliser should be about five times greater than the nominal power of the compressor to allow for the starting load."*

We are grateful to the WHO for the opportunity to reproduce their recommendations.

# hb029 Safety data on CVT based power conditioners

## Scope

These notes apply to all ferroresonant transformers made by Advance Electronics Ltd. at Wrexham.

## Construction

The transformer consists of insulated copper wires wound onto an insulated former subsequently assembled onto steel laminations.

Advance power conditioners are double-wound transformers with tested secondary isolation from the mains. In addition high voltage capacitors are added into a resonant circuit configuration.

## Installation

Advance provides detail installation instructions for all models and care should be taken to use them.

It is practical to meet the fundamental safety needs and yet retain a high level of earth integrity with a little care at the planning and wiring stages.

## Hazards

### High voltage

The transformer must be correctly installed according to the requirements both of the latest edition of local wiring regulations and manufacturers recommendations.

Specifically proper in-line fusing or other suitable protection must be installed. Output voltages can be as high as 650 volts and suitable RCCD protection and proper insulated fittings must be used in accordance with the needs of the application. The internal capacitors may run at 660 volts ac and are lethal when operating. The capacitors are safe when the unit is switched off SO LONG AS THE 'CAPACITOR TO WINDING' CONNECTIONS are SOUND. Only authorised and trained personnel should attempt repair.

### Power

The unit is incapable of delivering more than 2 or 3 times its rated current in a failed mode and a maximum of less than 75% of its rated output voltage.

### Temperature

The steel stack of the unit may reach 60 °C in normal air and precautions must be taken when repairing or testing exposed units.

The exposed stack on small units does not reach an unsafe temperature but may feel quite warm to touch. All units should be well ventilated as power ratings assume natural air cooling.

### Chemicals

Once completed and all solvents have been burned off the transformer is chemically benign.

The capacitors contain paper insulation soaked in transformer oil which is relatively odourless and harmless to human skin. Although messy this oil is only found if a capacitor leaks through some internal electrical fault in the capacitor. If the capacitor is leaking the transformer is faulty and should be switched off. Historically PCB's have been used in the capacitors but Advance has not used any since about 1972.

## **Mass**

All the transformers have a high density and suitable precautions should be taken in respect of the size under consideration.

## **Noise**

Audible noise at 50 Hz is emitted at different intensities depending on unit size. Levels range 45 - 65 dBA. If other higher frequencies are present - checks should be made for potential faults.

## **Multi phase systems**

Advance power systems can be wired in several different configurations.

In cases where more than one 240 volt phase is to be connected into one enclosure attention must be given to external safety labelling. The wiring regulations demand that 415 volt warning labels be affixed in visually prominent positions after installation. Suitable labels are enclosed if appropriate and replacements are available on request from Advance at no charge to systems customers.

## **Self setting power supplies**

During recent months an application problem has arisen with some types of UPS.

The problem specifically relates to customer loads which have self-adjusting voltage power supplies. This type of power supply looks at the incoming mains and typically sets itself to either 115 or 230 Vac. If driven with any current limiting source such as a CVT or CVT based UPS the power supply sets itself to 115 V and then is promptly supplied with 230 V which usually means destruction of the customers' power supply.

Customers who have selected products with a load using this kind of SMPS should select a CVT which corresponds to the lower voltage input rating of the power supply or ensure that the CVT/UPS is switched on before the load. Most of the equipment we have seen with this type of 'world wide' power supply is small and rated below 1 kVA for razors and portable TV sets.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb036 Using CVTs with a UPS

## Introduction

Modern on-line Uninterruptible Power Supplies (UPS) give excellent performance when applied as expected by the designer.

Sometimes superior noise immunity or voltage variation handling is required. This is usually accommodated by adding a power conditioning product to the UPS. Such installations are attempting to provide a much higher protection than provided by the simple RF filters in the UPS which are designed to stop internal noise leaving the UPS.

## Potential pitfalls

The UPS was probably not designed with the expectation that it would be driven from something other than an ordinary mains supply. Some UPS have output circuitry which does not manage difficult loads very well. Once the user decides to add the two products together it becomes apparent that there are several different ways to connect up the critical load. These different approaches give rise to various problems which can cause problems to the unwary.

## Alternate scenarios

The UPS will normally have an automatic bypass if it is of the on-line type. We recommend that all such units should also be fitted with a maintenance bypass (either manual or automatic) for properly planned installations. The main problem is to assess whether or not the power conditioner should be put in front or behind the UPS. There also needs to be some consideration about how the bypass operates and whether or not power conditioning is available in either bypass mode.

## Considerations

It is not often realised that a UPS supplied in today's modern market place may have characteristics which are not properly described in the sales literature.

For example the UPS output power rating is usually quoted with a 'power factor'. The implication of this is that the unit may be rated at 1000 VA but is quite incapable of supplying 1000 watts.

An on-line UPS has to support the full rated load whilst the system is recharging it's batteries. This usually means that the unit requires considerably more input power than expected from the output rating.

The UPS may not have facilities to allow the bypass line to be connected to a different supply from the normal incoming mains.

The two major transformer based power conditioning technologies are 'ferro-resonant' or 'low impedance' types. Both also have internal inefficiencies and will require more power at the input when fully loaded than is available at the output.

The ferro-resonant types often based on constant voltage transformer (CVT) technology also have power factor considerations at both input and output.

The CVT is also less efficient than conventional transformers. However the CVT represents one of the most effective ways to solve noise and voltage problems when applying UPS products in tough working environments.

## Working solutions

UPS + low impedance conditioner ([AIT](#))

In this case the conditioner may be used in front of the UPS to protect it against mains borne spikes and common mode noise. Clearly if it protects the UPS then it will protect the load against the same mains borne problems. The AIT must be rated to provide enough power for the worst case input requirements of the UPS. These must be considered for an exhausted battery full load and worst case temperature conditions. In the absence of proper data use a rule that the AIT should have a rating which is at least 50% bigger than the UPS.

It is also possible to use the AIT after the UPS to provide galvanic isolation and/or protect the critical load against common mode noise generated by the UPS. The AIT will NOT provide any protection to the UPS input circuitry. With this connection attention must be given to the capacity of the UPS to drive the AIT. Typically the AIT wattage rating should be no larger than about 50% of the rated VA of the UPS.

### UPS + [CVT](#) power conditioner

There are huge benefits to feeding a UPS from a CVT based power conditioner. These include lightning protection better battery recharge times and a benign mains feed for the UPS. The mains becomes essentially clean and complements the battery back up features of the UPS. In this case however more problems are apparent.

The CVT is a resonant device which has unusual input characteristics. (See ds047) Consideration must be given to the fact that the input power factor of the CVT is affected by line voltage and load value. Some UPS units will not drive inductive loads at all. Others may struggle to cope with the varying power factor. Either way the UPS load rated at 1000VA with a 0.6 PF rating on the output can only drive a CVT which is considerably smaller than one designed to deliver 1000 watts. A useful rule is that the CVT should be considered to be 80% efficient and therefore the rating is:

UPS load rating VA \* PF \* 0.8

So a normal 1000VA UPS may only be adequate to drive a 480 watt CVT! For CVTs driving the input of the UPS the issue is entirely one of the worst case UPS needs. The rule above for the AIT can be used. Further attention should be given to the fact that the CVT may provide a clean sinewave into a resistive load but it may not provide the low distortion waveform required by some UPS chargers. This can cause the UPS to run it's batteries flat.

### Summary

The combination of a UPS and a power conditioner requires serious planning BEFORE buying equipment. If the two units have similar ratings they will probably not operate satisfactorily in any combination.

If one item is already installed it probably means that the only combination which will work is either a larger unit in front or a smaller unit after the existing one. This usually means the second unit is too small to drive the critical load!

Our engineers would be delighted to assist with any problems relating to a specific installation.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb039 Start up surges on (CVT's)

The switch on current surge for a CVT consists of two components. One of these is fixed at about 8 times running current for 5 - 10 mSec. Superimposed on this will be a 'spike' which will be dependent on where in the mains cycle the transformer was last turned off and where in the cycle it is turned back on. The spike will be less than 1 mSec and varies from zero to 25 times running current if the supply is very 'stiff'. The input surge current at switch on is not significantly affected by the output load condition. The surge current will be substantially proportional to applied line voltage. Our normal circuit breaker recommendation is to fit a 'Type 4 ' or 'Curve 66' unit which should function without nuisance tripping. Fuse earth loop impedance and cable size suggestions are shown.

### Fuse ratings

Fuses known as 'motor circuit fuse links' in BS 88 / IEC629 are ideal for CVT's. The GEC type 'T' H.R.C. are used in the table and European types should be the type called 'aM' or if available type 'gTr'. We suggest that installers use a wall-mounting switch fuse arrangement or 'red-spot' fittings. The table shows the MINIMUM fuse that can be used in normal installations, if using a breaker the choose the next size LARGER in your breaker range. Attention must be given to special cases where input voltage limits may go below the -20% figures used in the table. Cable sizes are also the minimum recommended by GEC for use with each fuse rating. The fuses will protect a PVC cable according to rule 433-2 for 'open conditions'. Earth loop impedance is for SAFETY considerations and does not reflect the needs of a clean earth. Protection against electric shock is provided by these fuses when correctly installed. Part numbers are based on GEC published data and some so-called direct equivalents may not be suitable. Discrimination must be proven under the requirements of the current edition of the local permanent wiring regulations BS 76711992 - it remains the responsibility of the installer to ensure that the supply is protected.

### Output fuses

All Advance CVT's have automatic overload characteristics. In normal situations the output current will limit at about 2 times rated current. The output voltage will collapse to near zero dependent on the fault impedance. It is impractical to provide a fuse that will remain intact for normal full load use and definitely open under fault conditions since the CVT does not and cannot supply enough energy. We therefore recommend no output fusing be used except where other high power conductors could become connected under fault conditions to the output circuit of the CVT or the fuse required is much smaller than the output capacity of the unit. If it is essential to protect the output we have had good success with [thermal circuit breakers](#).

### 115Vac systems

VA rating	Amps @88Vac	BS88 Fuse A	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms	VA rating	Amps @88Vac	BS88 Fuse	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms
100	1.5	5	5aM		1	13	5000	65	100M125	100aM	A4	16	0.45
200	2.7	10	10aM		1	7.7	6000	78	100M160	100aM	A4	16	0.45
250	3.4	10	10aM		1	4.4	7000	88	100M200	100aM	A4	25	0.45
300	3.9	13	13aM		1	4.4	8000	107	200M250	200aM	B2	35	0.19
400	5.0	13	13aM		1	4.4	10000	134	200M250	200aM	B2	35	0.19
450	5.7	13	13aM		1	4.4	12500	158	315M355		B3	50	0.11
650	8.7	13	13aM		1	4.4	15000	189	315M355		B3	50	0.11
1000	13	20M25	20aM	A1	1.5	3	20000	267	315M355		B3	50	0.11
1500	19	32M50	32aM	A2	4	1.8	25000	334	400M450		B4	70	0.096
2100	27	32M63	32aM	A2	6	1.8	33000	441	400M450		B4	70	0.096
3000	39	63M80	63aM	A3	6	0.86	50000	693	630M670		C2	95	0.054

4000	52	63M100	63aM	A3	10	0.86							
------	----	--------	------	----	----	------	--	--	--	--	--	--	--

## 230Vac systems

VA rating	Amps @192Vac	BS88 Fuse A	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms	VA rating	Amps @192Vac	BS88 Fuse	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms
100	0.7	3	3aM		1	13	5000	30	32M63	32aM	A2	6	1.8
200	1.3	5	5aM		1	13	6000	36	63M80	63aM	A3	6	0.86
250	1.6	5	5aM		1	13	7000	41	63M80	63aM	A3	6	0.86
300	1.8	5	5aM		1	13	8000	49	63M100	63aM	A3	10	0.86
400	2.3	10	10aM		1	7.7	10000	61	100M125	100aM	A4	16	0.45
450	2.6	10	10aM		1	7.7	12500	72	100M160	100aM	A4	16	0.45
650	4	10	10aM		1	7.7	15000	87	100M200	100aM	A4	25	0.45
1000	6	13	13aM		1	4.4	20000	123	200M250	200aM	B2	35	0.19
1500	9	13	13aM		1	4.4	25000	153	200M250	200aM	B2	35	0.19
2100	12	20M25	20aM	A1	1.5	3	33000	202	200M315	200aM	B2	35	0.19
3000	18	20M32	20aM	A1	2.5	3	50000	318	315M355		B3	50	0.11
4000	24	32M50	32aM	A2	4	1.8							

## 400Vac systems

VA rating	Amps @332Vac	BS88 Fuse	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms	VA rating	Amps @332Vac	BS88 Fuse	IEC269 Fuse	UK Holder	Cable sq mm	Earth loop Ohms
100	0.4	3A	3aM	-	1	13	5000	17	20M32	20aM	A1	2.5	3
200	0.7	3A	3aM	-	1	13	6000	21	32M50	32aM	A2	4	1.8
250	0.9	3A	3aM	-	1	13	7000	23	32M50	32aM	A2	4	1.8
300	1.0	3A	3aM	-	1	13	8000	28	32M63	32aM	A2	6	1.8
400	1.3	5A	5aM	-	1	13	10000	35	63M80	63aM	A3	6	0.86
450	1.5	5A	5aM	-	1	13	12500	42	63M100	63aM	A3	10	0.86
650	2.3	10A	10aM	-	1	7.7	15000	50	63M100	63aM	A3	10	0.86
1000	3.4	10A	10aM	-	1	7.7	20000	71	100M125	100aM	A4	16	0.45
1500	6.4	13A	13aM	-	1	4.4	25000	89	100M160	100aM	A4	25	0.45
2100	6.8	13A	13aM	-	1	4.4	33000	117	200M250	200aM	B2	35	0.19
3000	10	20M25	20aM	A1	1.5	3	50000	187	200M315	200aM	B2	35	0.19
4000	14	20M25	20aM	A1	1.5	3							

## Output protection using thermal breakers

Since the CVT is capable of developing a steady current when marginally overloaded and exhibiting an output voltage which is slightly lower than normal it is practical to protect the load wiring with a thermal breaker. The breaker should be chosen so that under all normal operating conditions it will not see it's rating. If a fault occurs causing excess current to flow then the breaker will eventually open - even if the overload is only 105-110% of the breaker rating. The breaker will open quite quickly in the event of a short circuit in the secondary load wiring.





## hb048 Maintenance of CVTs

### Routine maintenance

Routine checks should be made to ensure that the ventilation for the power conditioner is properly maintained.

The unit should be positioned in a well ventilated location as power ratings assume natural air cooling. Annual checks of capacitor integrity may be worthwhile once the unit is more than five years old.

### Preventative maintenance

Visual examination of capacitors on large units can often indicate a local fault through

leakage of oil - in this case replace the faulty part. To prolong usable life it can be beneficial to replace the capacitor bank every five years. Some larger power conditioners are fitted with fans to assist with cooling. Under normal circumstances the only preventative maintenance required is the cleaning of fans if fitted.

### Replacement of capacitors

We are occasionally asked to supply replacement capacitors for old CVT's.

Capacitors are subject to two characteristics which affect the use of these spare components in CVT's.

a value tolerance

b physical dimensions

a - changes in capacitance value will result in differences in the CVT output voltage.

In general terms we expect normal production tolerances in the value of a spare capacitor to make less than a 1% change to the original output voltage nominal setting. This situation can be improved when a coloured dot is noted on the failed capacitor and it's colour dot is defined at the time of ordering a spare. The output voltage variation expected with CVT's using a spare capacitor of the same colour dot will be less than 0.3%.

b - the physical dimensions of commercial capacitors change over extended periods of time. In general terms our capacitors will be of similar size or smaller. In case of any anticipated problem we recommend a factory repair for units up to 3 kVA. Care must be taken when handling high voltage capacitor installations. Replaced capacitors must have an adequate Vac rating for duty with high harmonic currents.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb054 CVTs approval to international standards

## Background

There is currently no international specification which relates directly to constant voltage transformers.

A draft specification exists for UPS products (BS EN50091-93) but this is unlikely to be more applicable to CVTs than current specifications.

## Existing approvals

The CIT range up to 1500VA has been approved to NEMKO NEK-EN 60742 and SEMKO 115X.

The Smartstab conditioners rated 100-1000VA have been designed to meet SEMKO 115X.

## Potential approvals

### UL

Some of the GT series were approved by UL but we have allowed this to lapse through lack of sales to interested parties.

We also used to have an insulation system approval but this has been allowed to lapse for the same reason.

We have no technical problems with meeting relevant UL specifications but the commercial cost of upkeep is uneconomic.

Customers who must have approval for their equipment may request that we design for the standard required.

When the equipment comes up for overall approval we provide constructional data to facilitate the approval process of our component.

Our customer remains responsible for the commercial upkeep of the approval as required.

### CSA

Generally as per UL.

### CE

We expect to comply with all the European Directives as and when applicable.

By getting certification to EN 60950 or EN 60742 we hope to have product safety acceptable for the USA and Canada as well as EEC member countries.

Current status on CE marking is covered on handbook sheet HB 53.

A generic Certificate of Conformance for CE requirements is available as HB 57.

### EMC

We are in the process of having sample catalogue units third-party tested and plan to use the self certification method for most OEM items.

Our product is particularly suitable for filtering out mains conducted noise on old equipment.

### Safety

We are in the process of having sample catalogue units third-party tested and plan to use the self certification method for most OEM items.

There are a number of transformer related specifications. There are also relevant specifications in the office equipment and information technology areas.

Where necessary we can review any one of our units to a particular specification.

We have supplied a number of different designs to meet various specifications as components and are happy to do this where customers need it.

### **Component Approvals**

We maintain a computer file of international specifications held by various components which we use.

This is integrated with our Bill of Materials software and can be used to print a list of approved items in any of our products.

A file of master copies of component approval certificates is maintained.

### **Feedback**

We would be pleased to review this document with any interested party.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb056 Special casework for 3-15kVA CVT's

### Introduction

Advance uses a range of special casework for CVT's from 3 to 15kVA.

Details of the various options are given to assist designers to specify particular requirements. The basic CVT based power conditioner is similar in each unit but variations are available for

optional output fusing


cable access

terminal arrangements

optional fan cooling



The table indicates overall sizes of special enclosure with all sides removable.

Baseplate fixing holes are the same as the catalogue unit described in ds051. The special cover is fitted so that it's centre is over the centre of the baseplate fixings.

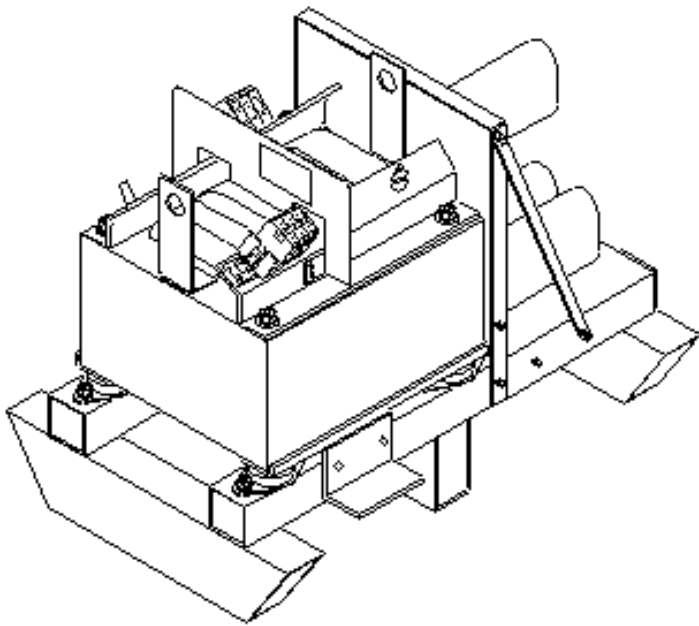


standard arrangement


same side terminal style

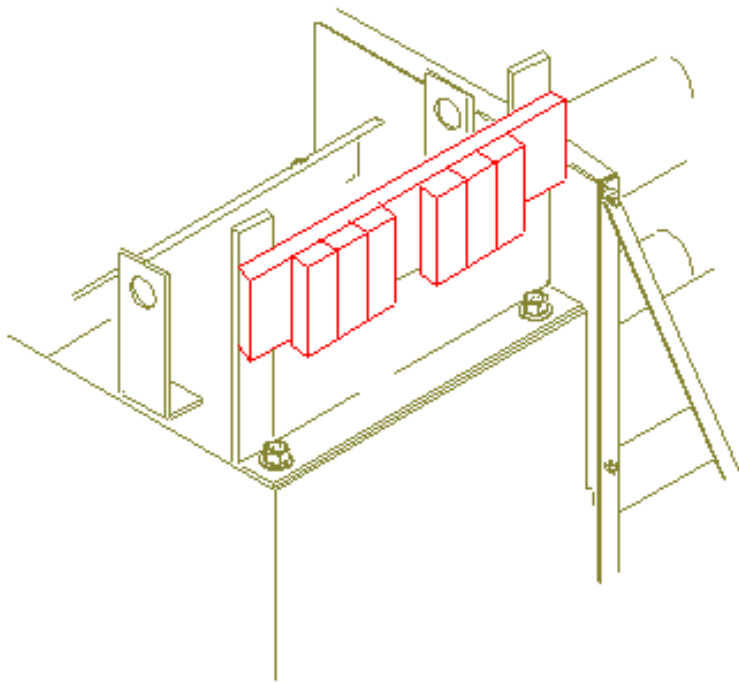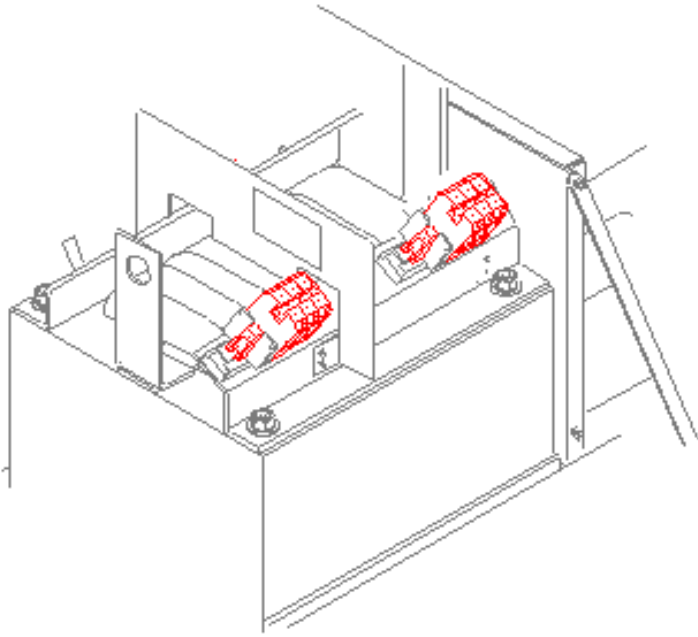


top entry terminal style

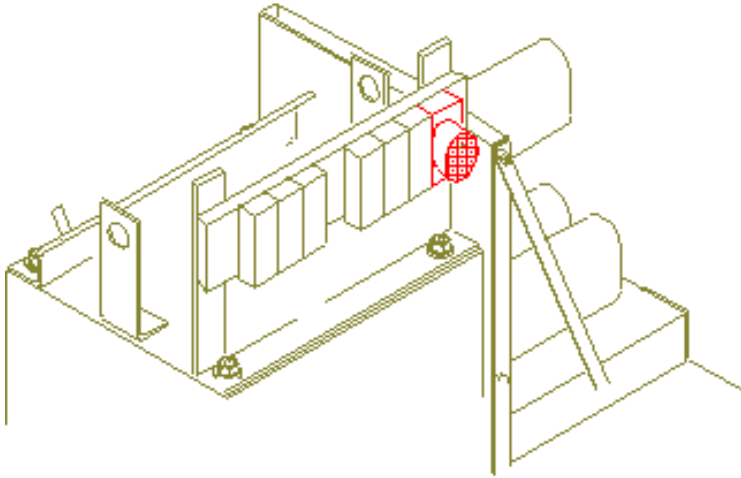



optional fuse holder location

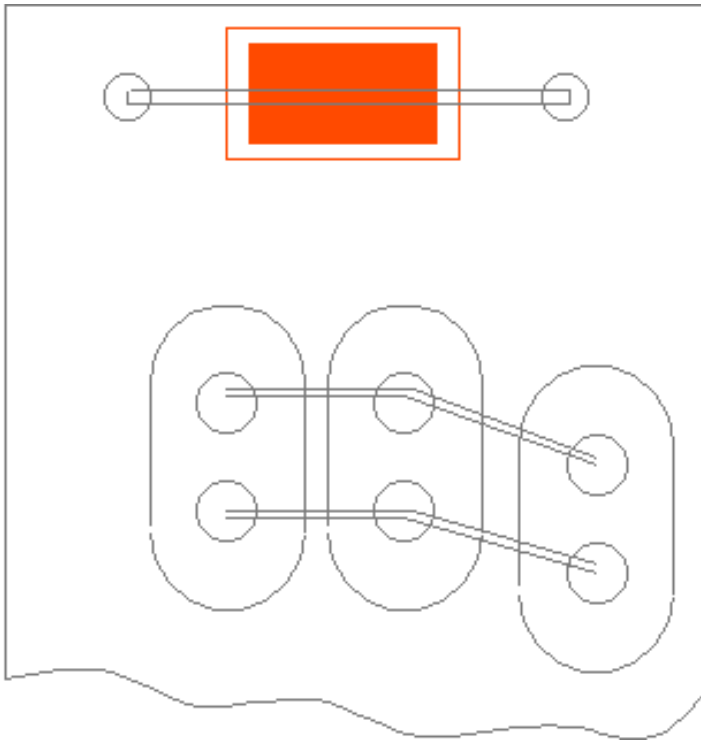

alternate fuse holder position

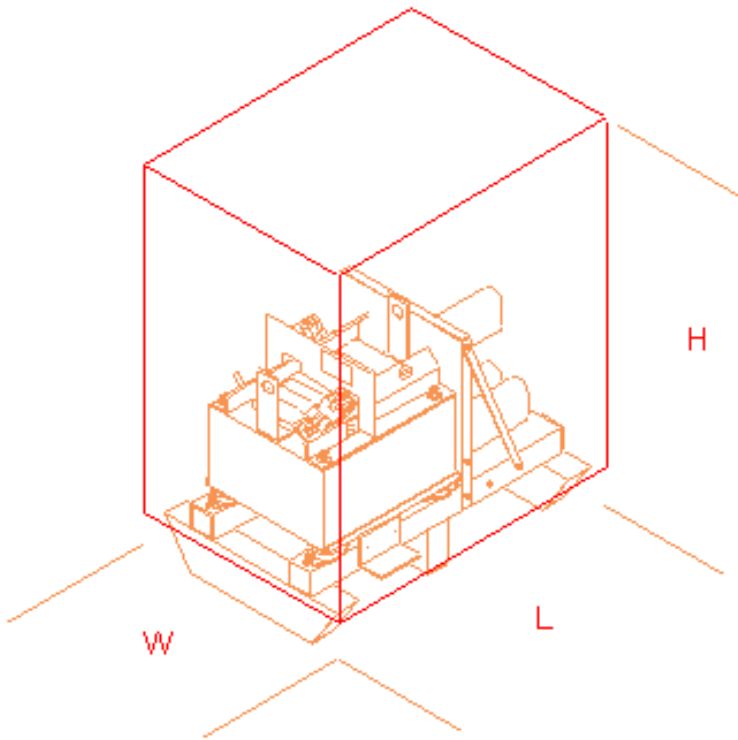

VA	dims in mm		Height with	
	Length	Width	bottom entry internal gland plates	top entry external gland plates
3000 4000 5000 6000 7000 8000 10000 12500 15000	725	505	575 575 680 680 680 950 950 1150 1150	680 680 950 950 950 1150 1150 1320 1320

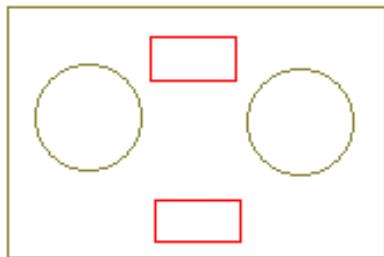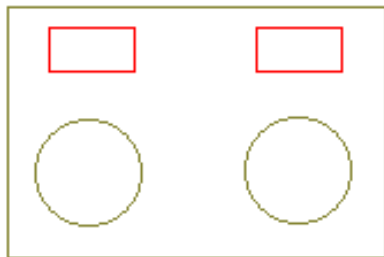

shows alternate gland plate styles for same side and opposite side cable entry

**hb057 CE Certificate - Declaration of Conformity**

Manufacturers name : Advance Electronics Ltd

Manufacturers address : [Wrexham](#)

Importers name/address : None


Type of equipment : Specialised transformer based products as shown in the table

Model prefix : See table

Serial no : Units manufactured after Jan 1st 1995 with the CE mark on the serial no label

Standard to which conformity is declared: see table

I the undersigned hereby declare that the equipment described conforms to all the relevant Directives.

Signature  Full name Michael John Briggs

Status: Director

Place: [Wrexham](#) UK

Date 4th January 1996

Directive	Low Voltage		EMC		
	73/23/EEC		89/336/EEC 91/263/EEC 92/31/EEC		
Product prefix	Standard	Status	Standard	Status	
AIT	EN60742	OK	EN6100-3-2 EN55022 class C	OK	
CIT					
CP CPE CQ SP SPE TP TPE					
ECV ECVN					
GT AGT			up to 5kVA OK		
GTI			EN50081 pt1 EN55022	in progress	
HDC			EN55014 EN60555-2 + -3 EN50082-1	OK	
STX (some)			ask factory/ check labels	EN6100-3-2 EN55022 class C	ask factory/ check labels
TCVN			OK		OK
TT			OK	n/a	n/a





## hb058 Selecting power conditioners

### Mains Monitoring

It is not essential to take on-site measurements but this process can be useful when the status of a site is unknown. Sometimes it is more economic to just experiment with a known good filter such as a CVT.

### We offer a loan scheme to potential and existing customers.

Advance can also provide ac mains monitors for checking of local mains supplies. Our monitors check the incoming supply against various voltage and noise thresholds which are adjustable by the user. Some other environment data can also be recorded such as the temperature. Results are normally printed out but can be RS232 linked via a modem to a remote site.

### Interpretation of readings

Over the years we have had some problems with various monitors providing misleading results. Care must be taken to evaluate the results obtained against reasonable expectation for the site. Common pitfalls include using the same monitor to measure the input and output of a filtering device. This results in the noise spikes bypassing the filter through the monitor! Sometimes there is a very poorly defined line between cause and effect.

On particularly bad sites we have eventually connected a conditioner to a simple resistive load on the secondary of our conditioner and monitored the voltage across the load. This removes the chance of extraneous noise data coming from an unknown load situation. Such practice can also alleviate the problems of mains difficulties being mixed with unrelated data corruptions and failures due to other causes.

### Specifying the conditioner

The application must be reviewed for some basic parameters before we can quote for the supply of a suitable unit. In addition background information can be very helpful in choosing the right technological solution.

The technical information suggested on hb055 is a good starting point.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb059 Special applications - UK weighing memorandum

## Background

The National Weights and Measures Laboratory (NWML) is a section within the Department of Trade + Industry.

NWML has instructed officers in the field to ensure that remote weighing sites are properly protected from an electrical supply point of view.

In cases where remote weighbridges and similar equipment is operated from small generator supplies there is a mandatory requirement to fit power protection devices in series with the electrical supply.

## Memorandum WM 429

The NWML has issued a Memorandum describing both the equipment which must be protected and how. The main part of of the Memorandum is transcribed here: An original is available on request from your local Weights + Measures.

## DTI logo

NATIONAL WEIGHTS AND MEASURES LABORATORY WM 429

Department of Trade and Industry (November 1988)

Stanton Avenue Teddington Middlesex TW11 0JZ

## Memorandum for the guidance of Inspectors of Weights and Measures

WEIGHTS AND MEASURES ACT 1985

Section 12

The Secretary of State has issued the following amendments to the respective Notices of Examination/Certificates of Approval.

Generator powered equipment amendment No. 1 dated 14 October 1988

Type of Machine	Code Index
Counter machines	V (2) d V (2) e
Platform machines	V (6) d
Weighbridges	V(6) d
Person weighing machines	V (6) f
Overhead weighing machines	V (7)
Milk weighing machines	V (8)
Suspended weighing machines	V (9) a
Crane weighing machines	V (9) b

Issued by NWML

Digital electronic machines and associated approved peripheral equipment.

As described in the Notice or minor modification to the Notice of Certificate or authorised variant thereof but having

where appropriate the supply from a local generator in place of the mains supply.

In which case there shall be between the generator and the weighing equipment a constant voltage transformer Advance GT series of between 100 VA and 1000 VA rating. The rating chosen must be such that the minimum load on the CVT is not less than 5% of the rated output of the CVT and the maximum load including transient loads such as printing does not exceed the rating of the CVT.

The output of the CVT must be dedicated to the weighing systems and either:-

- (i) hard wired directly to the system or
- (ii) via a non standard connector in which case the output shall be marked "for weighing system only".

end of memorandum

# hb061A-G AIT series type test results

## Introduction

The Advance series of AIT power conditioners was introduced some years ago to provide a highly effective noise filter for modern ICT equipment. The technical differences between the AIT and our traditional ferroresonant power conditioners are covered in [hb026](#). However we are routinely asked for type test results relating to their performance. Perhaps the best test is the high integrity of all the thousands of installations world-wide in telecomm and EPoS applications.

## Features

The technical results show that the electrical performance of this type of conditioner is second to none for noise spike attenuation. Common mode noise is virtually eliminated and transverse mode noise is reduced well below any CBEAMA threshold. In addition the unit provides galvanic isolation between the input and output. These conditioners have conservatively rated magnetics to accommodate the large surges and high crest factor loads found in modern SMPS. The AIT is ideally suited to office applications where small size and low audible noise are of paramount importance.

## Benefits

Protected ICT systems will not be damaged by the high energy spikes associated with lightning striking overhead distribution wires. Other electrical mains-borne noise will either be reduced to an acceptable level or completely eliminated. The AIT reduces warranty and power supply maintenance costs of ICT equipment to a minimum.

## Results

The results shown are typical for a range of type tests designed to stress the unit as far as possible without destroying it.

## Electrical safety

AITs comply with Class 1 to EN 60950 BS 1362:1973 BS 1363:1984 sect 12 + 13 BS 2754:1977 Units were tested with BS standard finger and pin and found compliant.

## Breaking capacity

Fuses comply with BS 1362.

## Flammability

Materials found to be compliant with UL 94VO.

## Insulation resistance

Between any two terminals the insulation resistance was  $>2\text{M}\Omega$  measured at 500Vac. (Mains neon and protection elements removed).

## Voltage regulation

A step change from 10 to 90% in applied load was made in less than 1mS. The output voltage decreased by less than 5%.

## Critical phase angle

The AIT is insensitive to the effects of phase angle.

## Load side surge protection

An impulse generator capable of producing a combination waveshape of 2.4kV open circuit and 200A short circuit was used for this test. No electrical or mechanical damage occurred.

### **Electrical fast transient**

The surge generator used is capable of producing a 5nS/50nS waveshape of 2kV open circuit voltage and a 2.5kHz repetition frequency. The test waveform is applied for 15mS every 300mS for 10 minutes. The waveform is described in IEC 801-4 1988. For both polarities the peak voltage appearing on the output terminals was <400V.

### **0.5µS 100kHz ring wave test**

Positive and negative polarity tests were made LN/LE/NE. Output voltages were <10V symmetric and <0.5V asymmetric.

### **Impulse discharge limiting voltage**

A generator capable of a current of 5kA peak 8 x 20µS waveshape into a short circuit was used to apply 30 tests incorporating both polarities and all terminals. Output voltage peaks were all < 800V.

### **Failure modes**

The 5kA 8 x 20µS waveshape blew the input fuse as required on all tested samples.

### **Overcurrent performance**

The units were tested with slowly increased loads until the overload protection operated. Units must run for >2 hours at a load just below the point at which protection operates. Case temperatures remained below 46°C

### **Mode transfer**

The 5kA 8 x 20µS waveshape was applied between LE and measured between LN + NE. The 5kA 8 x 20µS waveshape was applied between NE and measured between LN + LE. At no time did the peak impulse output voltage exceed 200V.

### **Insertion loss**

The symmetric and asymmetric insertion losses were measured using both methods described in BS 6299 section 4.1 Appendix A. Insertion loss was <65db over the range 10kHz to 30MHz. Negligible noise is transferred between modes. Waveforms relating to these tests can be viewed at the factory.

# hb066 Safe Installation + BS 7671

## Introduction

Installers of permanent electrical wiring are required to ensure that new work meets current regulations. The UK wiring regulations have been converted to a BS specification (BS7671) which at the time of writing is being CENELEC harmonised. Current regulations are designed to ensure that new installations are safe under fault conditions. 'Safe' means that the installation cannot harm a user OR cause a fire. For normal industrial and domestic site work the required testing usually covers BOTH needs.

In some special cases where the wiring is modified by local conditions EXTRA tests and results must be considered before a site can be signed off by the installer. There may also be situations where commonly used test equipment may damage part of the installation and defeat one or more reasons for the test. As manufacturers of electrical power conditioning equipment we offer the following guidelines to the extra special conditions which must be considered.

## Power Conditioning Equipment

This may be an in-line filter or a generator. The filter may be of a galvanically isolated type. The generator may be a small rotary type or the static inverter found in uninterruptible power supplies (UPS).

The wiring regulations and good practice are founded on the expectation that electrical power is derived from a low impedance source. Fault conditions usually result in the clearance of a protective element such as a fuse or magnetically operated breaker. Most power conditioning equipment is by its very intention NOT low impedance.

In addition there may be electronic or magnetic control of either voltage or current which cause the equipment to have a real impedance which is modified in operation to an apparent impedance. The installer must be aware of the critical schematic for the equipment being installed and consider all operational modes of current path selection devices. In addition distribution discrimination must be shown in the usual way.

## Special considerations


Two different views must be taken in cases where the supply is provided by an apparent or actual higher impedance source:

The first consideration is user safety:

the installer must ensure that when any live conductor is connected by a fault to an exposed earth that the resultant VOLTAGE is not unsafe. (In practice it is assumed that the fault is zero impedance) The voltage generated across the earth impedance ( $Z_e$ ) by the fault current must be 'safe'. Although this is usually below 50 volts good practice and margins mean that a target of 5 volts is more realistic. If there is significant source impedance ( $Z_s$ ) whether real or apparent this must be considered in the calculation of the worst case fault current.

The second consideration is fire:

the installer must consider the worst case CURRENT under any one fault condition. If the apparent source impedance of the supply (shown as  $Z$ ) is large enough to prevent the wiring from overheating then the protection is NOT required to open.

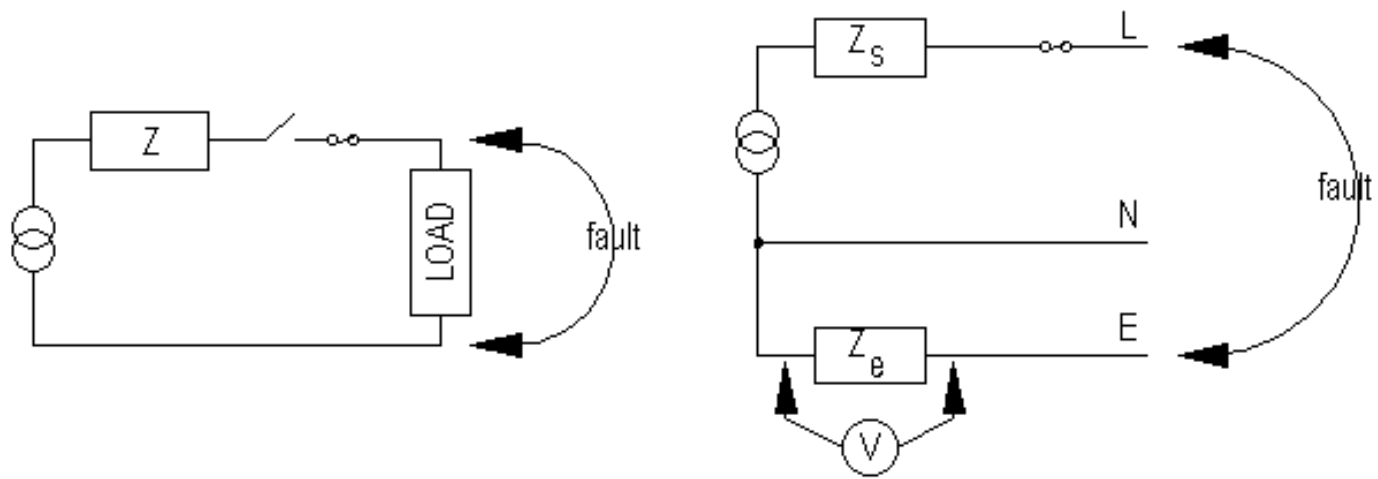

Since there is an almost infinite variety of potential installation variations even using our own products some further suggestions for ensuring safe installation are outlined in [hb067](#).

UK: 01978 821 000 Tel: +44 1978 821000 © [AEL Group](#)



# hb067 Safe UPS Installation + BS 7671 - pt 2

## Introduction

A typical uninterruptible power supply (UPS) requires EXTRA calculations to be performed before installation and sign-off.

In the illustrated case the UPS has no galvanic isolation and the earth + neutral go through the unit. The recommended bypass switch means that it is possible for the distribution wiring to see the low impedance mains supply.

For the first part of the calculations the UPS should be ignored and the wiring calculated out in the normal way. It is unlikely that when the UPS is introduced into the system that the rating of any wiring will have to be increased EXCEPT the input supply.

## Input supply

Most UPS equipment is not 100% efficient. In addition to supplying the full rated load current modified by the UPS efficiency there is a need to support the battery charger as well. The UPS manufacturer should provide worst case input power needs. For longer supply runs this often means that a larger wire is required than expected for an installation where there is no UPS.

## Testing


For the first part of the testing the UPS should be isolated and the distribution connected to the main supply via the bypass switch. Normal checks should be applied using calibrated equipment.

NOTE: some modern pulse-based testing equipment can damage electronic equipment which should normally be disconnected during testing.

The second consideration is where the distributed power is supplied by the static inverter in the UPS. This has real and apparent impedance. The apparent impedance is electronically controlled and should be specified by the UPS supplier as a worst case current available from the UPS.

For user safety the installer must ensure that the earth loop impedance is sufficiently low so that it provides a voltage inside regulations for the worst case fault current available from the UPS. It should be appreciated that under these conditions over current fault protection may not clear.

For fire safety the installer needs to evaluate that all the distribution wiring will not overheat or it must clear protection under fault conditions. If the current is below the continuous current rating of the wiring the apparent source impedance may mean that the protection does not clear.

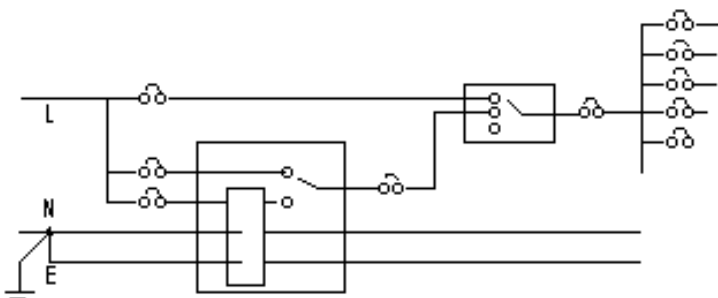


# hb068 Laboratory power facilities

## Introduction

There are inevitable compromises with ALL methods of Electrical Power Conditioning. It is up to the USER to establish which technology provides the most attractive solution.

## Flexible power solutions for Laboratory Installations

In the Test House or Specialised Test Facility where a variety of solutions can be required it may seem that the most flexible solution is to provide a number of small stabilisers and battery back-up units which can be moved around to the point of application. Experience shows that there is one extra major advantage to planning the needs when the facility is under construction and wiring out several power supply options to every general purpose test station. The advantage is that ALL power conditioning products have ratings which are determined by cost and if the distributed conditioning is combined into a central facility it is less likely that a test piece will be too large for a mobile conditioning solution.

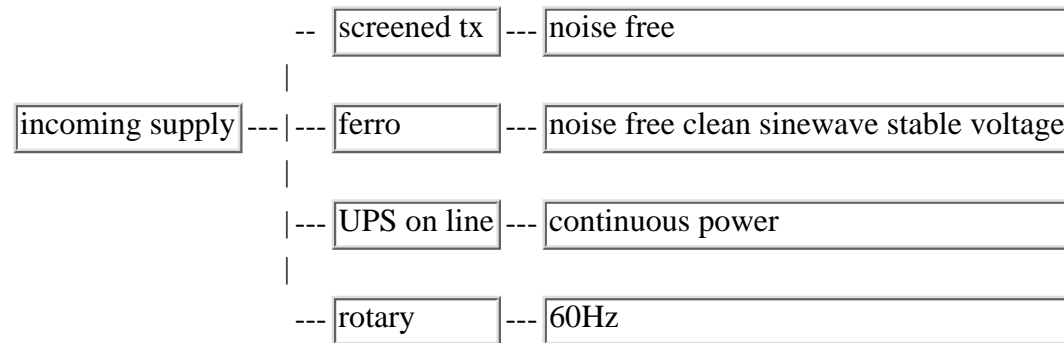

There are several other considerations including efficiency impedance/shared usage load effects and MTBF. These are summarised in the table:

Topology	prime characteristic	features	benefits	considerations
surge diversion	lightning protection	low cost	zero series impedance very high MTBF	fit to guidelines in BS6601
notch filter	narrow band noise attenuation	low cost	unwanted frequency rejection	only works over design frequency band
isolation transformer	galvanic isolation	low impedance	safety of personnel	use RCCDs for protection
low impedance conditioner	galvanic isolation noise attenuation	exceptional common-mode noise protection	ease of application efficiency	leakage inductance adds to mains impedance
ferro resonant conditioner	transverse-mode noise attenuation voltage stabilisation	exceptionally robust noise filter waveform notch replacement sine waveform re-building 2-way filtering voltage stabilisation	clean mains supply MTBF=200kHr overload proof	weight efficiency 3-phase delta loads input protection down stream protection
UPS off line	normally on standby	lower cost	provides emergency power	switch over time usually lower power ratings battery maintenance
UPS on line	load runs on inverter full time	provides 2nd source supply	provides emergency power	non unity PF loads 3-phase delta loads battery run times efficiency battery maintenance MTBF=20kHr

rotary converter	50 to 60Hz etc	low technology solution	virtually perfect noise rejection	usually fixed frequency MTBF=5kHr maintenance cost
generator	chemical energy source	huge range of options	permits manual frequency variation	noise maintenance environmental problems

Advance supplies all these products. If you need any more help - please ask!

---


UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb069 Pairing + monitoring system

## BASIC PRINCIPLES AND OPERATION

### OUTLINE

Two Constant Voltage Transformers are fed from two separate supplies the outputs of the CVT's are both connected to the same load. Under normal conditions each unit supplies approximately 50% of the load power. If one of the supplies fails the back-feeding transformer is made safe and the remaining transformer provides all the load power without any disruption. Either CVT may be isolated and safely removed while the system is operating and the CVT maintained or repaired. Replacement is best done at service shutdowns but can be done on-line if essential.

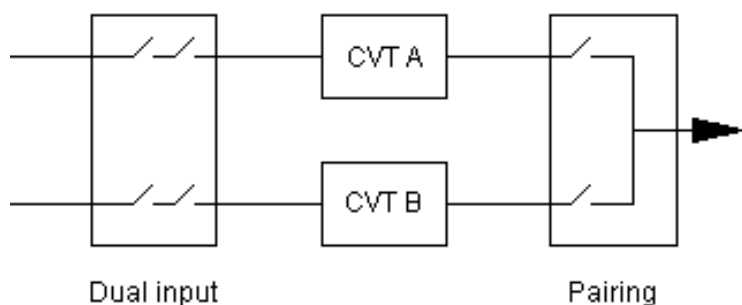

### DUAL INPUT CONTROLLER

Two separate supplies are connected to the input terminals. Each supply passes through the main poles of a n/o contactor - the coil of which is controlled and monitored by current sensing relay and associated circuitry.

The supplies then exit the controller via output terminals to be connected to the inputs of two Constant Voltage Transformers.

The supplies in the controller are indicated by neons. The supply to each transformer is operated by locking the key switch in its "closed position 1" and pressing the green "on" button. When the supply has failed the both neons are off. If the red "off" button is pressed then only the "CVT - input on" neon is off.

### PAIRING AND MONITORING SYSTEM

The two separate outputs from CVT 'A' and CVT 'B' are connected to the input terminals. (Terminals S1 S2 S3 and S4 in both systems must also be interwired to provide a supply to the main contactor coils).

The main wiring then passes through the main poles of the N/O contactor (the coil of which is operated by the current sensing circuitry in the dual input controller) and then paired together at the high - low output terminals (to which the critical load is connected).


The load sharing of each transformer is monitored on the two ammeters with the output voltage of the system is shown on the voltmeter.

Provision is made for remote alarm circuitry by using N/C contacts on the alarm terminals

## hb070 3 phase open delta ratings

The 'open delta' transformer is still the best way to transform the three phase output of a UPS into a single phase. In general it is better to try and avoid the transformer all together. However there are some considerations about the load characteristics on the UPS. The phase currents supplied by the UPS will be unbalanced. This unbalance is calculated thus:

assume the load is resistive assume the transformer ratio is 1:1 assume the supply is 400Vac and the load required is 1kVA the load in the input centre limb must equate to the sum of the other two inputs the voltage across the load must be  $400 \sqrt{3} = 692.8\text{V}$  for 1kVA then  $1000/692.8 = 1.44\text{A}$  therefore current in common leg is 2.88A for each kVA of 1PF load

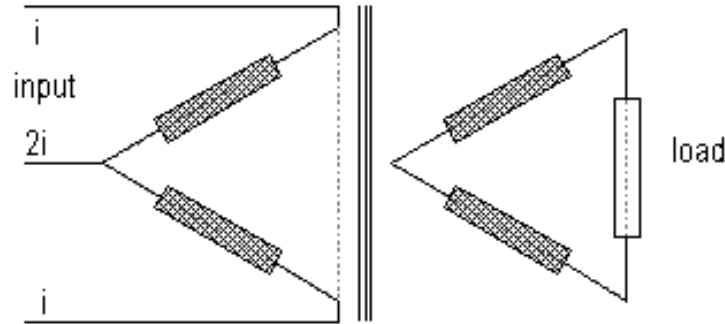

In specific applications care must be taken to assume that

the transformer is only 94% efficient the voltage may not be 400 ph-ph the UPS may have difficulty with the unbalanced load the PF of the load may affect the calculation

A sample calculation is shown:

for a 20kW single phase load a 20kW transformer is required the transformer will require  $20 \times 2.88\text{A} \times 230\text{Vac} = 13248$  watts on the common transformer leg the UPS will need to provide 3 times this if it has three separate inverters and 2 times this if unbalanced loads are tolerated the power is  $13248 \times 3 = 39744$  watts - assuming the UPS has a capacity to provide only a 0.8PF the UPS size is 49600VA! the transformer is about 94% efficient meaning a final figure of 52.851kVA is appropriate

A much better solution is to use two units rated at 12kW and run them in parallel

If the application cannot supply a single phase at the required load a cost effective solution is to use a single phase input UPS with a phase/phase input transformer rated 400/230Vac on the input to the UPS.

If you need any more help please ask!

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb071 digital camera problems

## Introduction

The advent of very high quality scanning backs for studio cameras has caused a new interest in mains related image noise problems. Most photographers are not engineers and this page attempts to provide enough information for a studio camera user to try and evaluate whether or not a particular problem may be solved with mains power protection devices.

## Diagnosis before cure

In most technical applications where problems occur it is usually easier to effect a cure if the problem is actually understood. By examining images which have been produced by a suspect digital camera under different conditions it may be possible to eliminate possible causes of a problem. It is also necessary to have to hand the expected performance for the camera. If the camera was never intended to produce an acceptable image under the conditions of test - then no amount of mains protection is going to improve it! (Some camera manufacturers have been reluctant to give measurable figures for performance and we feel this is unacceptable.)

## Popular image problems

We usually ask photographers to examine poor images for the following problems:

### variation in lighting conditions during the scan

An example of this is in a studio where ambient daylight is illuminating the subject and the sun goes in or out during the scan. In the simplest example where the sun starts behind a cloud and comes out during the scan there will be an overall brightness increase across the image in the direction of the scan. The change will be directly related to the rate of change of sunlight variation compared to the rate of scan. Clearly elimination is straightforward.

variation in artificial lighting due to mains problems

## SPIKES

- these short duration occurrences can produce bright spots in one line of pixels caused by the light actually brightening up momentarily - unusual even in direct off mains tungsten lighting because the spike energy has to be quite large. This effect is normally completely random.

## BROWNOUTS

- this is where the mains voltage sags and the light given out by unstabilised tungsten lights literally dims down for the same period as the voltage droops. The result is similar to the sun going behind a cloud during the scan. (This process can work the other way with voltage surges) and may vary considerably during a scan.

### variation in artificial lighting due to mains frequency beats

The UK mains supply is modulated at 50 Hz (cycles per second) and direct-off-mains tungsten lights (ordinary bulbs) flicker at this frequency ALL THE TIME! The human eye 'integrates' the effect and does not notice it.

This causes a problem which is always difficult for non-physicists to understand but musical people are familiar with tones which 'beat' and the same effect can happen when the effective scan rate is close to 50Hz or a multiple. The result is that some lines of pixels see bright light and some dark.

The picture will have a series of 'fringes' parallel to the scanning sensor - width and spacing of the fringes will be set-up and scan-rate dependent. Cameras have anti-fringing software to combat this problem. Usually the result looks like a venetian blind shadow over the image. It can also produce multicoloured effects not just light and dark because only one colour channel may be beating.

## light path obstruction

If a piece of dirt is stuck to the scanning sensor it will produce a (usually coloured) line in the direction of the scan. Usually the line is across the entire frame and the problem can only be corrected by using cleaner techniques. If the sensor is clean and the line is always the same colour it suggests that the sensor is faulty.

## camera technology

this is a huge subject and only briefly touched here the image faulty areas should be pushed to the limits of installed software using mainly contrast and brightness adjustments to view the image pixel by pixel to try and assess what is actually happening as the sensor moves along.

If there is quite a lot of colour variation along the line of pixels when scanning an evenly illuminated area it is probably directly related to any interpolation in the process or sensor/amplifier inconsistencies. (Users should appreciate that the analogue scanning data is converted to digital information right after the scanner head. The A to D process is where the electronics value really costs!)

Colour variation in the image under these conditions must be reviewed with the supplier specification to assess if it is typical or worse than usual for the camera back. Tests should be done at different scan rates and exposure combinations (f-stop & light change) to try and discern the relevance of the fault to external influences.

'Fringes' which occur along a distinct line of pixels across the scanning sensor are consistent with a change in camera system amplifier gain between successive pixel rows and really should not happen.

If a step function in the overall 'gain' characteristic occurs on a random basis check the fringe to see if it gives the impression that the back slowly drifts in its gain value and then suddenly regains control going back to a figure from several pixel lines previously in the scan. If so it can be either mechanical sticking of the traverse lack of amplifier gain control or a voltage fluctuation caused by changing loads elsewhere.

## Summary

Sometimes it helps to build a test setup to eliminate external influences and still demonstrate that the back produces problems. A simple battery driven lamp which has no 50Hz and no spikes! It can be arranged to have no droop through the actual scan process by using a relatively large battery. The best approach would be a car battery and a couple of headlamp bulbs. To be utterly pedantic the bulb voltage could be monitored during the scan.

The subject should be a nice plain background with a small object used temporarily to set up the correct focus to simulate an actual shooting scenario. This test would eliminate a large proportion of the external influences which could otherwise be erroneously blamed.

Finally if after evaluation it is felt that the camera is really suffering from a direct or indirect mains related problem please ask us for help.

We can provide a UPS to provide power when the mains is down a power conditioner to remove spikes or a more sophisticated one which stabilises the voltage supplying either the camera lights or both. Normally we would loan a unit to allow the photographer a chance to prove what may be an expensive cure actually solves the problem. We have at least one obsessive photographer on site!

If you need any more info please ask!

# hb072 ICT installation considerations

## Introduction

Installers of permanent electrical wiring are required to ensure that new work meets current regulations. These regulations are designed to save life in the case of faulty wiring or equipment. Further the practice is regulated to make our offices factories and homes safe places to live from a fire risk point of view.

## ICT systems

Unfortunately modern equipment suffers from a wide range of other influences. Some of these may actually cause sensitive electronic chips to fail. Just wiring up and performing routine regulation oriented checks is inadequate when [mission critical](#) or crucial systems are involved.

## Considerations

By the time the wiring is being installed it is already too late. The retro-fitting of a star earthing system after a computer room has just been quite safely wired up involves a full strip out and re-install.

## Safety

The regulations require that all permanent wiring is compliant with [safe practice](#). Normally this means calculating [fuse sizes](#) and selecting wire sizes to create protection discrimination and quick disconnect.

The electrician is required to bond all exposed conducting elements in an equipotential zone together. As a practical matter this is normally done in a daisy chain fashion which is entirely safe. From a noise diversion point of view it can be a disaster. Just checking earth loop impedances does not mean that no earth loops exist in the protective wiring. A proper star plan must be evolved and the installer should prove the installation before connecting sensitive equipment. The regulations are covered by BS 7671 (until recently `the 16th edition').

## Noise

Transients can occur naturally in our environment (lightning) and in heavy equipment switching. Specific attention must be given to the likelihood for such occurrences and a planned approach used to divert them as quickly as possible to earth.

Earth cabling should not be connected to more than one star point and all cables should radiate like spokes in a wheel.

Data cables between equipment must be checked for earth isolation at one end of the screen.

Data cables going outside the equipotential zone may require specific fitting of surge diversion boxes. This also applies to phone lines. Recommendations are given in BS 6651.

## Static electricity

The static charge commonly experienced as a definite spark between humans and earthed objects in dry weather will destroy the silicon chips in a computer or telephone switch.

## Aliens

ICT equipment mains circuitry should never be available (preferably by the use of hardwiring or special plug tops) to alien loads such as the office kettle or vacuum cleaner.

## Networking

As our systems become more complex and critical to our daily business operations all installations should be planned for best practice. Networked systems are particularly prone to problems appearing in unexpected places. Modem lines



monitoring communications and transducer signals with long wires connected to the network are perfect aerials to collect harmful spikes.

## **to avoid earth loops**

### **Introduction**

With the ever increasing use of Information + Computer Technology (ICT) equipment there is a greater chance of installation with unsatisfactory wiring.

### **History**

The traditional UK electrician is taught to earth all metallic chassis. His training is directed towards making all installations safe. If single phase work is properly carried out he will check that the three conductors are definitely connected where they should be and definitely not where they should not be! Clearly he will also check for correct use of live and neutral and prove discrimination on fusing. He may also install added safety protection in the form of an RCCD.

### **Today**

These checks are no longer adequate. We have found that some wiring which is perfectly safe is quite unsuitable for ICT equipment. In some cases the use of mains noise protection equipment could be avoided by better wiring practice. However it is usually less expensive to retrofit protection rather than re-wire a whole building or even just the computer network. A better solution is to approach the problem at the planning stage. In addition to ensuring that the wiring is safe some specific attention must be made as early as the planning stage for wiring practice which ensures the best results for data processing equipment. After the installation is complete some extra checks should be carried out while the system is not connected to the supply and conductors may be temporarily disconnected.

### **Practice**

The objective is to provide a totally safe installation without any earth `loops`. An earth loop can give rise to surprisingly large currents in low impedance circuits.

These currents can cause mysterious data processing faults hum problems and failed communication ports on PCBs in EPoS equipment.

### **Good results**


The diagrams show the incidence of an earth loop and approaches to wiring to avoid them. In simple terms all equipment must be earthed in only one place. The following checks should be done on the wiring of a system prior to considering if it is satisfactory for ICT use.

- 1 ALL existing statutory checks should be made.
- 2 The `star point` earth connections should be opened and all related equipment checked for isolation from earth.
- 3 On installations where there is galvanic isolation provided by a mains noise protecting device the galvanic isolation must be proved.


Checks should be made for both earth and neutral conductors.

- 4 Once inter peripheral data or video lines are connected the earths of EACH peripheral need to be checked for single connection only.

(This is best done on a networked system by removing all mains plugs from their sockets and seeing if any plug earth pin is connected to any other)

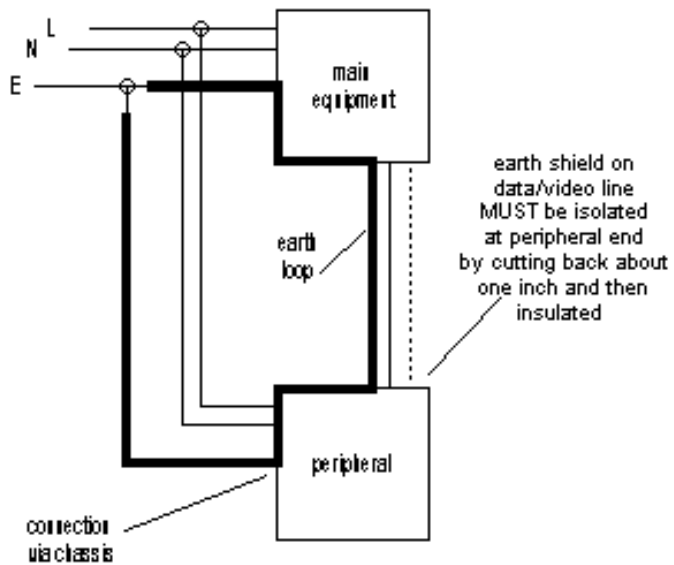

Incidence of earth loop via data cable screen and peripheral earthed chassis

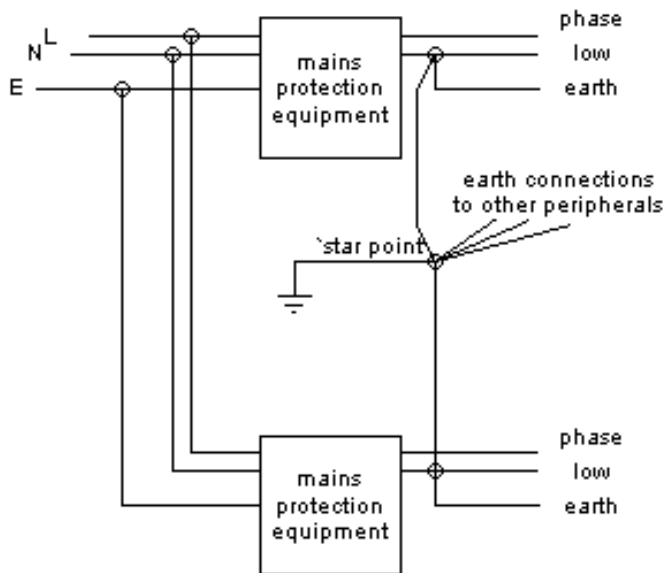

Preferred practice for wiring two conditioning products to the same star earth

# hb101retrofit wiring for EPoS systems


## Background

A number of customers have asked us to document an approach to the replacement of poor EPoS wiring in recreational establishments

The need to re-wire is usually to ensure that the EPoS system is correctly connected and that no unrelated loads are on the same circuit

Where a site is prone to noise related problems caused by unknown or unpreventable causes the re-wiring will not necessarily make all the historical problems disappear. However it does mean that the wiring arrangement is clearly defined and will not have any earth loops

In addition the provision of both a dedicated line clean earth and the absence of all earth loops often solves transient noise related problems. In all cases the current regulations must be observed. The diagram shows the principles of the new wiring arrangement

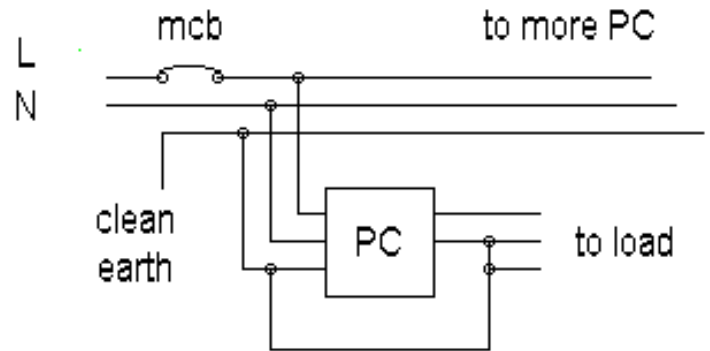

## The Spur

The EPoS equipment is generally fed from a single spur protected by an MCB

This spur should be routed around the building avoiding runs close to other wires - especially high power cables. The wire (conventional twin and earth) must be sized according to current regulations

## The MCB

Type 4 is desirable to allow for the high switch on surges of CVT types of Power Conditioner

## The Earth

The earth is derived from a dedicated earth rod of suitable impedance. NO other equipment should be attached to this earth.

Care must be taken to ensure no earth loops exist. This can be tested by disconnecting the earth rod from the spur and checking all gear is isolated from earth

## The Power Conditioner (PC)

This will usually be one of two types.

- 1) CVT based unit with voltage stabilisation and 'bullet proof' noise protection. The CVT also provides soft start to the load and waveform re-build and well an enhanced ride-through for mains micro breaks
- 2) AIT series low impedance conditioner designed to remove ALL common mode noise

In either case the clean earth is fed to the unit as a safety earth. If a CVT is fitted the output 'low' MUST also be connected to the earth. For the AIT series this connection is internal

## General

It is good practice to ensure that no free sockets are available for non EPoS loads - kettles vacuums etc.

If for any reason RCCDs are to be fitted they will only protect the load if installed AFTER the PC

The installer should check the wiring is NOT connected to any other circuit

The system data cabling MUST be checked to ensure that the earth screens are only connected at ONE end

A diagram of the completed installation MUST be kept to assist further investigation if problems persist

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)


## hb511 GT series MTBF with ambient

Advance's GT series power conditioners have an ambient temperature rating of 40C.

The family can be used in higher ambients without derating but MTBF is reduced.

Units up to 2900VA need not be derated. For large units please consult the sales office.

Ambient Air °C	MTBF hrs
40	200 000
45	100 000
50	50 000
55	25 000
60	12 500
65	6 250

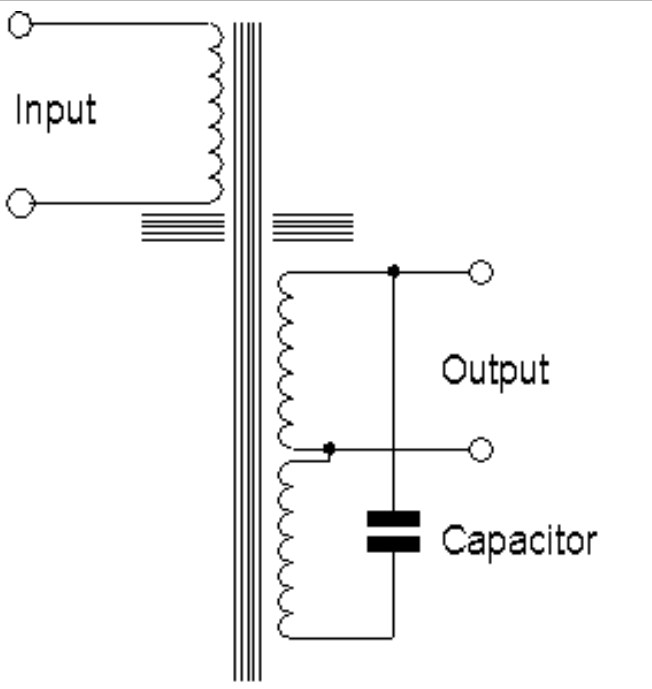

CVT circuit

MTBF calculated to MIL 217C ground benign.

In addition Advance can design tailor made versions for a specified Temperature.

### CVT Failure Modes

The CVT is basically a saturated transformer with an output resonant circuit maintained by a capacitor.

All transformers have the failure mode of "shorted turn" where winding damage causes a part of the winding to short (either to earth or to another layer). This leads to large current flow in a small part of the winding typically blowing an input fuse or breaker.

In addition windings can go open circuit leading to either no output from an energised transformer or no energisation.

This can happen only on the INPUT of a CVT, because the OUTPUT winding is current limited, in the case of a shorted turn on the CVT output, it is unlikely the current draw will be sufficient to blow an input fuse before the CVT output "folds" to zero volts. In fact it is possible to directly short the entire output winding of a CVT and then remove the short without damage to the CVT and restoring the output as soon as the short is removed.

In addition to standard transformer failure modes the CVT capacitor can be considered a weak point. Advance uses only GE Capacitors that are specially designed for the rigorous duty required in a CVT. These capacitors are oil filled and some "ageing" of this oil occurs causing a recommended replacement after 8 years, based on a 10 year expected life span. The capacitor has an integral fuse, which can cause an open circuit on failure, since this leads to a loss of saturation in the output the symptoms of capacitor failure are low output voltage.

Some CVT's are fitted with protective earth screens on windings to improve attenuation of high frequency noise. These screens can short to each other but the only effect is to reduce the attenuation at high frequencies.



# hb514 COSHH datasheet for Advance UPS + Power Conditioners

## Scope

This sheet refers to all catalogue UPS and Power Conditioner products supplied by Advance.

## Policy statement

The company does not use any of the following substances in the manufacture of its products:

Asbestos (blue/brown or white) Benzene or related carcinogens Cadmium for plating components Halogenated (Chlorinated/Fluorinated) solvents Ozone depleting substances Polychlorinated Biphenyls

## UPS + Power Conditioners

Although we are required to control some of the substances produced during the manufacture of these products all are covered by the guidelines provided by COSHH consultant ORL dated Oct 1989.

No substances described in COSHH regulations are present in significant volumes in finished product EXCEPT for those found in electrical storage batteries in UPS products.

These items are manufactured to be leak free and can only be a chemical hazard if damaged.

Attention is drawn to our Health + Safety data sheets [safe battery handling](#) and [safe battery disposal](#).

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

**hb563 Preventative Maintenance Checklist**

Job #		Customer	
Model #		Engineer	
Serial #		Date	
Check that the customer does not have any problems or questions concerning the UPS.			
Surrounding Environment			
Bypass	OK	Needs Attention	Not Applicable
Switch Fitted?			
Condition			
Operation			
Terminal Tightness			
Check auto bypass operation (if fitted)			
UPS	OK	Needs Attention	Not Applicable
Clean Fans and Ventilation Slots			
Check Fan Operation			
Internal Condition			
Clean Boards			
Check Wiring and PCBs for signs of heat damage and wear			
Check that all connections are tight			
Check that all earth points are tight			
Check that any oil filled capacitors are not leaking			
Check for old blue type capacitors change as necessary and remove thermal fuses			
Check I/O voltage and battery voltage for calibration			
Check that any internal/external chargers are functioning correctly			
Batteries (Internal and External)	OK	Needs Attention	Not Applicable
Check battery terminals for corrosion and tightness			
Before load testing check battery float voltage			
Load test UPS 100% and check battery			
During battery discharge check dc current calibration			
Check battery charge current			



Logs	OK	Needs Attention	Not Applicable
Check inverter logs for errors			
Check alarm logs for errors			
Clear alarm and inverter logs			
Front Panel	OK	Needs Attention	Not Applicable
Check the set-up of the UPS			
Set the time and date			
Run battery and inverter test from front panel			
Check the front panel operation			
Perform full operational test and download system memory			
Notes			
Customer Name			
Customer Sign			
Position			
Comments			
Engineer Sign			
Date			

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb572 UPS ideal customer - top ten actions

## Introduction:

Occasionally we are asked by companies who are unfamiliar with the application of UPS products to help with planning a new installation

This list of headings is a 'top ten' of considerations for a new installation:

### 1 Consider the whole picture

there is no point in making the computer or telephone switch operate when the lights are out the main ISDN is down or some local network hub just went off with the mains power

### 2 Select the right topology UPS

there is a wide range of prices for any size of UPS ensure that you select the right variation for the application

### 3 Fit a bypass

all electronic boxes fail at some time all batteries need replacing eventually. The correct bypass switch (auto or manual) protects the system the UPS and gives a genuine choice of power when all goes wrong! Maintenance can also be carried out during working hours.

### 4 Install + commission the system properly

use a qualified contractor - meet the current regulations - prove protection discrimination - get right size cables fitted use a competent agent to demonstrate the unit functions properly and get the site signed off for safety + integrity

### 5 Plan maintenance

establish a routine for [battery discharge testing](#) in REAL load situations to ensure an adequate capacity is available new batteries will be fitted in time and NOT before necessary if necessary clean fans

### 6 Buy a maintenance contract

control cost of ownership and ensure a fast response in times of need using a standard plan

### 7 Fit a status panel

there are low cost status monitoring boxes to enable you to keep an eye on the health of the UPS

### 8 Use the software

if the mains fails at 7pm and the battery autonomy is only 4 hours the system should shut down the load long before the battery is useless so that some options are available when power is needed the next day for business. UNIX and similar operating platforms REQUIRE orderly shutdown to avoid cost downtime during the rebuilding of a File System

### 9 Hook up to a national monitoring service

if you need real protection get the supplier to monitor the UPS from his heavily protected national resource the service engineer may be knocking on your door before you know you have a problem!

### 10 Read the manual

at least TWO members of staff should be familiar with the usually simple external UPS controls and/or the bypass

operation

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## Method statement for install and commission of UPS

Work to be undertaken	Detail
work to be carried out at	
site contact / tel no	
start date	
total workpersons employed on site	One Two Three
Advance responsible representative [A-G CSE]	
<b>Authorisation and permits required</b>	
live working required at commissioning stage	Yes
person responsible for obtaining and ensuring compliance with the authorisation/permit requirements and this statement	A-G CSE
authorisation/permits to be obtained from site contact by	A-G CSE
<b>Workplace</b>	
number of vehicles required on site at a location close to work, to deliver and pick up equipment	One
competent UPS engineer who will make provisions for maintenance, inspection and control of the work in the workplace.	A-G CSE
responsibility for access and control of the work	A-G CSE
all materials not used + any waste will be removed on completion by	A-G CSE
<b>Risk assessment materials/substances/agents</b>	
LV cables to be used are provided by Advance	
batteries are low hazard - see <a href="#">safe handling</a> + <a href="#">care</a> battery terminals may be protected using low risk grease	<a href="#">COSHH</a>
there is no risk from materials or working practices to contractors or customers personnel	n/a
<b>Plant and equipment</b>	
only hand tools and small electrical power tools will be used by	A-G CSE
all tools are checked daily for any damage by	A-G CSE
the equipment being commissioned will be visually checked before install	A-G CSE
all potential hazards being created by the equipment being commissioned will be explained to relevant authorised personnel by	A-G CSE
<b>Personal protective equipment</b>	
no special protective equipment is required normal eye, ear, hard hat and footwear is provided to each CSE	protection to be used if required by site regulations
if local site regulations demand extra safety gear - specify needs	
entity responsible for provision of site related safety gear	
<b>Supervision/co-ordination of activities</b>	

responsible person ensuring compliance with this method statement	A-G CSE
<b>Emergency arrangements</b>	
engineer to be informed by site contact of any procedure to be taken in the event of a local emergency	A-G CSE
no emergency procedures are required by the work being carried out by the UPS engineer	n/a
dry powder fire extinguisher is part of the kit being used in the event of a small fire created by the work being carried out	n/a
<b>Training and instruction</b>	
<a href="#">user manuals</a>	n/a
all personnel undertaking the work are trained to manufacturer's standards and are aware of all UPS related risk	n/a
no training instruction is required by site staff on the safety aspect of the work	n/a
<b>Work procedures</b>	
equipment will be subject to a visual inspection by	A-G CSE
adherence to Advance installation instructions ensured by	A-G CSE
compliance to current LV wiring regulations ensured by	A-G CSE
mains power will be applied to unit and tests carried out to ensure correct operation by	A-G CSE
operating parameters will be adjusted if needed by	A-G CSE
external equipment will be tested by	A-G CSE
mains failure test, bypass test and load test will be carried out by	A-G CSE
basic operation training of essential personnel will be carried out by	
finally the customers load, if available, will be connected to the output to complete the commissioning	

## Method statement for repair of UPS

Work to be undertaken	Detail
work to be carried out at	
site contact / tel no	
start date	
total workpersons employed on site	One / Two / Three
Advance responsible representative	
<b>Authorisation and permits required</b>	
live working required at re-commissioning stage	Yes
person responsible for obtaining and ensuring compliance with the authorisation/permit requirements and this statement	A-G CSE
authorisation/permits to be obtained from site contact by	A-G CSE
<b>Workplace</b>	
number of vehicles required on site at a location close to work to deliver and pick up equipment	One
competent UPS engineer who will make provisions for maintenance inspection and control of the work in the workplace.	A-G CSE
responsibility for access and control of the work	A-G CSE
all materials not used + any waste will be removed on completion by	A-G CSE
<b>Risk assessment materials/substances/agents</b>	
spare parts to be used are provided by Advance	
batteries are low hazard - see <a href="#">safe handling</a> + <a href="#">care</a> battery terminals may be protected using low risk grease	<a href="#">COSHH</a>
there is no risk from materials or working practices to contractors or customers personnel	n/a
<b>Plant and equipment</b>	
only hand tools and small electrical power tools will be used by	A-G CSE
all tools are checked daily for any damage by	A-G CSE
the equipment being commissioned will be visually checked before install	A-G CSE
all potential hazard being created by the equipment being commissioned will be explained to the relevant authorised personnel by	A-G CSE
<b>Personal protective equipment</b>	
no special protective equipment is required apart from normal eye and ear	n/a
Advance is responsible for the provision of such equipment	n/a
<b>Supervision/co-ordination of activities</b>	
responsible person ensuring compliance with this method statement	A-G CSE
<b>Emergency arrangements</b>	
engineer to be informed by site contact of any procedure to be taken in the event of a local emergency	A-G CSE

no emergency procedures are required by the work being carried out by the UPS engineer	n/a
dry powder fire extinguisher is part of the kit being used in the event of a small fire created by the work being carried out	n/a
<b>Training and instruction</b>	
<a href="#">user manuals</a>	n/a
all personnel undertaking the work are trained to manufacturer's standards and are aware of all UPS related risk	n/a
no training instruction is required by site staff on the safety aspect of the work	n/a
<b>Work procedures</b>	
equipment will be subject to a visual inspection by	A-G CSE
adherence to Advance fault finding and repair instructions ensured by	A-G CSE
compliance to current LV wiring regulations ensured by	A-G CSE
mains power will be applied to unit and tests carried out to ensure correct operation by	A-G CSE
operating parameters will be adjusted if needed by	A-G CSE
external equipment will be tested by	A-G CSE
mains failure test bypass test and load test will be carried out by	A-G CSE
basic operation training of essential personnel will be carried out by	A-G CSE
finally the customers load if available will be connected to the output to complete the commissioning	A-G CSE

## Risk assessment for service or repair of a UPS

This assessment is predicated on the user providing risk free attendance for the Advance customer service engineer (A-G CSE) at the UPS to be serviced or repaired

The user is also deemed responsible for ensuring that the A-G CSE is fully aware of local hazards

The A-G CSE is required to adhere to all local site health + safety regulations

Location	Detail
work to be carried out at premises	
actual UPS location	
site contact	
start date	
expected duration	
Description	
model no of UPS	
serial no of UPS	
reported problem	
maintenance bypass fitted	
Hazard	
risk before repair	low
risk of electrocution by ac electricity supply	if no bypass switch - load to be disconnected
	all ac equipment to be isolated or supervised whilst exposed
	remote incomers must be labelled and locked off
risk of electrocution by dc electricity supply	safe battery handling techniques will be applied
reduce risk by	disconnect input supply prior to service/repair
	disable output inverter
	safe repair techniques will be applied
	re-connect in controlled sequence
	report safe conclusion to site contact
risk after repair	low



## Risk assessment for installation + commission of a UPS

This assessment is predicated on the user providing risk free attendance for the Advance customer service engineer (A-G CSE) at the UPS to be serviced or repaired

The user is also deemed responsible for ensuring that the A-G CSE is fully aware of local hazards

The A-G CSE is required to adhere to all local site health + safety regulations

Location	Detail
work to be carried out at premises	
actual UPS location	
site contact	
start date	
expected duration	
Description	
model no of UPS	
serial no of UPS	
maintenance bypass model no	
Hazard	
risk before install	low
risk of electrocution whilst using electrical test / measuring equipment	electrical test probes must be suitably fused
risk of electrocution by ac electricity supply	
reduce risk by	remote incomers must be labelled and locked of
	all ac equipment to be isolated or supervised whilst exposed
	live working procedure (ac) to be followed
risk of electrocution by dc electricity supply	
reduce risk by	safe battery handling techniques <a href="#">[hb952]</a> will be applied
	disconnect input supply prior to install
	good site practice re tidiness, lifting etc
	safe wiring techniques (to BS 7671) to be applied
	commission (if required) to standard instructions
	report safe conclusion to site contact
risk after repair	low

	customer contact must be made aware that UPS delivers power when the input supply is unavailable
--	--

---


UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb702 maintenance bypass operation

Installation of a maintenance bypass removes the need to power down the load during routine maintenance or capacity upgrade of an Uninterruptible Power System (UPS). The bypass switch has two positions

### Mains power UPS power

#### Maintenance Bypass Schematic (typical MicroBak installation)

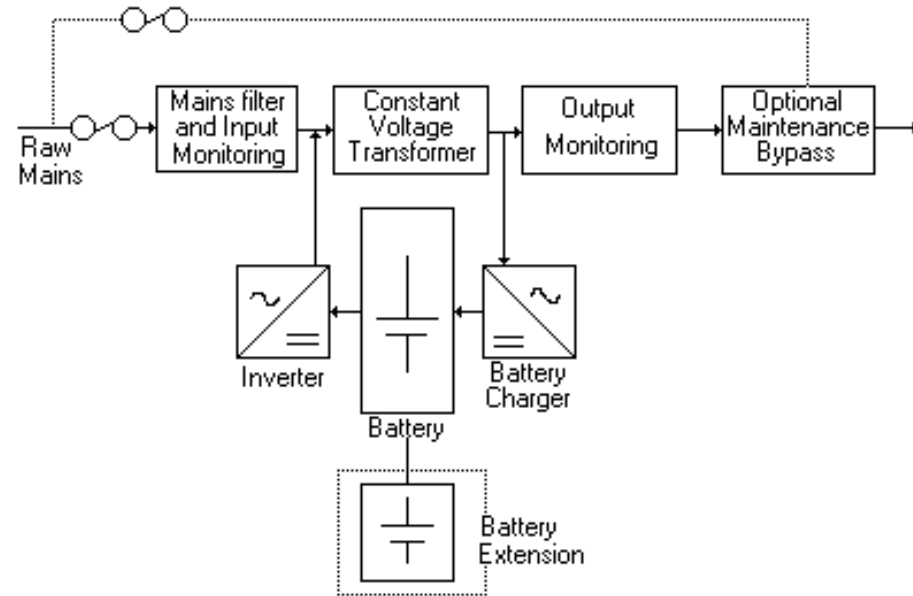

Manual operation of the switch directs which source of power feeds the load. A maintenance bypass is normally wall mounted adjacent to the UPS.

**Maintenance bypass switch types** There are two types of maintenance bypass switch: Make-Before-Break (MBB) Break-Before-Make (BBM) It is normal to install a MBB switch in an installation which requires a 'break-free' power supply as the BBM typically suffers from a 5ms break when turned between switch positions.

**Internal or external bypasses** Some UPS boast that they incorporate an internal maintenance bypass switch. This has two drawbacks

- If the UPS needs to be removed the load will still need to be powered down.
- As the UPS cannot be totally switched off (dangerous ac and dc voltages may be present whilst the engineer performs routine maintenance)

**'Plug and Play' or hardwired** There are two types of bypass installation. An installation may be either hardwired or softwired (more commonly known as 'Plug And Play').

**'Plug And Play'** This uses standard IEC sockets and may be used with any UPS installation up to a maximum of 2kVA. Above this rating the hardwired approach is adopted due to the higher amperages involved. The 'Plug And Play' bypass helps to improve logistics co-ordination and reduce the higher installation costs associated with larger UPS and the more traditional hardwired approach. Its use of standard 'plug-in' connections removes the need to have an electrically qualified engineer attend site. An additional benefit is that UPS utilising the 'Plug And Play' approach are normally user commissionable.

**Hardwired** The standard IEC sockets used on a 'Plug And Play' bypass and UPS have a maximum supply current 10A. Their use is restricted to UPS up to 2k5VA for 240Vac installations and 1kVA for 110Vac installations. In such instances the bypass must be hardwired. A typical installation powers the UPS from a fused spur. The output from the UPS is hardwired through the bypass to the load.

For more details see FBS series and [special needs version](#) or [bypass considerations](#)

## **hb704 UPS delivery + siting**

Most Advance customers choose to allow the company to deliver their order to site. Where a customer wishes a collection can be made from our UK factory. In either scenario the company recommends that consideration is given to the following:

### **UPS weight and size**

UPS weight increases with capacity and battery support time. If the UPS is of a large VA rating and/or has a large battery support time the floor loading of the system should be assessed. For some larger systems it may be necessary to install a spreader plate. On raised platforms such as in computer room installations the platform may also need extra supports installing.

### **Delivery route**

Advance sub contracts its delivery service to one of two specially chosen (and ISO9001 monitored) carriers. The chosen carrier may use a normal wagon or one with a tail lift. In either scenario the customer should ensure that adequate off-loading facilities exist such as a fork lift and that the UPS can physically follow the delivery route to its final resting position. Where access is not direct and over level ground stair climbing and/or lifting gear may be required. If a lift is used its loading should be check. Customers should ensure that they work to the gross packed dimensions and weights.

### **Access for maintenance**

Where a UPS is installed into a non-custom designed room the UPS may be sited into the most available space. Users should ensure that access to the UPS is available for service and maintenance work. This can vary between UPS design and ratings.

Extended battery support times are normally supplied in matching battery cabinets. For some large installations battery racks may be used where the battery terminals may be exposed. In such instances it is recommended that the battery and UPS are installed in a lockable room.

### **Delivery day and time**

Standard deliveries take place inside normal working hours normal working days. Special rates apply for deliveries outside normal times.

### **Standard kerbside delivery**

The company uses the UK carrier network to provide a delivery to kerbside service. The service has a maximum weight limit per item of 140kg.

The delivery company is contracted to deliver the consignment to the nearest vehicle access point to the final location.

The delivery driver does not carry any specialist lifting or siting equipment. For larger consignments customers are expected to provide suitable lifting gear to take the equipment from the delivery vehicle. The carrier is not contracted to unpack the equipment or dispose of the packing materials. There are two delivery services: am next day and 2-3 day service.

### **Specialist delivery siting and positioning service**

The company uses a specialist carrier to provide a full delivery service including siting and positioning.

The carrier is contracted to provide delivery over level ground with easy access to the agreed location on the customer's premises. The carrier may be asked to unpack the equipment and dispose of the packing materials. The delivery service has a delivery date and time arranged to suit the customer and the delivery route. The service can also provide a two man delivery with specialist equipment such as stair climbers by prior arrangement. Crane hire and removal of existing UPS

systems can also be catered for.

---

UK: 01978 821 000

Tel: +44 1978 821000

© [AEL Group](#)

## **hb707 UPS vs. Power Conditioning**

At the heart of most computer and telecommunications hardware is a Switch Mode Power Supply (SMPS).

The SMPS converts the ac (alternating current) mains supply into the levels of dc (direct current) required by the logic circuits.

It is designed to operate on a normal mains supply. Some may have the ability to cope with a limited range of mains fluctuations. Designed to a minimum cost base in a highly competitive market they are the first pressure point in an Information and Communications Technology (ICT) application. A fluctuating mains supply causes 'wear and tear' on the SMPS' components. This leads to operating conditions where it cannot perform crashes or eventually fails.

The second is the internal processing hardware. This requires 'tight' levels of dc to operate effectively and uses internal memories to store data prior to saving to some type of storage device e.g. a hard disk floppy disk tape back up optical disk or flash ROM.

When mains problems cause the SMPS to operate erratically or fail information processing and operation are affected. Information may be lost the system may hang files can be corrupted and the hardware malfunction or even be damaged.

The ICT user is faced with hardware replacement file recreation and downtime costs. The hardware supplier incurs charges to write off against maintenance income.

### **Common mains power problems**

When mains is present the most common types of power problems are spikes electrical noise sags and surges.

Spikes and electrical noise are associated with the use of modern office equipment heavy industrial machinery and nearby lightning strikes.

Sags and surges can be less common unless there is a significant decrease in the capacity of the utility companies to provide electrical power or the site is in a rural location.

Mains failures can be less damaging than spikes electrical noise sags and surges. However they can cause the maximum instantaneous disruption.

### **Power protection**

The natural reaction to mains power problems is to install some form of Uninterruptible Power System (UPS) protection. This may not be the most suitable approach.

Advance tackles power problems by considering whether the application must be kept running at all times how long it should run for and the degree of mains pollution present.

### **Does the load have to be kept running at all times?**

In such instances a UPS must be installed. It should have a sufficiently wide input voltage window to cope with sags and surges in the mains supply.

### **How long must it run for?**

The standard UPS runtime is typically 10 minutes. The UPS types shown below are those from the Advance range which can have extended runtime packs (and chargers) fitted.

### **How polluted is the mains supply?**

For sites where the mains supply is heavily polluted by spikes and electrical noise the UPS may need some form of Galvanic Isolation transformer.

This forms a physical barrier between the input to the UPS and its load. It is the most effective protection against spikes and electrical noise. It can be built-into the UPS at the design stage or installed as a second component in the UPS installation.

## Types of UPS

UPS vary in performance and price.

This is due to the technology used to provide an ac power source from the battery i.e. with a break or without and the inclusion or not of a Galvanic Isolation transformer.

1. ByteBak®The UPS provides a clean stable electrical supply over a wide voltage window. It is a no-break system with some protection from spikes and electrical noise. If Galvanic Isolation is required an AIT series power conditioner (see below) can be installed after the UPS.

2. Elite®The UPS is an on-line system with automatic system bypass in case of an overload or alarm condition. It provides some protection from spikes and electrical noise and operates over a wide input voltage window. If Galvanic Isolation is required an AIT series power conditioner (see below) can be installed after the UPS.

3. MicroBak®The UPS is based on a similar transformer to the GT series power conditioner (see below). It provides the benefits of Galvanic Isolation over a wide input voltage window and a no-break battery supply.

## Can the load stand a break in the mains supply?

Where the application is unaffected by a mains failure (or the budget is not available for a UPS) a power conditioner becomes the preferred solution. Advance power conditioners are transformer based and provide Galvanic Isolation. Any mains borne spikes and electrical noise are routed directly to earth. The protected load receives clean computer-grade power.

## Types of power conditioner

1. AIT series power conditioners provide protection from spikes and electrical noise. They are a 'fit and forget' low-cost and maintenance free product recommended for applications such as EPoS and small PBX applications.

2. GT series power conditioners provide the benefits of an AIT series power conditioner coupled with the ability to provide voltage stabilisation over a wide input voltage window. They are recommended for all SMPS and other applications which cannot cope with a widely fluctuating mains supply.

## Other relevant topics

The bulletins listed below may also be relevant to this topic.

[hb712](#) Elite operation and schematic.

[hb714](#) MicroBak operation and schematic.

[hb715](#) The definition of Galvanic Isolation.

## hb708 UPS Plug 'n Play battery packs

An Uninterruptible Power System (UPS) typically has a standard runtime of 10 minutes.

This can normally be extended through the addition of extra battery extension packs for critical computer and telecommunications applications.

### Battery extension packs

#### Introduction

Most of our UPS product is supplied with an internal battery pack to permit a minimum 'run-time' performance. (Occasionally a unit may be supplied without batteries when customers have their own dc supply)

#### Run times + Battery sizing

It should be appreciated that batteries come in a range of fixed sizes and UPS products usually only work from one dc voltage

This means that if the required performance cannot be achieved with a certain battery configuration the next size up must be selected. Sometimes it is worthwhile reviewing the expected run-time using the smaller battery since it will provide a more economical solution and may only miss the target by a few minutes

#### Performance with actual running load

All our published run times are based on using the UPS at full load and with fresh batteries. A significant extra run-time will result from operating the UPS at less than full load. This should encourage some users to consider having non-critical parts of the load automatically disconnected when the mains fails

#### Battery performance with life

Modern lead-acid sealed gel-cell batteries offer excellent performance. However the environment in which they are operated can seriously influence performance. Care should be taken to keep all batteries at or near to 20-25 deg C.

#### Battery safety

For more information see [battery handling](#) and [safe disposal](#).

The increased battery capacity can extend a UPS battery runtime up to 7 or more hours. When deciding which UPS to choose the user needs to consider whether the battery packs are internal external 'Hardwired' or external 'Plug and Play'.

#### External batteries 'hardwired'

For longer runtimes additional battery cabinets need to be purchased to house the extra batteries and associated chargers.

If the extra cabinets require a hardwired final connection to the UPS this should be performed by a suitably electrically qualified person. The batteries may have also been despatched to site on a pallet and may require building into the cabinet. The complete system is not user commissionable.

#### External batteries 'Plug and Play'

The latest approach for UPS up to 3kVA is to supply battery cabinets to site with the batteries (and chargers if applicable) already assembled inside the battery cabinet.

Standard connector cables supplied with the battery cabinet simply plug directly into the UPS. Where an additional charger is fitted to the battery cabinet the battery cabinet may also require plugging in to a standard mains supply. The system is classified as user commissionable.



## **Customer benefits**

The supply of 'Plug and Play' battery extension packs simplifies logistics to the customer and reduces on-site installation costs.

Deliveries to site may be quicker and the user can install and turn on the system in a matter of minutes. Using the 'Plug and Play' approach and the facility to cascade multiple battery extension packs additional runtime can be purchased and installed at a later date.

## **Maintenance bypass**

A maintenance bypass allows the UPS to be health checked or upgraded without interruption to the load. It allows work to be carried out during normal working hours and should be an integral feature of any extended runtime application.

## **UPS Battery Recharge Times**

Most Uninterruptible Power Systems (UPS) are only designed for short duration runtimes up to 10 minutes Their internal battery chargers are sized to provide a recharge time to a set capacity such as 80% within 10 hours

## **Battery Extensions**

The standard UPS runtime can be extended with additional internal and external battery packs To maintain price competitiveness some UPS manufacturers rely on the UPS internal charger to recharge the extended battery capacity

## **Recharge Time**

Where the battery capacity is increased the standard quoted specification of 'recharge time to 80% of capacity within 10 hours' rapidly increases Some competitors UPS have been found with a recharge time of 50 hours (i.e. over 2 days) on a 7 hour system

## **Mains Failures**

Unfortunately the erratic nature of mains failures is such that long duration failures are usually followed by frequent interruptions whilst the electrical supply fault is corrected Under these conditions UPS installed with extra runtime packs without the benefit of extra chargers will almost certainly switch off due to low battery The UPS will not have been provided with mains power for sufficiently long enough to recharge the battery

## **Recharge Time Calculation**

A simple way to calculate the recharge time of the system quoted is to ask the UPS supplier for the Ampere hour (Ah) rating of the battery pack and the Amperage (A) of the charger The calculation:  $Ah/A$  will provide a fast estimate of the time to recharge the battery to 80% capacity. As battery recharge is a non-linear function the calculation can only be used as a guideline

## **Using the Standard UPS charger**

Using only the standard UPS internal charger with an increased battery capacity the UPS struggles to recharge the battery The UPS eventually recharges its battery within 50 clock hours

## **Fast recharge option**

When the application demands a faster re-charge larger modules can usually be fitted to customer bespoke requirements

## **UPS battery information**

## General

UPS batteries come in a variety of types. Most are selected for cost effectiveness. They are also dangerous! See [safe battery handling](#).

In the case of larger systems batteries are selected for runtimes which are usually only slightly longer than the expected need consistent with just meeting the requirements of back-up time at the end of life.

The UPS requires a fixed nominal battery voltage and to make up the overall capacity the batteries are supplied in a 'string' of standard batteries each of which is also a standard size. This means that the total battery stack is built up from fixed size modules. The result of this arrangement is that there may be quite a discrepancy between perceived need and actual runtimes when the lowest cost set of batteries is selected. Advance will occasionally indicate that a customer specified run-time of 30 minutes may require a 48-minute set of batteries whereas if the customer can accept 28 minutes then the smaller stack may be suitable.

This situation may be made more complicated if the customer VA load is in between UPS sizes and the autonomy time has to be calculated at less than full load.

Batteries decay with time. Batteries usually reach their specified capacity after several discharge/recharge cycles when new. Batteries will exhibit different life performance dependent on discharge rate depth and number of times actually used. Batteries are extremely sensitive to average operating ambient temperature and worst case extremes of temperature. Batteries used in strings will decay at different rates.

Advance has to make an evaluation of the operating conditions and expected service before selecting cells for a particular service.

Our recommendation is that any particular battery pack should be [tested](#) at installation for satisfactory performance.

Several discharge cycles may be needed to prove that the batteries can deliver the required autonomy (and some margin) if the batteries are new. The normal practice is to time the discharge to the low battery alarm for each run. As each successive re-charge occurs the runtime will increase a little and then top out to a best value.

Particular attention should be paid to ensuring that dummy loads really are directly equivalent to the anticipated service load.

Environmental considerations will affect the run time over its life time. Standard Valve Regulated Lead Acid (VRLA) cells are designed for optimum performance at temperatures of 15-25 degrees Celsius. Most manufacturers produce five or ten year life cells. These lifetimes describe expected service life under idle conditions and reasonable cyclic rate.

As a rule of thumb for every five degrees over 25 Celsius the battery life will HALVE. This means that at temperatures above 40 degrees the BEST expected lifetime is 8 months.

At the end of a batteries life it is important to [dispose](#) of it with regard to the local regulations


---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb712 Description Of Operation - Elite UPS

Elite is an on-line Uninterruptible Power System (UPS) with an automatic bypass in case of system fault or overload condition. The input to the UPS incorporates a back feed isolator fuse protection and mains filter.

**Elite idealised functional diagram**

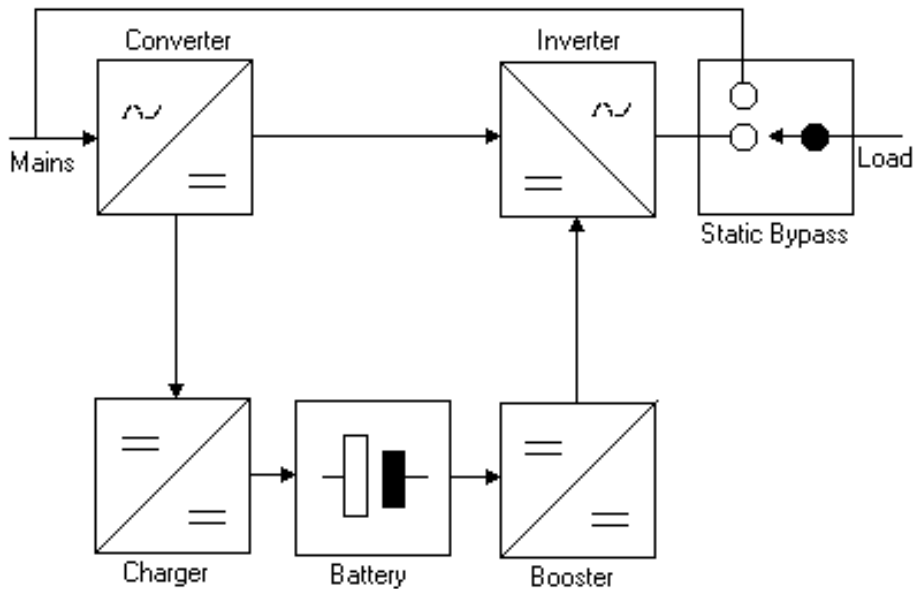

**Mains operation** The filter prevents the UPS from polluting the mains supply with electromagnetic interference generated during normal UPS operation. The output from the filter is fed into the converter.

**Converter** The converter generates two dc voltage levels from the ac mains supply. The first supplies the automatic battery charger.

**Battery charger** The battery charger maintains the dc level of the battery. The output from the battery powers the inverter.

**Battery** The internal battery is a sealed lead acid maintenance free battery. The battery runtime can be increased through the addition of 'Plug And Play' battery extensions.

**Booster** The booster increases the dc voltage of the battery supply to the higher level required by the inverter.

**Inverter** The Inverter draws its dc from either the converter (when mains is present) or the booster and inverts this into an ac electrical supply. A pure sine-wave is generated. The output from the inverter supplies the load through an output filter to remove any electromagnetic interference generated during normal UPS operation.

**Mains failure or poor mains** If the mains fails or the present voltage and/or frequency falls outside the set design parameters of the UPS the microprocessor will automatically direct the constantly running inverter to draw its dc from the battery via the booster.

**Overload or fault condition** The static bypass automatically monitors the output voltage of the UPS. Should an overload condition occur or the UPS develop an internal fault the bypass automatically transfers the load to the mains. The raw mains is filtered by the input and output EMI filters.

**Battery extension packs** The inverter is rated to supply its full rated capacity continuously. Using additional battery extension packs a standard runtime of 10 minutes can be extended to over 7 hours.

**19" Rackmount Option** All models are available in 19" rackmount format with either internal batteries or additional matching battery trays.

**Frequency conversion** The on-line topology of an Elite UPS allows the UPS to perform as a frequency converter 50 to 60Hz and 60 to 50Hz.

**Additional Considerations: Maintenance Bypass** Installation of a maintenance bypass removes the need to power down the load during routine maintenance or capacity upgrade of an Uninterruptible Power System (UPS). A maintenance bypass may be hardwired or 'Plug And Play'.

Other relevant topics The bulletins listed below may also be relevant:

[hb702](#) Why install a maintenance bypass? Warranty periods and emergency calls

[hb708](#) 'Plug and Play' battery packs


---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb713 Description Of Operation - PowerElite UPS

PowerElite is a dual mode Uninterruptible Power System (UPS) with an automatic bypass in case of system fault or overload condition. The input to the UPS incorporates a back feed isolator fuse protection and mains filter.

**PowerElite idealised functional diagram**

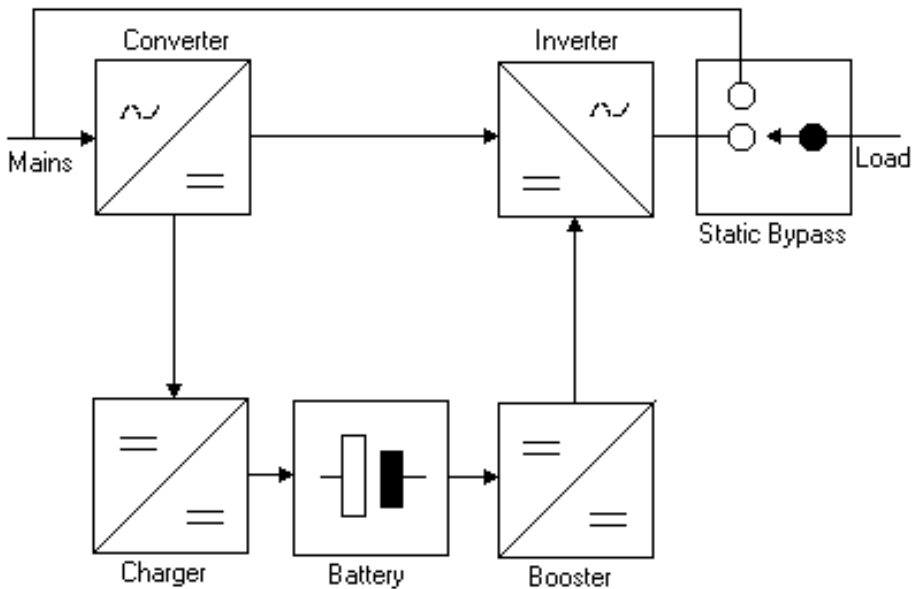

### Mains operation

The filter prevents the UPS from polluting the mains supply with electromagnetic interference generated during normal UPS operation. The output from the filter is fed into the converter.

### Converter

The converter generates two dc voltage levels from the ac mains supply. The first supplies the automatic battery charger.

### Battery charger

The battery charger maintains the dc level of the battery. The output from the battery powers the inverter.

### Battery

The internal battery is a sealed lead acid maintenance free battery. The battery runtime can be increased through the addition of 'Plug And Play' battery extensions.

### Booster

The booster increases the dc voltage of the battery supply to the higher level required by the inverter.

### Inverter

The Inverter draws its dc from either the converter (when mains is present) or the booster and inverts this into an ac electrical supply. A pure sine-wave is generated. The output from the inverter supplies the load through an output filter to remove any electromagnetic interference generated during normal UPS operation.

### Mains failure or poor mains

If the mains fails or the present voltage and/or frequency falls outside the set design parameters of the UPS the microprocessor will automatically direct the constantly running inverter to draw its dc from the battery via the booster.

## Dual mode operation

PowerElite is an on-line double conversion UPS with an economy mode. In economy mode the UPS achieves a 99% efficiency and extremely low running costs.

## Overload or fault condition

The static bypass automatically monitors the output voltage of the UPS. Should an overload condition occur or the UPS develop an internal fault the bypass automatically transfers the load to the mains. The raw mains is filtered by the input and output EMI filters.

## Battery extension packs

The inverter is rated to supply its full rated capacity continuously. Using additional battery extension packs a standard runtime of 10 minutes can be extended to over 7 hours.

## Frequency conversion

The on-line topology of a PowerElite UPS allows the UPS to perform as a frequency converter 50 to 60Hz and 60 to 50Hz.

## Additional Considerations: Maintenance Bypass

Installation of a maintenance bypass removes the need to power down the load during routine maintenance or capacity upgrade of an Uninterruptible Power System (UPS). A maintenance bypass may be hardwired or 'Plug And Play'.

## Other relevant topics

The bulletins listed below may also be relevant:

[hb702](#) Why install a maintenance bypass?


[hb708](#) 'Plug and Play' battery packs

## hb714 Description Of Operation - MicroBak UPS

MicroBak is a no-break performance Uninterruptible Power System (UPS) which provides two advantages over some line interactive and some on-line UPS.

1. A full rated inverter section which can be run long term using battery extension packs. 2. A physical barrier between the raw mains supply and the critical load known as Galvanic Isolation. This completely neutralises spikes and electrical noise and also provides protection from nearby lightning strikes.

The input to the UPS incorporates a back feed isolator and fuse protection.

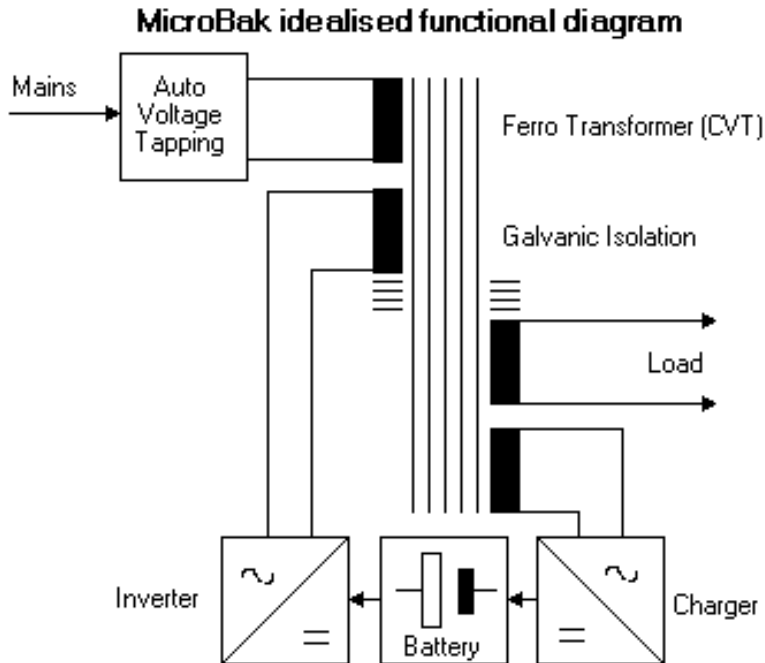

### Mains operation

The filter prevents the UPS from polluting the mains supply with electromagnetic interference generated during normal UPS operation. The output from the filter is fed into the converter.

### Converter

The converter generates two dc voltage levels from the ac mains supply. The first supplies the automatic battery charger.

### Battery charger

The battery charger maintains the dc level of the battery. The output from the battery powers the inverter.

### Battery

The internal battery is a sealed lead acid maintenance free battery. The battery runtime can be increased through the addition of 'Plug And Play' battery extensions.

### Booster

The booster increases the dc voltage of the battery supply to the higher level required by the inverter.

### Inverter

The Inverter draws its dc from either the converter (when mains is present) or the booster and inverts this into an ac

electrical supply. A pure sine-wave is generated. The output from the inverter supplies the load through an output filter to remove any electromagnetic interference generated during normal UPS operation.

## **Mains failure or poor mains**

If the mains fails or the present voltage and/or frequency falls outside the set design parameters of the UPS the microprocessor will automatically direct the constantly running inverter to draw its dc from the battery via the booster.

## **Dual mode operation**

PowerElite is an on-line double conversion UPS with an economy mode. In economy mode the UPS achieves a 99% efficiency and extremely low running costs.

## **Overload or fault condition**

The static bypass automatically monitors the output voltage of the UPS. Should an overload condition occur or the UPS develop an internal fault the bypass automatically transfers the load to the mains. The raw mains is filtered by the input and output EMI filters.

## **Battery extension packs**

The inverter is rated to supply its full rated capacity continuously. Using additional battery extension packs a standard runtime of 10 minutes can be extended to over 7 hours.

## **Frequency conversion**

The on-line topology of a PowerElite UPS allows the UPS to perform as a frequency converter 50 to 60Hz and 60 to 50Hz.

## **Additional Considerations: Maintenance Bypass**

Installation of a maintenance bypass removes the need to power down the load during routine maintenance or capacity upgrade of an Uninterruptible Power System (UPS). A maintenance bypass may be hardwired or 'Plug And Play'.

## **Other relevant topics**

The bulletins listed below may also be relevant:

[hb702](#) Why install a maintenance bypass?


[hb708](#) 'Plug and Play' battery packs



## hb715 Description Of Operation - PC-Power UPS

PC-Power is a line interactive Uninterruptible Power System (UPS). Its primary purpose is to provide a standby source of battery power when the mains fails. The input to the UPS incorporates a back feed isolator fuse protection and a simple mains filter.

**PC-Power idealised functional diagram**

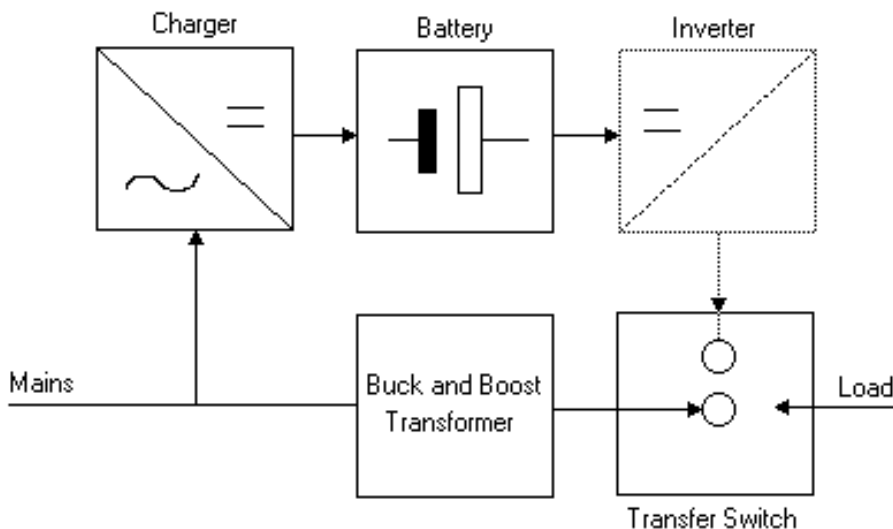

### Mains operation

When mains is present the filter provides basic protection from spikes and electrical noise. The filter 'clips' these disturbances so that the mains problem presented to the load is of a lower amplitude. Spikes and electrical noise of a high amplitude cause the UPS to activate its inverter until either the battery is exhausted or the mains returns to a more normal state. The filtered mains supply feeds the battery charger and 'Buck And Boost' transformer.

### Battery charger

The charger automatically maintains the dc level of the battery.

### Battery

The internal battery is a sealed lead acid maintenance free battery.

### Buck And Boost Transformer

The transformer operates as a stabiliser and allows the UPS to provide a more stable supply to the load over a wide arc voltage window. Inside its design parameters the transformer can reduce the mains voltage (Buck) or increase it (Boost). The output from the transfer is fed through a transfer switch.

### Transfer Switch

The output from the transformer is fed through the transfer switch to the load.

### Mains failure or poor mains

If the mains fails or the present voltage and/or frequency falls outside the set design parameters of the UPS the microprocessor will automatically activate the normally off inverter.

## **Inverter**

The inverter draws a dc supply from the battery and converts this into an ac supply voltage. The inverter generates a trapezoidal approximation to a sine-wave. The inverter output is fed into the transfer switch.

## **Transfer Switch**

Activating the inverter and transfer of supply takes approximately 2-4ms. During this period the load is presented with a short break in supply. The break can affect those loads which are sensitive to short millisecond breaks in supply.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb716 maintenance bypass schematics

## Introduction

There are several types of PowerSwitch bypasses available from Advance

**Manual** simple maintenance switch

**Automatic** reverts to mains if UPS fails

**Dual redundant** for selecting between two in-phase supplies

**Dual redundant used in 'one fault tolerant' mode** for mission crucial applications


**HotSwitch** for selecting between two out-of-phase supplies

Each logical schematic is shown in the 'normal' mode

manual	automatic
<p>s1a and s1b are ganged wipers on a manual switch the switch is MBB (make before break)</p> <p>in bypass mode the UPS may be safely removed from the circuit</p>	<p>s1 is the same as the manual version the relay control detects the output voltage from the UPS. If the UPS output fails the Relay Control operates the two switches which connect the critical load to the mains and the neon lights</p>

## Switches for more critical applications

dual redundant (DRS)	hot switch
Empty space for dual redundant (DRS) schematic	Empty space for hot switch schematic

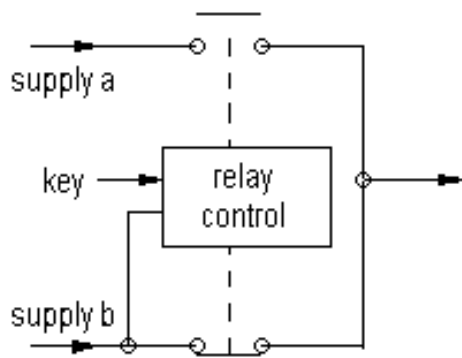

the schematic is per DRS but one supply has some added power conditioning

the HotSwitch permits the use of supplies which are NOT

synchronised

power is supplied from two independant sources which MUST

be in-phase if supply `b' fails the control changes the critical load to supply `a' the keyswitch provides manual changeover

both variations exhibit a small changeover break which will not affect ICT systems

For more details see FBS series and special needs version or bypass considerations

UK: 01978 821 000 Tel: +44 1978 821000 © [AEL Group](#)

## hb718 UPS Planning an installation

The decision making process of selecting an Uninterruptible Power System (UPS) becomes more complex as the UPS increases in capacity and battery support time. The following provides a simple check list of the items which should be considered:

### UPS selection and ordering

Before ordering the UPS it is always worthwhile to ensure that the calculated load in VA and Watts (W) can be supported by the UPS. Advance recommend that a UPS is always sized to allow for a 25% increase in load expansion.

Further considerations should be applied to UPS installations with long battery support times. In such instances it may be necessary to up rate the UPS charger or add extra chargers to maintain a reasonable battery recharge time. A choice between 5 year and 10 year design life batteries may also be available. Every effort is made to ensure that UPS deliveries are to customer agreed delivery dates. However the dynamic nature of the business and the length of time that can elapse between quotation and order placement means that users should always check on the current lead time prior to order.

### UPS environment

A UPS generates heat and noise. This varies with the UPS technology employed.

In confined areas and/or areas where air conditioning is employed customers should assess the impact of the UPS on current ambient temperatures. High ambient temperatures reduce [battery](#) design life. High humidity can cause component corrosion and reduce design life. Extra ventilation or increased air conditioning may be required. The noise level generated by the UPS is always relative to the environment. In confined populated areas it may be necessary to consider siting the UPS in a separate room or installing a low noise generating UPS technology. A UPS normally uses fans to provide cooling to the internal components within the UPS. In rooms without sealed floors or dusty industrial environments dust may be drawn into the UPS by the internal fans. This can cause the fans to fail early. In such environments it may be necessary to either 'cure' the floor or install dust filters on the UPS air intakes.

In environments where safety sprinkler systems are fitted it is recommended that the UPS is not sited near the sprinklers and/or that drip trays are fitted above the UPS.

### Maintenance plans

A UPS represents a significant investment for any organisation. It should be adequately maintained and supported to ensure it continues to provide stable and secure operation. Advance offers a range of extended warranties and maintenance plans.

### Other relevant topics

The bulletins listed below may also be relevant to this topic.

[Delivery and site](#) considerations.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb719 bypass schematic - 3 position




This set of pictures shows the functional arrangement of Advance 3 position bypass switches as used with UPS systems

The bypass switch must be correctly sized in terms of current capacity (Amps) for the UPS

Installers should be aware that the bypass must be installed in compliance with all relevant codes.

The input, UPS and output EARTH connections to the switch must ALL be made and tested for continuity

In normal use the switch is switched to `NORMAL' which provides the critical load with UPS protection. When the UPS is to be tested, the critical load is operated from the main supply via the bypass switch in the `TEST' position. When the UPS is to be disconnected, the switch is put in the `BYPASS' position

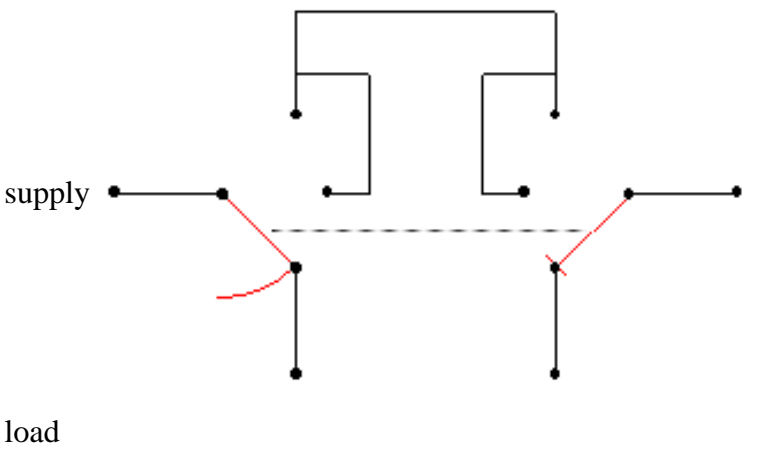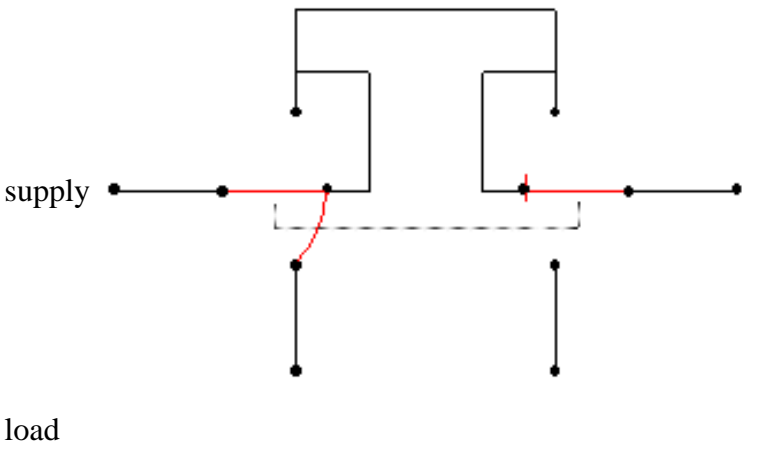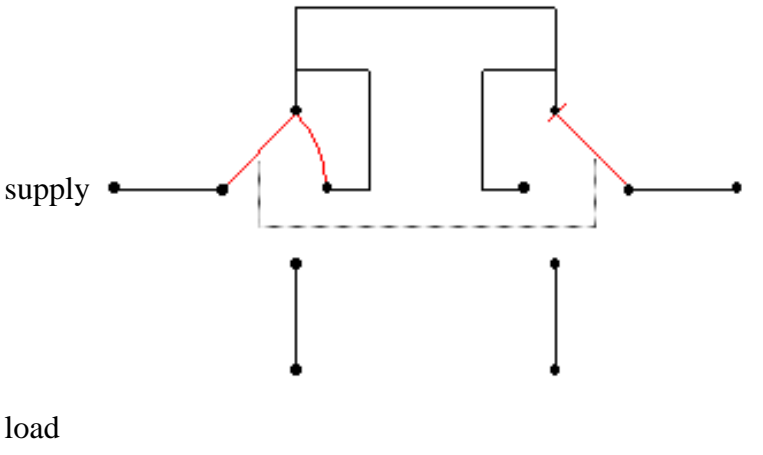switch position	connections	diagram
NORMAL	supply to UPS input and UPS supplies output	 <p>The diagram shows a three-position bypass switch. In the NORMAL position, the supply is connected to the UPS input, and the UPS supplies the output. The bypass switch is in the middle position, routing power from the UPS to the load.</p>
UPS & BYPASS (older units TEST)	supply to UPS input and supply to load	 <p>The diagram shows a three-position bypass switch. In the UPS &amp; BYPASS position, the supply is connected to both the UPS input and the load. The bypass switch is in the middle position, routing power from the supply to the load.</p>
BYPASS	supply to load via switch UPS isolated	 <p>The diagram shows a three-position bypass switch. In the BYPASS position, the supply is connected to the load via the bypass switch. The UPS is isolated.</p>

Switch type	Switched connections
Single phase	Live and neutral
Three phase	L1,L2,L3 and neutral

These notes are provided to assist trained electricians in the principle of operation and are not intended for use by unskilled personnel

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## **hb720 UPS Monitoring and remote interfacing**

Modern Uninterruptible Power System (UPS) installations normally include some form of remote UPS monitoring and control.

The communication method may rely on RS232 communications or simple volt-free contact signals.

### **RS232 communications**

This communication method provides access to the 'intelligent' microprocessor features of the UPS.

As well as warning when the UPS changes operating condition it can also provide a wealth of operating information. The communication method requires a cable connection between the UPS and the remote computer system. The remote computer system can be by the side of the UPS in the next room building or on the other side of the world. To access the UPS and achieve communications the computer system requires a version of the UPS monitoring and control package PowerShield compatible with its operating platform e.g. Windows Novell Unix etc.

### **PowerShield software**

PowerShield is supplied on a CD-ROM. The software package contains versions of PowerShield for the various Advance UPS and major operation systems. The software package allows the user to interrogate the UPS and retrieve current real time information store historical information for further analysis and instigate self test routines. The software package can also be configured to close down the computer system in an orderly manner when the UPS approaches a low battery condition. Advance can offer cables manufactured to specific custom requirements.

### **Multiple communications**

Advance supply a range of Multi User Interfaces (MUIs) to allow a single Advance UPS to communicate with multiple operating platforms.

A single cable connects the UPS to the MUI. The MUI is connected to each protected computer system. A version of PowerShield is installed on each computer system.

### **SNMP - Simple Network Management Protocol**

PowerShield also provides SNMP protocols and Management Information Bases (MIBs) to allow the UPS to become a network managed node on the network.

### **Volt-free contact signals**

This is the traditional form of communication commonly used by basic UPS monitoring and shutdown packages such as PowerMon. Signal contacts provide a low dc voltage when the UPS changes operating condition. Contacts are normally provided for mains fail battery low and UPS alarm. The volt-free contact method of communication allows a UPS to be interfaced into a Building Management System (BMS) or other security alarm monitoring system. Advance can offer cables manufactured to specific custom requirements.

### **Emergency power off (EPO)**

Advance UPS normally incorporate an EPO. shutdown contact.

This allows the UPS to be connected into a central EPO. switch for emergency shutdown. Advance can offer cables manufactured to specific custom requirements.

### **Remote Modem Interface**

Both the RS232 and volt-free contact communication methods can be used to provide remote indication of alarms



conditions.

Only the RS232 method allows two-way communication and access to the 'intelligent' microprocessor features. Certain Advance UPS can also be programmed to dial up pagers when an alarm condition occurs. For each UPS with this facility please check which make and version of modem Advance recommend.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## **hb721 UPS mission critical installations**

Installing an Uninterruptible Power System (UPS) can demand more than simply finding a space large enough in which to site it. For critical installations special considerations need to be given to the following areas:

### **Alarm Reporting**

If the UPS is to be installed in a secure access room basement or confined environment consideration must be given to monitoring of the UPS' status and alarms.

Most UPS incorporate some form of system and battery testing to warn of potential problems prior to a system failure. A UPS may seem to be performing normally but if the battery is very old it may only be capable of supplying 10% of its originally installed capacity when new. The UPS will have raised an alarm condition that the battery needs to be checked or replaced but this will be ignored if no remote monitoring is installed. A further complication can arise where the UPS has an automatic system bypass. In this case the UPS may have failed due to a system overload or fault condition. The load will have been automatically transferred to an unprotected mains supply. To the UPS users the system will appear normal but the load will be at risk. In either scenario only a mains failure highlights the fact that the UPS was actually in an alarm condition and was unable to support the load. It may have been operating for weeks in a near-to-fail or failed state. For critical applications the solution is to make use of the built-in communications port on the UPS. This normally provides both RS232 communications and signal contacts. It allows the UPS to report changes in its operating status to a Building Management System (BMS) remote status panel or Local Area Network (LAN). Failure to monitor the state of the UPS or to take advantage of automatic system and alarm reporting will seriously undermine the integrity of the UPS.

### **Ambient Temperature**

Most UPS datasheets indicate that the UPS can work in ambient environments which range between 0 and 40°C.

Such high ambients can occur when the UPS is installed in a control panel or a small unventilated room. In such environments reliability problems will occur. Most UPS will only work up to 40°C for short periods. If the UPS has not been designed and manufactured to work continuously inside such a temperature range users should assume that the actual expected ambient is nearer 25°C. At higher ambients the UPS will almost certainly alarm and may shut itself down automatically to protect itself. Ambients above 25°C will also dramatically reduce battery life by as much as 90%. For high ambient environments either choose a UPS designed for long term high ambient use or install forced air cooling.

### **Automatic System Bypass**

On-line UPS have an automatic bypass. This is a safety feature which allows the UPS to fail safely to mains without disrupting the supply to the load.

Such a transfer will occur when the UPS is overloaded to the extent that it cannot supply the requested capacity or it develops an internal fault condition. The load sees no break during the transfer.

### **Parallel Redundancy**

The integrity of an on-line UPS installation can be further enhanced by installing two UPS in a parallel redundant configuration.

In such a scenario each UPS is capable of supporting the full load should one of the UPS fail.

### **External Maintenance Bypass**

A maintenance bypass allows the UPS to be manually bypassed.

When activated the load is transferred from the output of the UPS to the raw mains. The load sees no break during the transfer from UPS to mains and vice versa. The process allows the UPS to be isolated for maintenance or simply swapped out. Whilst some UPS have a maintenance bypass built-into their design an external wall mounted bypass is more

practical. An external maintenance bypass allows the UPS to be fully isolated and switched off. It also allows the UPS to be physically replaced without disruption of supply to the load.

### **External Maintenance Bypass Supply Conditioning**

When powered through an external maintenance bypass the load is not protected from mains disturbances. Such a scenario can last for several hours.

The solution is to install a power conditioner in the external maintenance bypass circuit. Whilst a power conditioner cannot protect the load from a complete mains failure it can be specified to provide Galvanic Isolation and/or mains voltage regulation.

### **Line connection**

Care should be taken to ensure supplies do not share common fuses.

### **Load Connection**

Where a UPS powers a dedicated circuit some consideration should be given on how to control and restrict access to socket outlets on the circuit.

Without restricted access loads may be connected to the UPS which cause an overload and failure of the UPS. Access can be restricted through the installation of specially designed plugs and sockets colour coding and clear warning labels.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb724 sources of spikes

Spikes cause untold damage on modern electronic equipment. This page addresses some of the sources of spikes and their expected size.

### Human beings

We have all experienced the effect of combing our hair using a plastic comb. The hair can become charged and because like charges repel the hair tends to 'stand on end'. If the hair is vigorously combed in the dark under ideal conditions significant sparks will be seen.

Similar effects can be felt when walking over plastic carpet and then touching a grounded object such as a door handle or lift button.

This effect is caused by the generation and retention of static charge on the body. As far as we know it is harmless to human beings if a little surprising occasionally.

Because our sister company Arbra Instruments supplies the mining industry we are aware of some useful technical data which relates to the build up of static charge on human beings. To avoid standard explosive detonators from being triggered by static charges a standard test is performed. A 300pF capacitor is charge to 15kV. The capacitor is then discharged into the detonator 10 separate times. The detonator must reliably NOT fire!

These figures give us a useful baseline for the expected energy we can get from a human with plastic clothes or environment.

### Lightning

The UK experiences about 200 000 lightning strikes per annum. This is about 2 per square mile on average. However telecomms aerials and electricity distribution pylons probably collect far more than an average share.

A typical 200kV strike will result in a slow 3kV spike (when more than 1/2 mile from point of contact) travelling down copper wires towards sensitive equipment.

In Europe isolating transformers are usually homologated to 4kV.

In an indoor 230Vac environment the wiring will flash over at about 6kV. This effectively limits the amplitude of spikes in an office or household wiring system. In outdoor situations this may increase to 10 or even 20kV.

### Applicable standards

European test standards are defined in IEC 61000 and USA ones in IEEE587. The USA also uses ANSI/IEEE C62.41 which is similar to BS6651.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb725 UPS overloads

## Introduction

Modern UPS products are designed to cope with overloads.

An overload can take one of several forms and current electronic solutions to limit system damage are based on simple principles.

The UPS is being overloaded if the load power demand is greater than the rating of the UPS.

## The problem

An overload may happen quickly or slowly increase above the rating of the UPS. Inside the UPS there are current switching devices which can cope with minor overloads for a considerable time until they become too hot. These switches will be damaged almost instantaneously by currents way in excess of their rating.

It is commonplace to find overloads of 125% or 150% of rating being allowed by the electronics for some seconds or even minutes. However larger overloads for example 10x rating require faster action by the electronics.

Most users do not realise that some modern electronic power supplies take large currents when first powered up. It is not unusual for a small computer such as a PC controlling a process plant to be on 24/7. The operator may well choose to switch off the monitor during the night when no-one is looking at it - either to save power or increase monitor life.

In the morning when the operator returns and switches on the monitor which normally consumes only about 50 watts the switch on surge has a power equivalent of maybe 10000 watts albeit only for one thousandth of a second.

## The solution

This load would typically destroy the UPS and the normal solution is to detect the overload and divert it around the UPS. This is achieved entirely automatically by a small switch which quickly connects the load directly back to the mains until the overload disappears. This switch is called a 'bypass'.

## Application difficulties

So far so good. The UPS happily protects itself and each morning when the monitor is switched on momentarily switches the load back to mains and reverts to the battery supply a very short time later.

During a power outage this option becomes unavailable. The UPS must NOT be overloaded during battery operation when the mains is not present. If an overload occurs the UPS will protect itself and sadly drop the critical load because it has no power source for the overload.

This problem can really only be managed by knowledge and discipline unless further investment is made (which is usually quite substantial) to overcome it.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

# hb726 UPS bypass considerations

## Introduction

Most users do not appreciate that there are several [different kinds](#) of UPS bypass. This note describes some of the variations and highlights a common application problem.

## The variations

Line interactive UPS usually just sit and wait for the mains power to go away and when it happens switch the critical load to the battery supply. This means that [overloads](#) are supplied by the mains.

On more sophisticated products the critical load is supported by the battery and an internal bypass arrangement connects the load to the mains for switch-on overload problems.

Advance also recommends that an extra external manual bypass switch be installed to permit operation of the critical load during UPS maintenance.

On large UPS items (say 5kVA and above) it is quite common to find a maintenance bypass built into the unit. This is used for testing and permits some system flexibility when doing battery tests etc. However we still recommend the use of an external bypass.

## Application difficulties

If the UPS is to automatically switch the critical load from bypass mains to battery supply then the two sources must be in phase. If the mains supply has been interrupted the battery supply cannot know how to synchronise with the mains because it is not present. If the maintenance bypass switch is operated during battery operation the critical load may see a supply which in the worst case can see a complete phase reversal. This is almost guaranteed to cause the load to be disrupted.

## The solution

This problem is solved by ensuring that only trained personnel operate a manual bypass switch. Advance always labels manual bypass switch boxes with a warning not to operate it when the mains has failed.

It is important that responsible users differentiate between normal battery operation where the inverter and mains are synchronised and the special case where the UPS is providing stand alone power.

## Improving reliability in plug 'n play installations

Almost all of the newer plug 'n play bypass boxes permit the entire UPS and maintenance bypass switch to be operated from a single outlet. We recommend that consideration is given to connecting the UPS mains supply and maintenance bypass switch to different in phase

supplies. Ideally this is just a double 13A socket with one feeding the UPS and the other the bypass switch. With this arrangement the critical load is no longer dependent on a single fuse. See also our pages on [mission critical](#) mission crucial and bypass [schematics](#)

# hb727 UPS battery testing

## Introduction

as the UK's premier supplier of extended runtime packs for telecommunications environments Advance recognises that there are thousands of batteries installed in the UK with little if any 'intelligent' monitoring facility.

## Battery Testing

This service provides for on-site testing during normal working hours to assess and then report on the general suitability of the battery set to perform

Testing is based on a four part approach

- Impedance testing
- Load testing
- Temperature logging
- Expert visual inspection

Impedance testing is now generally accepted as the best method of determining the condition of standby battery systems. We use the Bitbox model 5

which allows us to check for

Individual cell	Condition
Total battery	Capacity
Remaining reliable operational	Life
Action required to maintain operating	Performance

We would be pleased to quote for testing a particular battery pack arrangement

---


UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb730 UPS Series/Parallel redundancy

### UPS Configurations


#### Series Redundancy

If redundancy is required then the two UPS's must both be capable of supporting the entire load. They are then wired with one feeding the bypass of the other. If first unit fails it drops back to bypass transferring the load to the second unit. No additional boards are required. In the event of both units failing load is dropped back to raw mains.

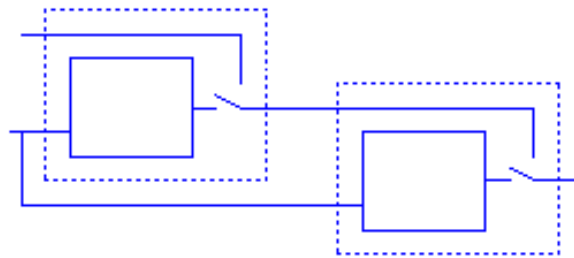

#### Parallel working

Used to increase the load capability of a UPS system therefore if you parallel up two 60kVA units you can support a load of 120kVA although in practice you get slightly more power out of two units in parallel than a single unit of the same size. Each UPS requires a 'parallel' interface board fitting. If one of the units fail the load will be dropped back to bypass as they are in effect working as a single unit.

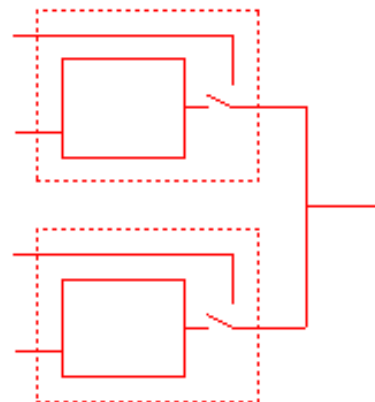

#### Parallel Redundancy

Parallel redundancy tends to be used mostly in dc systems where you only require the addition of a blocking diode to achieve isolation of the two or more units and there is no bypass. Again both units must be capable of supporting the full load but they are wired in parallel and if one unit fails the other takes the full load. This is achieved by either a master/slave configuration where the one unit is in standby mode and is only switched in when the master unit fails or by current sharing which requires expensive electronics or transformers.

(

MasterElite will operate in parallel up to a maximum of 6 units but not work in a parallel redundant configuration

.)

#### Battery sharing

Where two or more UPS share the same battery bank to reduce cost or because customer has large dc supply of the right voltage available. In a series redundant configuration the same cost reduction can be achieved by each UPS having batteries for half the required run time. As long as both UPS are working the full run time is achieved when the first unit switches to bypass on flat battery transferring the load to the second unit. The only disadvantage with this configuration is that if one unit has failed and there is a power failure there will only be half the required run time available. If both units have batteries capable of the full required run time and both units are working you will actually get twice the required run time. MasterElite will only work in a battery sharing configuration when fitted with parallel boards.

#### N+1

This is a form of redundancy where you use the number of units to achieve full load capability plus one extra so that a single unit can fail and be removed while the remaining still support the full load. If the required load is 60kVA being supplied by three 20kVA units you actually use four units. Series redundancy complies with this as long as the load requirement is supported by one of the ups. Parallel redundancy/N+1 are more common in dc systems as it is easier and



cheaper to achieve with dc units and they do not usually have a bypass arrangement to fall back on. The simplest form of N+1 is using two units in a load sharing capacity where the total load is less than the maximum load of an individual unit - this is called Dual redundancy.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb732 UPS Health and Safety information

Please note the following recommendations and guidelines for the safe operation of your Advance UPS.

(a) All maintenance and service functions must be performed by authorised personnel. The UPS contains several internal power sources which can be hazardous.

(b) The internal battery can generate an electric shock. All batteries removed from the UPS for replacement must be disposed of according to the current health and safety regulations.

(c) The UPS contains its own energy source (*the battery*). The output connection may be live even when the UPS is not connected to a power source.

(d) The UPS generates approximately 1mA of leakage current. To ensure a safe maximum limit of 3.5mA limit the total leakage current of the loads to a maximum of 2.5mA. Should the load leakage current be over this limit a qualified electrician should install the UPS in compliance with IEC 309.

(e) In emergencies remove the fuse from the supply spur or switch off the MCB feeding the UPS and then turn off the UPS batteries using the rear ON/OFF switch.

(extracted from Elite UPS installation manual)

**DO NOT throw batteries into a fire: they might explode.**

**DO NOT attempt to open the batteries: they are sealed lead acid maintenance-free. The acid electrolyte can harm unprotected skin and eyes.**

**DO NOT operate the UPS if it appears to be leaking battery electrolyte or if a dry white power residue is present on the batteries.**

**DO NOT allow water near the UPS.**

**DO NOT place a foreign object inside the UPS.**

## hb734 reprogramming a MicroBak

The workhorse UPS family known as MicroBak can be programmed in a number of different ways.

Any simple terminal emulator program can be connected to the UPS using the following set-up information:

8bit one stop no parity and 9600 baud

the pin connections are RS232 standard ie 2 3 5 on D9 and 2 3 7 on D25

Once the terminal is set up and communicating enter FAO which should provide an `S' prompt.

To make the normal on-site de-sensitising settings use

SET GLITCHES TO nnn (max 300)

SET SLEW-RATE TO nnn (max 25)

SET FTRACK TO nnn (max 10)

RECALC

entering `RECALC' should take you back to the standard prompt and ensure changes are stored

For detailed information see the appropriate manual.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb735 UPS power factor considerations

### Sinusoidal or not?

The traditional approach to power factor leaves some gaps when reviewing modern power systems.

Most mature engineers think of power factor in terms of phase shift. This is because before modern switched mode power supplies became commonplace in electronic systems most non-unity power factor loads were inductive. Typically these loads might be a transformer or electric motor. In a simple electric motor being run in a normal fashion at full speed one expects to see a lagging power factor of around 0.8. The current is distinctly out of phase with the supplied voltage but it is sinusoidal

In the case of a modern computer file-server or telephone switch the power factor is often quoted around 0.75 suggesting that the power consideration is identical. However it is NOT. In the case of a SMPS based load the watts:VA

ratio is caused by harmonics in the current NOT phase shift. The load current will be 'peaky' (have a high crest factor) and anything but sinusoidal.

In choosing a UPS and planning a power distribution system the power factor consideration is an essential term in the overall equation.

### Rule 1: $PF = \text{watts}/VA$

Using old UPS systems when the load was sinusoidal and had a lagging power factor allowed some economies in the design. A 10kVA motor rated at 0.8PF would only take 8kW. This means that the UPS battery and charge requires only to supply 8kW + re-charging current for the autonomy time. This led to UPS products being supplied with apparently quite small chargers to save cost.

In old UPS designs where the output stage was low frequency an output capacitor was sometimes added to effectively 'power factor correct' the load. This permitted the designer to allow for only 8kW in the inverter again saving cost.

If we move onto SMPS loads this type of UPS is at a significant disadvantage because the capacitor now makes the situation even worse. The correcting capacitor adds to the apparent load seen by the UPS. The use of a SMPS causes a much larger UPS to be required. However it is true that the SMPS exhibits a non-unity PF (unless it is internally corrected) in that the VA is greater than the watts consumed. The battery can still be sized for the watts.

### Today

In modern UPS boxes the designer is aware of a lot of these problems and the UPS is usually designed to accommodate large peak currents which occur at every cycle in the waveform. Current limiting to protect the UPS is usually vested in switching to bypass earlier than is necessary to maintain some thermal margins. However with microprocessor controlled inverters the output stage can have several different overload checks - any one of which will activate protection. For example output switch heatsink temperature actual peak current integrated current over time and many other solutions.

### The method

When it comes to planning an installation there is a simple approach which although not entirely exhaustive provides a sensible way to size the UPS.

The user should add up all the actual RMS currents being used in the system together with any expected expansion. (We propose 30% is a good starting point for an expansion term). Do NOT use fuse ratings of equipment which bear little relation to the actual current required. Assume all the load is unity power factor

. This is nearly a worst case. The UPS is usually quoted with a power factor rating use this to identify its wattage rating and select a unit where the wattage exceeds the estimate above. Get the supplier to calculate the battery run time based on

the actual watts of load.

If you would like any more help on this subject please ask!

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb738 MicroBak performance

The workhorse UPS family known as MicroBak can be used to provide power to any suitably rated electronic load

Since the unit contains a voltage stabilising transformer when connected either to the main supply or the battery, some questions about voltage stability arise which are not described on the data sheet

For a typical 5kVA unit operating with 276Vac input the output voltage at full load (5kVA @ 0.7PF) is 246Vac (which is = 240 + 2.5%)

At 140Vac input the output drops to 237Vac (which is = 240 - 1.25%)

Operating on battery the unit delivers 243Vac from a fully charged battery under the same load conditions (which is = 240 + 2.5%) - the voltage drops to 240Vac at end of battery discharge

For detailed information see the appropriate manual

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)


# hb754 automatic bypass for use in special needs situations

## Introduction

This unit provides an inexpensive solution which is very reliable when selecting between two supplies. Based on well known electrical components with no electronics this system has been evolved by a hospital customer for the operating theatre environment. The small supply break may mean some equipment has to be re-booted but the lights and other essentials just flicker briefly.

## Schematic

Suggested arrangement shows prime components for it 'MUST WORK' supply.

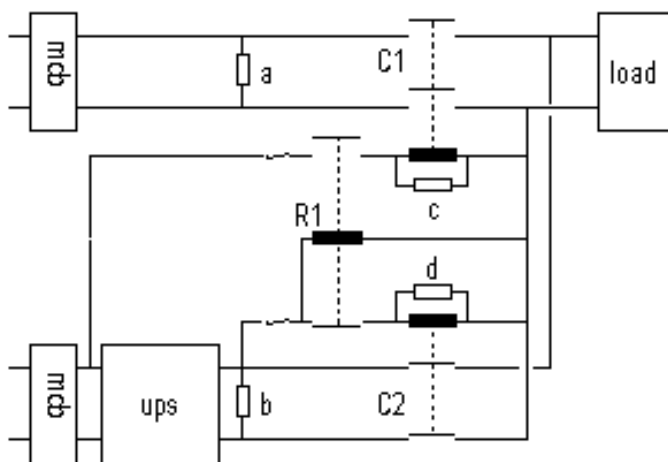

The mains supply is provided via MCBs to both the bypass and UPS. In the normal state the UPS is protecting the load and R1 is energised. If the output of the UPS fails for any reason R1 will drop out and operate the mechanically interlocked contactors C1 + C2. If either fuse blows or R1 fails the system will drop out to bypass because the rest state of C1 + C2 is 'on bypass'.

Of course the UPS will buffer the load from breaks in the input supply.

There will be a small break in the transfer but the system is extremely robust and uses readily available components.

The four neons a b c d indicate status.

If you would like a bespoke unit making up for a particular application - let us know so we can quote you.

A unit suitable for 30Amp single phase is about 12" cube.

UK: 01978 821 000

Tel: +44 1978 821000 © [AEL Group](http://www.aelgroup.com)

## hb756 Generators driving UPS

Sophisticated ICT systems sometimes use local engine driven generators for backup in case of mains failure

Some modern small UPS boxes are designed to operate primarily from traditional mains supplies and some care should be taken when operating them from a small generator

These notes provide some guidance on the potential problems which can be met together with suggested practice

### Size of generator

The average modern UPS need a much larger generator than one might expect. Allowance must be made for re-charging the batteries as well as providing full load and the effects of UPS efficiency.

Typically Advance recommends a generator capable of delivering at least TWICE the output power of the UPS however some generator manufacturers quote unrealistic performance specifications and it is best to check with our engineering team.

In addition some UPS input circuits have high crest factors and generator control circuits cannot handle them.

The Master Elite range of UPS has a specially developed input filter for use with generators and other sensitive sources.

### Neutral

Some generators do not refer the low side of the output to earth. This MUST be 'tied down' to avoid possible damage to the UPS

Care must also be taken that the generator neutral is connected to the UPS input 'low'

Conventional mains phasing is expected by the UPS and the generator should be wired through to the UPS input in the normal way

### Frequency

The generator must run close to 50 Hz for the unit to operate correctly if the frequency goes outside the UPS operating window it will operate from the UPS battery which will not be re-charged

### Electrical noise

Some medium sized generators may be connected to other loads. In this case care must be taken to ensure that the other loads do not create excessive spikes or other electrical noise

The generator exhibits a much higher impedance than a conventional mains supply. Noise from triac controlled motors etc. may affect the UPS rather than just disappear in the distribution system

Clearly any generator which is not brushless may also cause a similar problem

A generator providing a clean waveform with a reasonably stable frequency and voltage correctly connected only to the UPS is the most attractive arrangement

### Safety

Some thought needs to be given to the Regulations regarding out of phase supplies in the same work area



# hb757 earth leakage current with UPS

## Introduction

When electrical equipment is connected to people for example in a medical application extra regulations apply.

Such regulations are designed to ensure that a patient cannot be harmed by a fault in the electrical supply.

Specific details for patient connect equipment are outlined in IEC 601 / EN 50601

## UPS measurements

Customers with UPS equipment may test the equipment using off the shelf testers to ensure it is safe in person-connected situations or where the general integrity of the equipment is being checked.

We have found instances where the test results are confusing because the test equipment performs an earth leakage measurement between Live and Neutral and also between Neutral and Live.

The reversal of the input connections can give rise to unexpected results.

Our UPS products are designed and manufactured to meet the EMC requirements of current legislation. In normal use the live and neutral supplies are connected the 'right' way around. To meet the regulations the input filtering may not be symmetrical about the two input wires and earth.

For example a capacitor connected between live and earth will see about 230Vac and a similar sized capacitor fitted between neutral and earth will normally see less than 10Vac. If these are checked at 50Hz for leakage current the results will be different by more than an order of magnitude.

So an off the shelf tester measuring the combined effect of several such components will see different results for earth leakage depending on the polarity of the test.


Recent calculations on the input filter fitted to a 1kVA MicroBak showed expected figures of 41 and 759 micro amps. Actual measurements provided figures of 75 and 800 micro amps.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb758 Environment recommendations for your power centre

1. Do ensure that ventilation or air conditioning is sufficient to cope with heat dissipated by the UPS (and by any other heat sources in the UPS room), and is capable of maintaining the UPS and battery within recommended temperature and humidity conditions.
2. Do keep UPS room temperature between 20°C and 25°C to ensure optimum battery performance and life.
3. Do carry out battery discharge tests every 6 to 12 months.
4. Do ensure electrical protection of supplies to the UPS are in accordance with Advance recommendations.
5. Do provide adequate clearance around the UPS for ventilation and maintenance access.
6. Do keep the UPS and battery rooms clean at all times.
7. Do seal floors, walls etc. as necessary to prevent the creation of dust which could be drawn into the UPS.
8. Do keep the UPS regularly maintained. Advance offers Maintenance Contracts, Spares Kits and specialised training courses both for operators and for maintenance technicians.

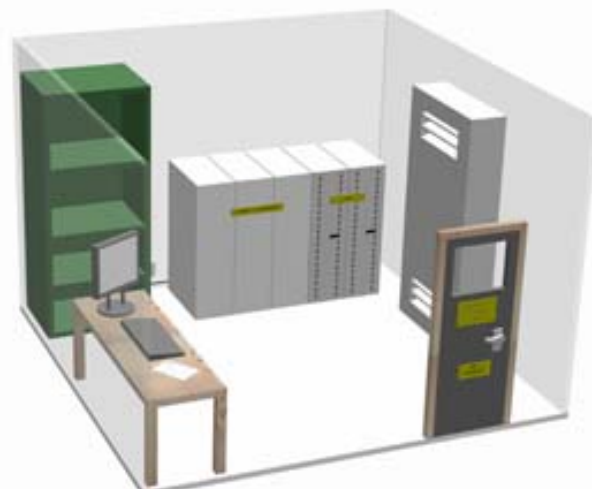

1. Don't permit smoking or naked lights in the vicinity of lead acid batteries.
2. Don't allow access to the UPS and battery rooms to unauthorised personnel.
3. Don't use the UPS and battery rooms for storage.
4. Don't restrict the ventilation air flow into and out of the UPS.
5. Don't position water pipes or sprinkler system outlets above the UPS, otherwise fit adequate drip trays.
6. Don't allow building or electrical work to be carried out in the UPS or battery rooms whilst the equipment is energised. Always transfer the UPS to manual bypass, switch off, isolate batteries and cover the equipment whilst such work is being done. Thoroughly clean the room before re-energising the UPS.
7. Don't smoke or use corrosive materials in the vicinity of the UPS, and don't allow such materials to be introduced into the UPS room via air conditioning or ventilation equipment.



---


UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb764 UPS fed from two sub stations

### Introduction

The need for supply options when planning UPS installations is dependent on local needs. Sometimes it is desirable to provide supply switching so that alternate sources may be used. When the supplies are out of phase care must be taken when connecting the UPS. If separate sub-stations supplies are used then isolation **MUST** be provided. (This is because the UPS usually has the bypass and mains input connections commoned at the neutral terminal inside the UPS).

### Schematic

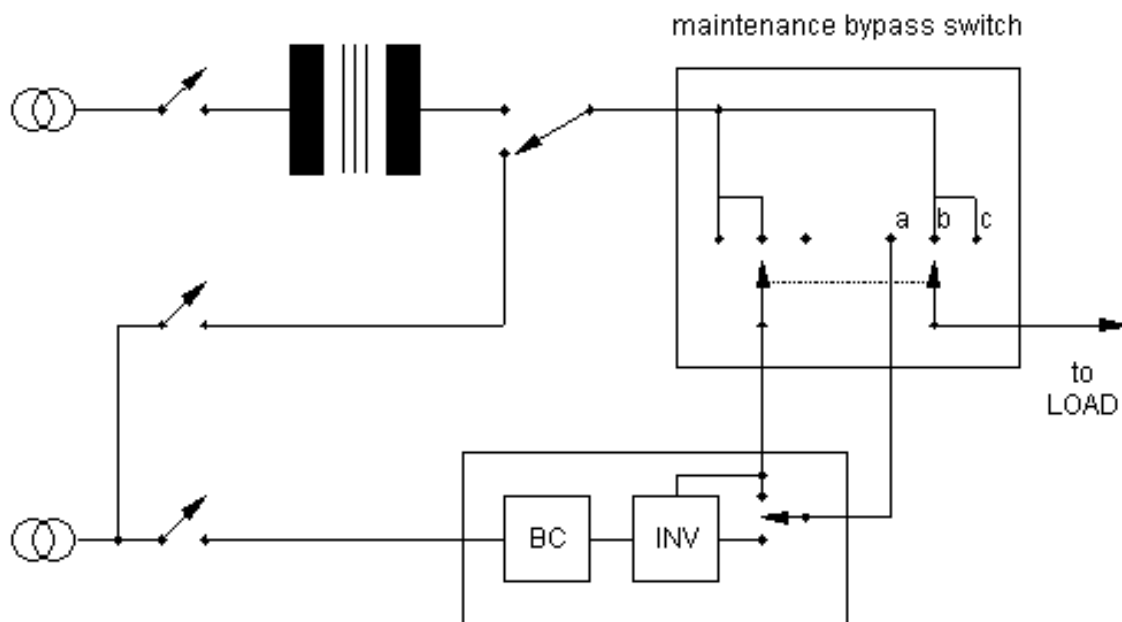

The suggested arrangement shows prime components for two sources with essential isolating transformer when two sub-station transformers are available. This arrangement permits the load to run from either supply if the UPS is out of service. Care must be taken to ensure that switch type wiring and position cannot be unsafe.

The transformer may sometimes be better placed in the UPS supply so that its size is determined by the UPS full load needs not the possible bypass power requirement.

### Bypass switches

Some types of bypass switch require care and attention when operated. Particular care must be taken to ensure that a UPS is in-phase with the bypass line before reconnecting the load. If in doubt check before use

### Further options

We also supply a special [bypass switch](#) which permits two out of phase supplies to be used

## **hb805 Automatic Battery Test Elite range**

### **ETC range 700 and 1kVA**

Automatic battery testing occurs every 40 hours (excluding time spent with the battery not fully charged).

The test consists of disconnecting the mains momentarily the microprocessor then measures the load and detects the volt drop across the batteries and from this calculates the battery efficiency. If the battery efficiency is calculated as below 50% the "Replace battery" alarm is activated on the front panel and an audible warning is started.

### **ETA range 700-3kVA and ETD range 1K5VA-5kVA**

Automatic battery testing occurs every 40 hours (excluding time spent with the battery not fully charged).

The test consists of connecting the batteries to an internal load (approximately 30A) for 1ms. Knowing the Ah and detecting the volt drop across the batteries this figure is compared against a table in the microprocessor memory. An audible alarm and front panel warning are activated if the volt drop is too great.

### **ERM ERT ERX Master Elite range 6kVA-120kVA**

Automatic battery testing occurs every 24 hours. The test decreases the rectifier voltage to 350V for 6 sec to supply the load from the battery.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb806 Parallel Operation Master Elite range

### Scope

This document describes the parallel card option available to the Master Elite range of products. Parallel operation can be used to provide redundancy in a UPS system or to increase the maximum capacity. Because the parallel option is an addition to the standard product it can be retro-fitted by a trained engineer in addition the unit can be ordered "parallel ready" but not enabled to reduce system downtime when a second unit is installed.

### Description

Between two and six UPS can be connected with parallel input and output connections and configured to behave as one larger system. In the 100-120kVA versions units in a parallel system can share one battery bank.

System data is communicated using an opto-isolated "daisy-chain" cable. The cable transmits up to 5 signals from from the "master" unit to it's "slaves".

Systems made up of Master Elites up to 80kVA require each unit has its own battery bank.


### Requirements

Each UPS must be fitted with its own parallel card option this can be disabled using a special terminator if it has been fitted for future expansion. Special care must be taken in installing the UPS power cabling to ensure all units have the same length of cables.

Redundancy can only be achieved by fitting one UPS extra to those required by the load requirement. It is recommended that isolators are fitted at the input output and battery input for each UPS to allow ease of maintenance.

The daisy-chain cable must be well protected any break in this communication will switch the entire system to bypass.

A simple system is shown below.

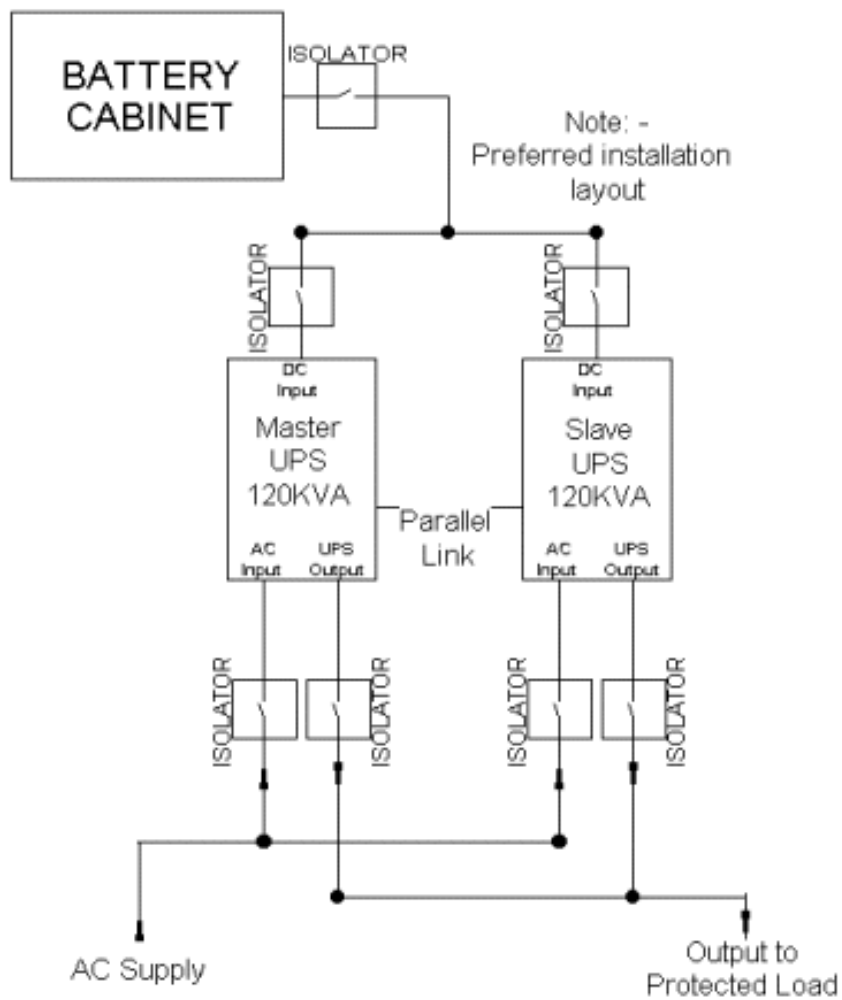

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](http://www.aelgroup.co.uk)

## hb807 Emergency Power off (EPO) and Elite ETA\RTA & ETD

UPS that this applies to

Elite ETA/RTA 700VA-3kVA

ETD 1k5VA-5kVA

The UPS is not capable of a TRUE EPO as defined by the regulations.

A shut down signal can be applied to the UPS but this is not a true Emergency Power Off because of the delays involved

The UPS is equipped with a sub-D 9 pin connector carrying the signals for the RS232 interface and for the alarms.

Apply a voltage (+5 to -15Vdc) for at least 3 seconds to pins 6 and 4 of the connector. The UPS will perform a shutdown.

Beware - if the UPS is configured (in the software) for auto restart removal of the signal will result in a UPS restart

NOTE: the RS232 communications interface needs (+10 - 15) Vdc between pins 8 and 4 in order to function correctly.

---

UK: 01978 821 000 Tel: +44 1978 821000 © [AEL Group](#)

## **hb808 Mean Time Before Failure (MTBF) and reliability ETA\RTA and ETD**

Calculating Mean Time Before Failure of a UPS is difficult when you take into account its automatic static switch bypass.

Typical figures for the Elite range are quoted as 600 000 hours.

A more meaningful representation of reliability can be gained from the Mean Time to Repair (MTR) in the case of the Elite this is less than 15 minutes. The use of matched PCBs and quick assembly techniques means the entire boardset can be changed in 30 minutes.

There is a large world population of the elite in many different geographical areas and applications and the inside warranty failure rate is less than 4%.

In addition Advance can now offer a five year warranty on the Elite unit when installed with one of our special transient suppression bypass switches

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)



## hb809 Cable length recommendations

The most common telecoms installation of an Advance UPS is at or around 1500VA.

The recommendations quoted here apply to this case and can be extrapolated for all installations. If you need any help please ring service on 01978 821 086.

### Communications cables

All units use the standard RS232 protocol. Without special equipment the cable length can run up to 200m. With special equipment (RS232 signal repeaters) this can be infinitely extended but it normally works out cheaper to use modems and a phone line. Volt free contact cable runs of 200m are also possible

### Supply cables AC

If the input cable to a UPS is properly sized distances of 50m will lead to approximately a three volt drop in supply voltage. Greater distances can be achieved by thicker cable and extreme distances can be achieved by stepping the voltage up to a suitable level for long distance transmission and then stepping it down again at the UPS input.

### DC

Supplied cables for connection to battery extension packs are 1.5m. Longer lengths are available on request. Lengths longer than 2.5m will lead to a decreased run time from the batteries due to volt drops in the cable.

### Load cables

The output of the UPS can effectively be treated as a new source of mains voltage so a further 50m can be gained if the load will accept the three volt drop. Greater distances as above. The cable should be mineral insulated 3-core with shield for optimal resistance to mains borne Radio Frequency Interference (RFI).

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb810 Battery Racks


Battery configurations that require large numbers of cells are most frequently quoted as RACKS.

This simple modular racking system either OPEN or CLADDED carries the largest number of cells for any given floor space while allowing easy access and keeping costs down.


Each rack is made up of tubular plastic coated steel with simple bolt together components. Options include fusing transition boxes DC breakers and even fully computerised battery monitoring systems.

The racks are described by their format in TIERS and ROWS. Below are diagrams illustrating this


Plan view of single  
ROW rack (1R)

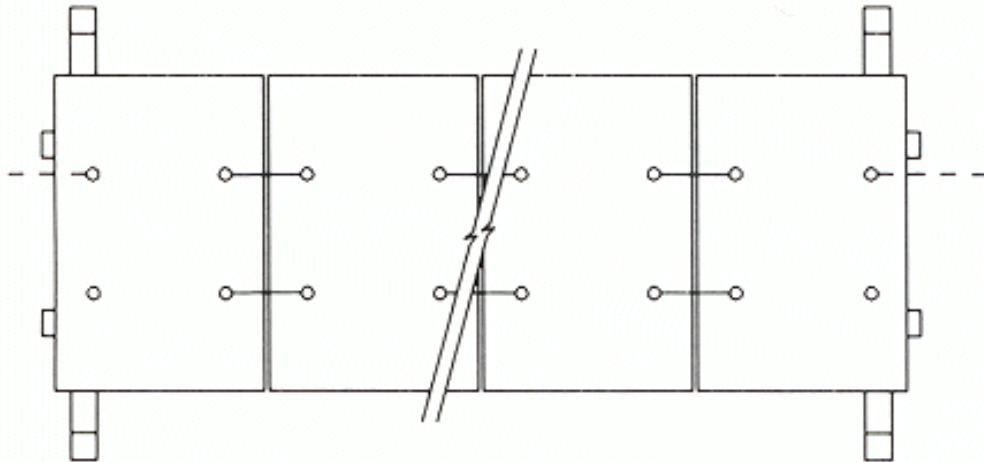


Plan view of Double  
ROW rack (2R)

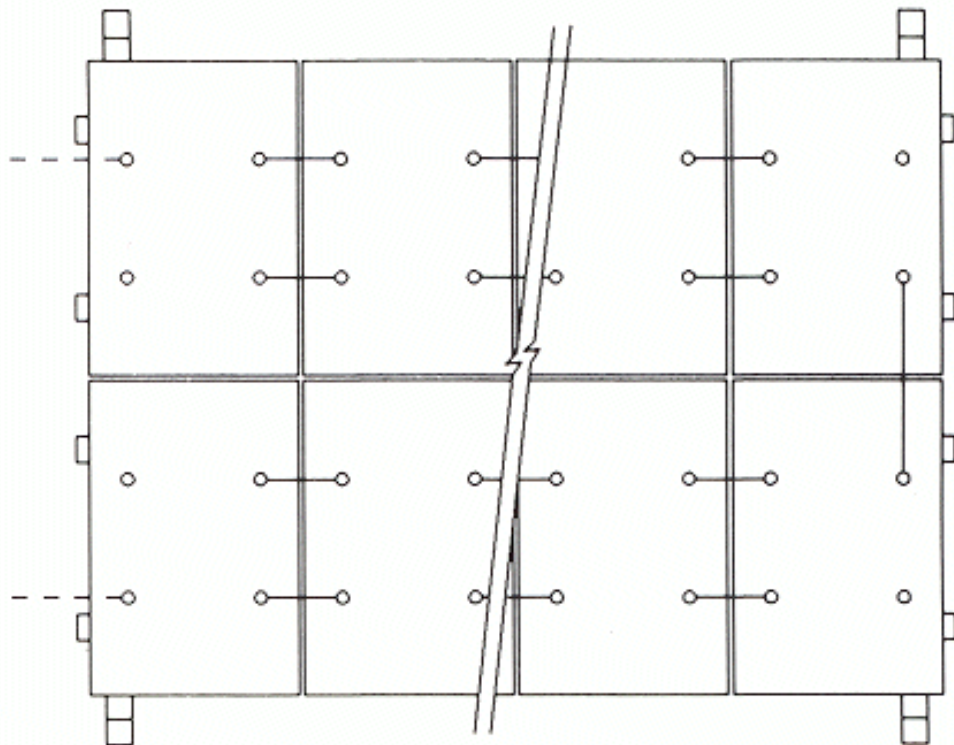

General arrangement of empty two tier single row (2T1R) rack

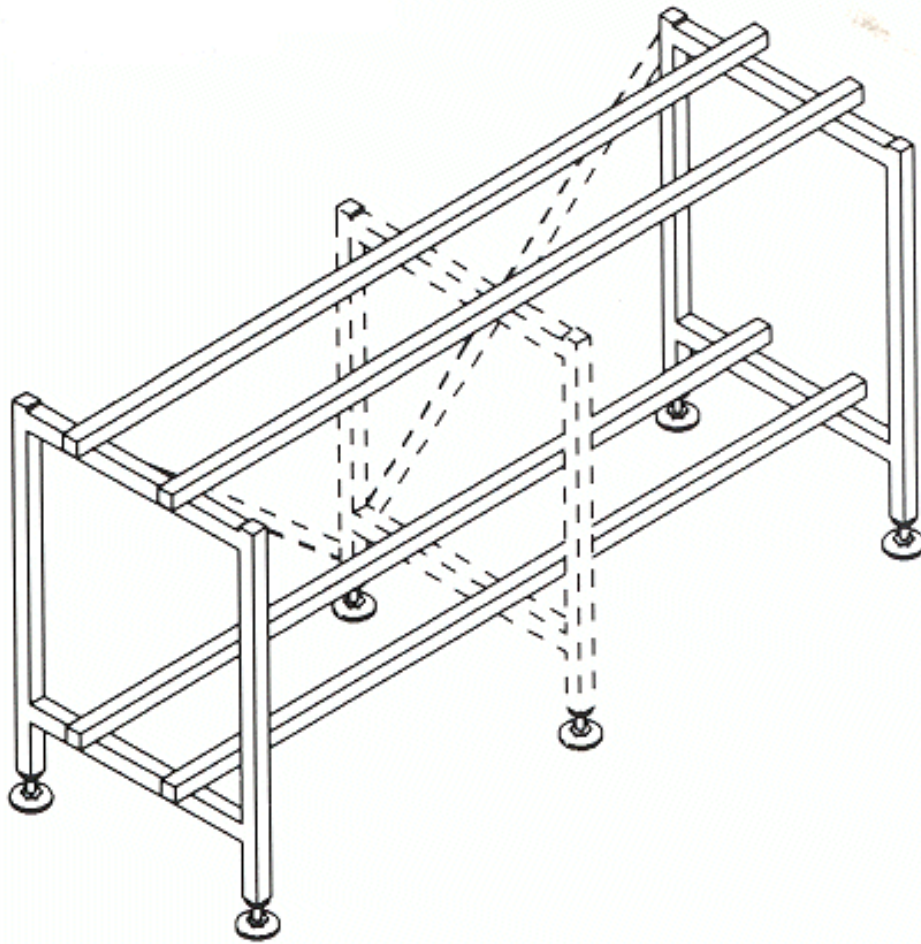

General arrangement of populated two tier single row (2T1R) rack

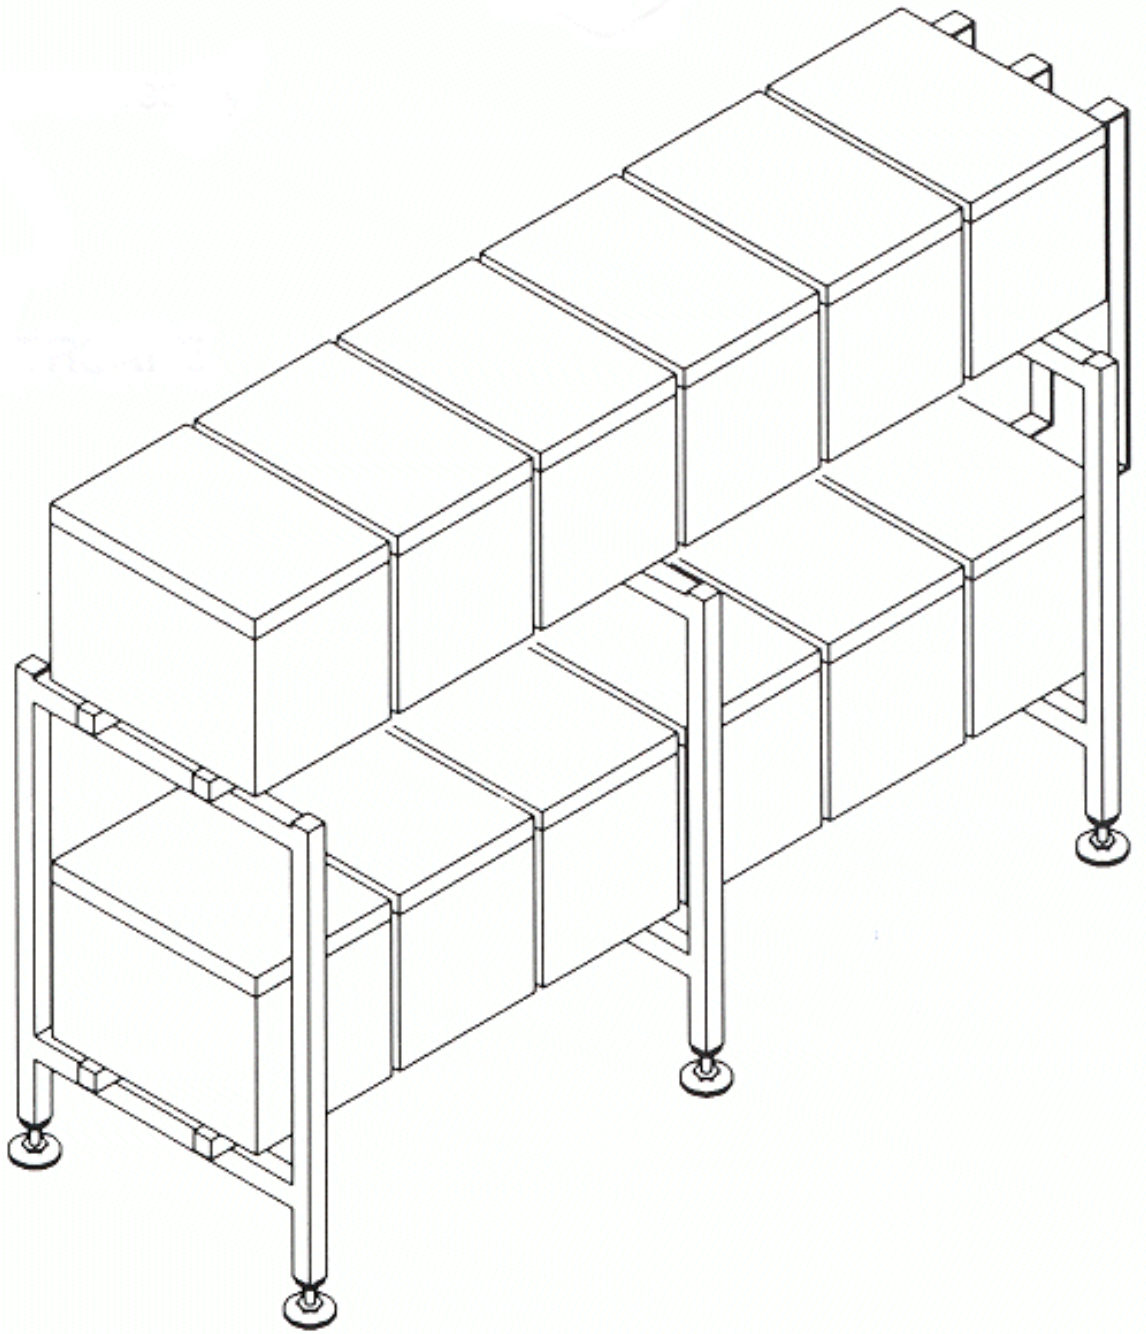



---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb811 World wide Plugs and Sockets



Advance supply plugs and sockets to suit the country and application.

United Kingdom

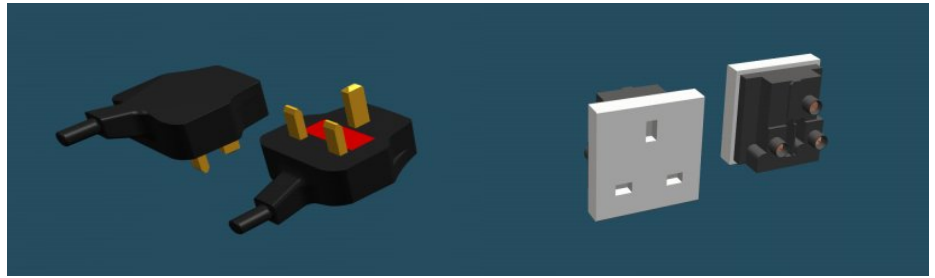


13 AMP, 250V, 3 pin, fused plugs, Approved to BS1363A and are used as standard in the U.K and the Republic of Ireland

Europe

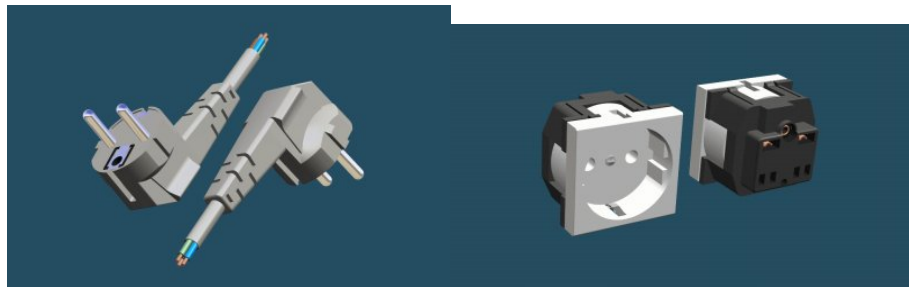

10/16 AMP, 250V, 2 pin plugs, with dual earthing contacts, commonly known as "Schuko" and are used as standard in Germany, Austria, Norway, Sweden, Finland, Holland, Belgium, France, Spain and Portugal

France

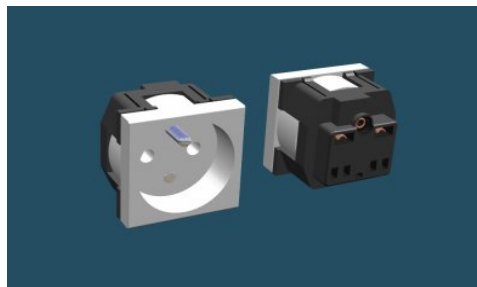

10/16 AMP, 250V, socket with earth pin "Schuko" plugs will fit and are used as standard in Belgium, France

UK: 01978 821 000

Tel: +44 1978 821000

© [AEL Group](#)

## **hb921 Safe battery disposal**

UPS batteries are generally similar to automotive batteries heavy full of environmentally unfriendly materials and of limited life

Even a single car battery requires proper disposal when it is no longer useful for it's original purpose

To assist customers in disposing of old batteries we offer 'battery removal' as a part of our services

Any customer requiring this service can be assured that we dispose of used batteries in an ecologically satisfactory manner

We have access to specialist disposal units in the Midlands for large quantities and for smaller batches we find that most local councils are equipped to manage the disposal

### **UPS disposal**

Advance will also disconnect remove and dispose of any unwanted UPS product whether or not we have supplied it

We have qualified and trained personnel who will extract the product with the minimum of interruption to the daily business routine

We guarantee to ensure that each element of the product is environmentally safe prior to disposal.

---

UK: 01978 821 000    Tel: +44 1978 821000    © [AEL Group](#)

## hb952 Safe battery handling

### Large dc voltages are more dangerous than similar ac voltages

Only trained competent people should handle large batteries. (large is anything difficult to pick up with one hand). A single battery is designed to provide huge reserves of power and a spanner across the terminals will usually spit metal and then heat up the spanner!

Special attention must be paid when working on long 'strings' of batteries which provide several opportunities for DANGER

if precautions are ignored. A string of batteries becomes more and more dangerous as the number of cells is increased. Voltages greater than 40 should be considered lethal.

### Battery String Handling Do's + Don'ts

#### DON'Ts

- Wear rings bracelets metal watch straps when working near batteries.
- Use or leave metal un-insulated tools where they could short across battery terminals.
- Work on high voltage dc strings unless another competent person is present in the room.
- Touch two points in a battery string at the same time.
- Expose batteries to naked flames or excessive heat.
- Work in an unventilated battery environment
- Force batteries into a limited space because they need to expand during use (1/Mar/2001)
- place tools or metal objects on batteries (1/Mar/2001)

#### DO's

- Cover un-insulated battery terminals and termination points with an insulating material while working on a unit.
- Make sure that any necklaces or chains are kept inside clothing and there is no danger of them dangling inside the unit or near battery terminals.
- Leave one link out of the string until the connections to the unit is made. Using a meter set to DC check for any voltage across the gap before fitting the last link. If the meter shows a voltage reading DO NOT MAKE THE CONNECTION. Check all other connections or ask for help.
- Connect the earth side of the battery last
- Be aware of what you are working on. If in doubt ASK.
- Where practical use insulated gloves and tools
- Ensure installation is in accordance with an approved drawing (1/Mar/2001)

### NEVER SHORT CIRCUIT A BATTERY THEY ARE ALWAYS LIVE AND CAN EXPLODE.

Unlike AC high dc voltages will clamp you to the source and cause massive muscle contraction. At best you will end up with burns and broken bones at worst your heart will stop.